

UNITS: INCHES

FRAME SIZE	MOTOR DIMENSIONS										CONDUIT BOX									
	A	B	C	D	G	J	K	M	O	P	T	AM[PT]	AB	AC	AE	AF	XL	XN		
5010USS	24.8	39.8	64.9	12.50	2.6	6.3	6.7	24.8	26.2	29.5	5.1	4.00	24.8	20.4	12.5	9.2	15.2	10.2		
5010US	24.8	39.8	66.3	12.50	2.6	6.3	6.7	24.8	26.2	29.5	5.1	4.00	24.8	20.4	12.5	9.2	15.2	10.2		
5010UZ	24.8	39.8	71.7	12.50	2.6	6.3	6.7	24.8	26.2	29.5	5.1	4.00	24.8	20.4	12.5	9.2	15.2	10.2		
FRAME SIZE	MOUNTING										SHAFT EXTENSION				KEY SEAT			BEARINGS		MAXIMUM WEIGHT
E	ZF	H	BA	N-W	V	U	R	S	ES	LS	OS									
5010USS	10.00	32.00	1.2	8.50	4.75	4.50	2.375	2.021	0.625	3.00	6.313C3	6.313C3	NU313C3	6.320C3	6.320C3	4650	lbs.			
5010US	10.00	32.00	1.2	8.50	6.25	6.19	3.625	3.134	0.875	5.00	6.320C3	6.320C3	6.320C3	6.320C3	6.320C3					
5010UZ	10.00	32.00	1.2	8.50	11.62	11.38	4.375	3.817	1.000	10.00	NU324C3	6.324C3	6.320C3	6.320C3	6.320C3					

TAG NO's:

CUSTOMER: _____ MOTOR MODEL NO.: _____
 P.O. NO.: _____ HP: _____ VOLTAGE: _____ RPM(SYN): _____ HZ: _____
 FRAME SIZE: _____ PRODUCT TYPE: IEF3 EQP III 840 & 841
 COMMENTS: _____

 PER: _____ DATE: _____

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE PRELIMINARY
 DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED CERTIFIED

- STANDARD (NO AUX. BOXES)
- RTD AUX. BOX
- SPACE HEATER AUX. BOX
- BEARING RTD's

- NOTES:
- DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT
 - MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 - KEY DIMENSIONS EQUAL S x S x 10.00 FOR UZ, S x S x 5.00 FOR US, AND S x S x 3.00 FOR USS (MOTOR SUPPLIED WITH KEY)
 - MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME
 - STANDARD 4-8 POLE PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE
 - STANDARD 2 POLE PRODUCT USES UNI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY FAN AND CONNECTION CHANGE

TOSHIBA
 TOSHIBA INTERNATIONAL CORPORATION

TOTALLY-ENCLOSED FAN-COOLED
 HORIZONTAL FOOT-MOUNTED
 3 PHASE INDUCTION MOTOR
 F1 ASSEMBLY

XT SERIES
 VISIT OUR WEBSITE AT:
 www.toshiba.com/ind

TYPICAL MOTOR PERFORMANCE DATA

Model: F4006FLG3BMHD

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
400	298	6	1190	5010US	460	60	3	480
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	56	F	1.15	CONT	95.8	-		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	400.00	298.3	480	96.0	81.3
¾ Load	300.00	223.7	378	95.1	78.0
½ Load	200.00	149.1	287	93.1	70.0
¼ Load	100.00	74.6	215	87.0	50.0
No Load			177.2		3.2
Locked Rotor			3196		26.9

Torque				Rotor wk ²
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	Inertia (lb-ft ²)
1767	200	145	240	239.95

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
21	4	-	6320C3	6320C3	4998

*Bearings are the only recommended spare part(s).

Motor Options:
Product Family:EQP Global 840
Mounting:Footed,Shaft:US Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


Engineering	zxie	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	9/24/2021	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

SPEED TORQUE/CURRENT CURVE

Model: F4006FLG3BMHD

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
400	298	6	1190	5010US	460	60	3	480
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	56	F	1.15	CONT	95.8	-		40 C
Locked Rotor Amps	Rotor wk ² Inertia (lb-ft ²)	Torque						Break Down (%)
		Full Load (lb-ft)	Locked Rotor (%)	Pull Up (%)				
3196	239.95	1767	200	145			240	

Design Values

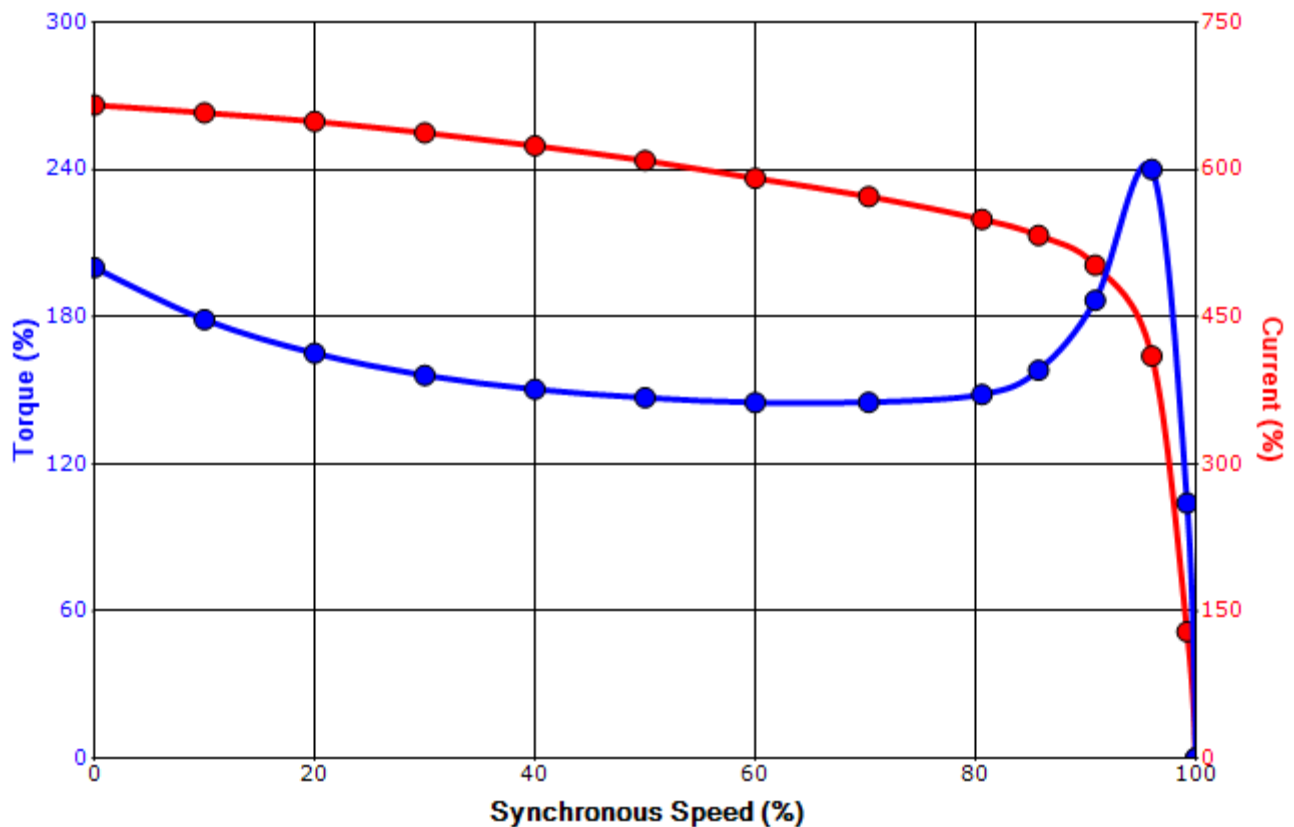

Customer		wk ² Load Inertia (lb-ft ²)	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering	zxie	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	9/24/2021	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

Motor Connection Diagram
3 Leads - Delta Connection



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.
If multiple cables represent a single lead, each one
of them will be labeled with the appropriate lead number.