

#### NOTES:

- 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
- 2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
- 3. KEY DIMENSIONS EQUAL

0.250"x 0.250"x 1.75"

(MOTOR SUPPLIED WITH KEY)

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE

PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED

X CERTIFIED



TOTALLY ENCLOSED FAN COOLED
HORIZONTAL FOOT MOUNTED
3 PHASE INDUCTION MOTOR
182T-184T F1 ASSEMBLY



Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

#### **TYPICAL MOTOR PERFORMANCE DATA**

Model: 0026SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	6	1175	184T	230/460	60	3	6.6/3.3
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	88.5	В		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)	
Full Load	2.00	1.5	3.3	89.0	63.5	
¾ Load	1.50	1.1	2.9	86.8	55.1	
∕₂ Load	1.00	0.7	2.4	82.9	46.5	
4 Load	0.50	0.4	2.3	69.7	28.9	
No Load			2.2		5.5	
Locked Rotor			25		39.6	

Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia			
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)			
8.94	310	215	490	0.59			

Safe Stall	Safe Stall Time(s) Sound		Bearin	Bearings*		
Cold	Hot	Pressure			Approx. Motor Weight	
oolu	1100	dB(A) @ 1M	DE	NDE	(lbs)	
35	15	-	6306ZZC3	6306ZZC3	104	

\*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

	TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	spinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0				
Engr. Date	8/6/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011				



Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

#### **TYPICAL MOTOR PERFORMANCE DATA**

Model: 0026SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	6	960	184T	190/380	50	3	7.6/3.8
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	84.0	В		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	2.00	1.5	3.8	86.5	62.5
¾ Load	1.50	1.1	3.1	85.5	54.6
½ Load	1.00	0.7	2.7	84.5	42.8
∕₄ Load	0.50	0.4	2.4	71.8	31.7
No Load			2.2		6.1
Locked Rotor			30		44.1

Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia			
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)			
10.9	270	215	335	0.59			

Safe Stall	Time(s)	Sound	Bearin	ue*	Approx. Motor Weight	
Cold	Hot	Pressure	Bearin	ys ————————————————————————————————————	Approx. Motor Weight	
Colu	1100	dB(A) @ 1M	DE	NDE	(lbs)	
46	38	-	6306ZZC3	6306ZZC3	104	

\*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	jhock	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0			
Engr. Date	4/7/2014	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date	ued Date 6/19/2025		
Issued By	dschoeck	Issued Rev	

### SPEED TORQUE/CURRENT CURVE

Model: 0026SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps	
2	1.5	6	1175	184T	230/460	60	3	6.6/3.3	
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)	
TEFC	55	F	1.15	CONT	88.5	В		40 C	
Laskad Datas	Rotor wk <sup>2</sup>	Torque							
Locked Rotor Amps	Inertia	nertia Full Load Locked Rotor		Pull Up		Break Down			
Amps	(lb-ft²)	(lb-ft)	(%	(%)			(%	<b>6</b> )	
25	0.59	8.94	310		215		49	90	

# Design Values

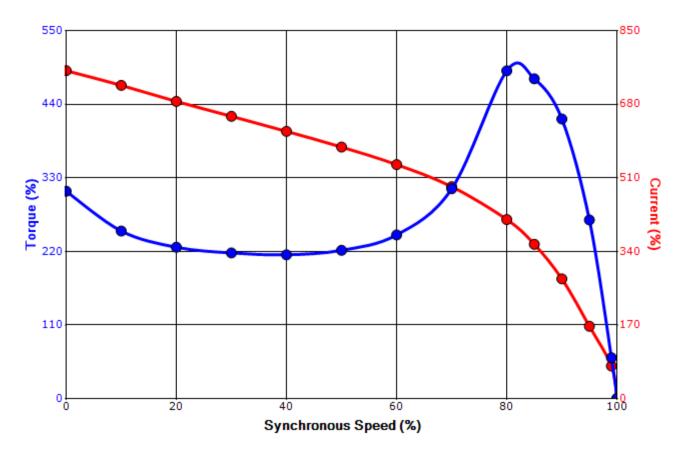



Customer	wk² Load Inertia (Ib-f	2) -
Customer PO	Load Typ	е -
Sales Order	Voltage (%	6) 100
Project #	Accel. Tim	е -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	spinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0			
Engr. Date	8/6/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date	ed Date 6/19/2025		
Issued By	dschoeck	Issued Rev	

### SPEED TORQUE/CURRENT CURVE

Model: 0026SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	6	960	184T	190/380	50	3	7.6/3.8
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	84.0	В		40 C
Looked Deter	Rotor wk <sup>2</sup>				Torque			
Locked Rotor Amps	Inertia	Full Load	Locked Rotor		Pull Up		Break Down	
Amps	(lb-ft²)	(lb-ft)	(%	(%)			(%	<b>6</b> )
30	0.59	10.9	270		215		335	

# Design Values

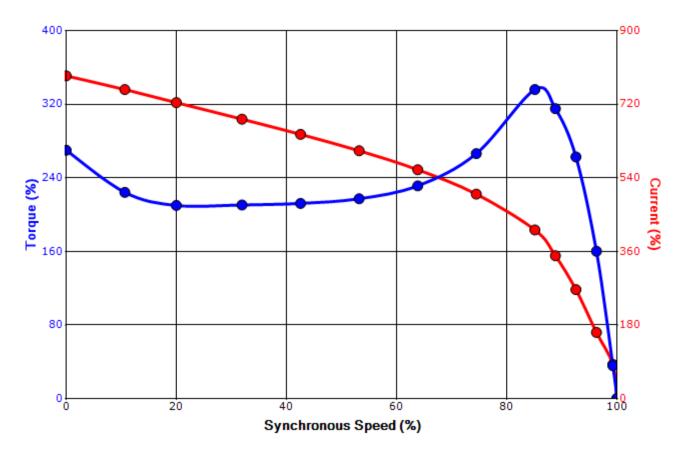




Customer	wk² Load Inertia (Ib-f	2) -
Customer PO	Load Typ	е -
Sales Order	Voltage (%	6) 100
Project #	Accel. Tim	е -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	jhock	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0			
Engr. Date	4/7/2014	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			

# Motor Connection Diagrams 9 Leads

## Across-the-Line Starting / Running Connections

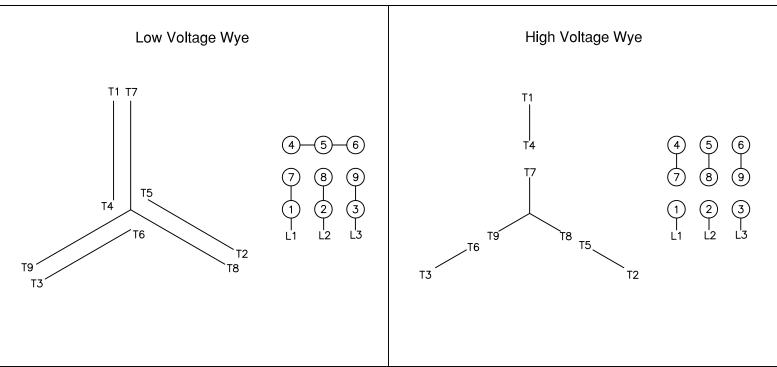

Switch L1 and L2 to reverse rotation

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 0



Issued Date:	6/19/2025	Transmit #:	
Issued By:	dschoeck	Issued Rev:	

#### **SPARE PARTS LIST\***

Model: 0026SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	6	1175	184T	230/460	60	3	6.6/3.3
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	88.5	В		40 C

 Bearings DE
 6306ZZC3 / 30BC03JPP3OA

 Bearings NDE
 6306ZZC3 / 30BC03JPP3OA

\*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.							
Engineering	spinzon	Doc. Written By	D. Suarez	Doc.#/Rev	MPCF-1125 / 0		
Engr. Date	8/6/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011		