


- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
  2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
  3. KEY DIMENSIONS EQUAL (MOTOR SUPPLIED WITH KEY)
- 0.250" x 0.250" x 1.75"

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

<p><b>180T-BRAKE TEFC FRAME F1 ASSEMBLY</b></p> <p>MDSL131-02</p> <p><b>TOSHIBA</b> TOSHIBA INTERNATIONAL CORPORATION</p>	<p>TOLERANCES</p> <p>.X .1</p> <p>.XX .03</p> <p>.XXX .005</p> <p>.XXXX .0005</p> <p>MAXIMUM MOTOR WEIGHT</p> <p>97 lbs.</p> <p>44 kgs.</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;"></td> <td style="width: 15%;"></td> <td style="width: 15%;"></td> <td style="width: 15%;"></td> <td style="width: 15%;"></td> <td style="width: 15%;"></td> </tr> <tr> <td style="text-align: center;">0</td> <td>FIRST ISSUE</td> <td style="text-align: center;">M.EASTERBROOK</td> <td style="text-align: center;">6/4/2013</td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">NO</td> <td style="text-align: center;">REVISION</td> <td style="text-align: center;">DRAWN BY</td> <td style="text-align: center;">DATE</td> <td style="text-align: center;">CHECK</td> <td></td> </tr> </table>							0	FIRST ISSUE	M.EASTERBROOK	6/4/2013			NO	REVISION	DRAWN BY	DATE	CHECK		 <p>DRAWN BY: M. EASTERBROOK</p> <p>CHECK BY: _____</p> <p>APPROVED BY: _____</p> <p style="text-align: right;"><a href="http://www.toshiba.com/ind">www.toshiba.com/ind</a></p>
0	FIRST ISSUE	M.EASTERBROOK	6/4/2013																		
NO	REVISION	DRAWN BY	DATE	CHECK																	

**TYPICAL MOTOR PERFORMANCE DATA**

Model: 0026SDBC41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	6	1175	184T	575	60	3	2.5
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	88.5	B		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	2.00	1.5	2.5	89.2	66.2
¾ Load	1.50	1.1	2.2	87.2	58.2
½ Load	1.00	0.7	1.6	84.7	52.9
¼ Load	0.50	0.4	1.6	71.0	32.2
No Load			1.6		5.9
Locked Rotor			20		39.7

Torque				Rotor wk <sup>2</sup>
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	Inertia (lb-ft <sup>2</sup> )
8.94	305	215	485	0.59

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
35	15	-	6306ZZC3	6306ZZC3	

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
Product Family:EQP Global Brake  
Mounting:Footed,Shaft:T Shaft  
Brake Torque (lb-ft): 15.00

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**


Engineering	spinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	8/6/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

**SPEED TORQUE/CURRENT CURVE**

Model: 0026SDBC41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	6	1175	184T	575	60	3	2.5
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	88.5	B		40 C
Locked Rotor Amps	Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> )	Torque						Break Down (%)
		Full Load (lb-ft)	Locked Rotor (%)	Pull Up (%)				
20	0.59	8.94	305	215			485	

**Design Values**

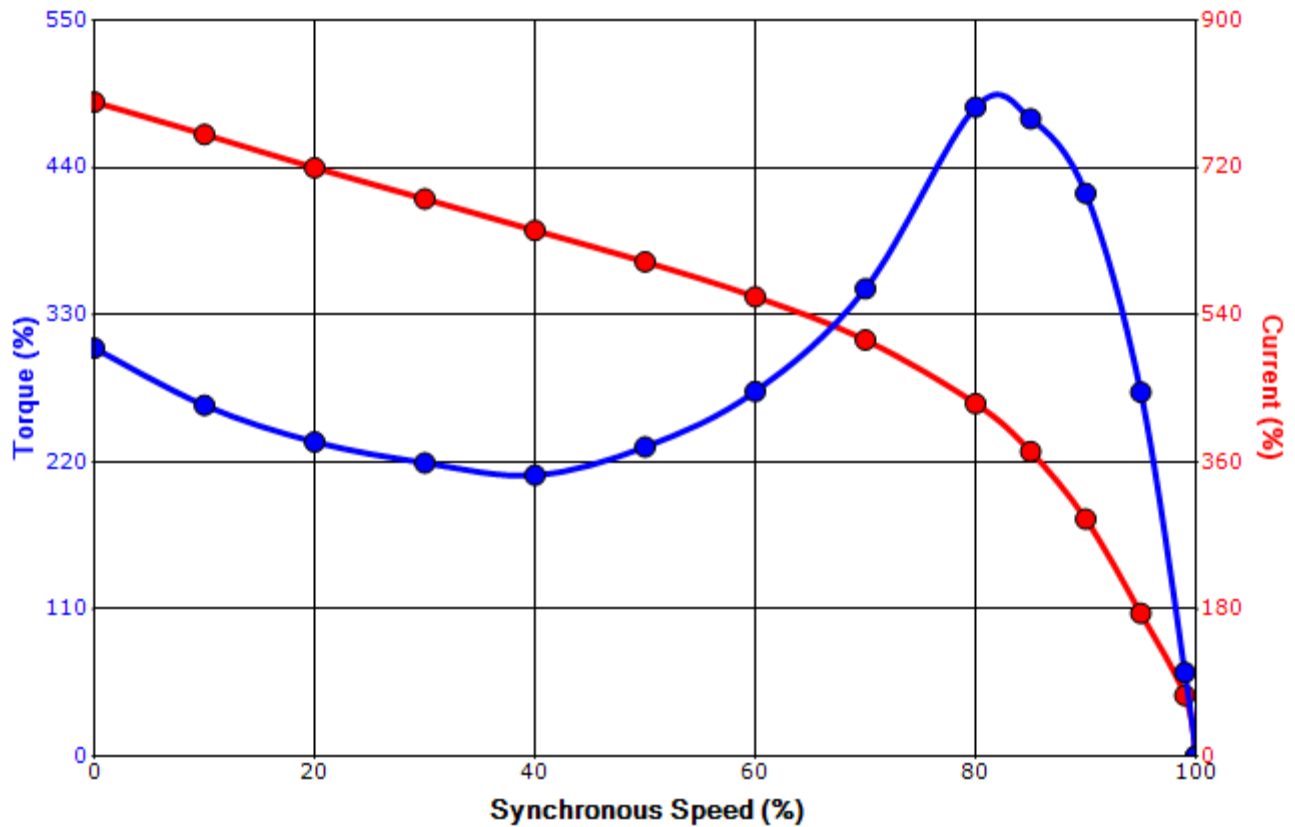

Customer		wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> )	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**

Engineering	spinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	8/6/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

# Motor Connection Diagram

## 3 Leads - Wye Connection

### Single Voltage



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one of them will be labeled with the appropriate lead number.