



Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0056SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
5	3.7	6	1160	215T	230/460	60	3	13.8/6.9
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	89.5	В	J	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	5	3.7	6.9	89.6	78.2
¾ Load	3.75	2.8	5.3	89.7	73.2
½ Load	2.50	1.9	4.3	88.2	63.0
¼ Load	1.25	0.9	3.6	80.9	39.7
No Load			3.1		5.5
Locked Rotor			45.5		45.6

Torque						
Full Load	Locked Rotor	Pull Up	Break Down	Inertia		
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)		
22.6	185	175	330	1.32		

Safe Stall	Time(s)	Sound	Bearin	une*	Approx. Motor Weight	
Cold	Hot	Pressure dB(A) @ 1M	DE	NDE	(lbs)	
35	15	-	6308ZZC3	6308ZZC3	176	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

Till Gridiadionolide are av	i dia addicino di o a forago di ponto a fanado.									
	TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.									
Engineering	aacosta	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 1					
Engr. Date	4/19/2012	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019					



Issued Date 12/18/2019		Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0056SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
5	3.7	6	955	215T	190/380	50	3	18.0/9.0
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	85.5	В	J	40 C

	_				
Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	5	3.7	9.0	89.7	69.5
¾ Load	3.75	2.8	6.1	90.0	65.3
½ Load	2.50	1.9	4.7	88.8	56.2
¼ Load	1.25	0.9	3.7	82.6	46.0
No Load			3.0		5.7
Locked Rotor			55		59.0

Torque						
Full Load	Locked Rotor	Pull Up	Break Down	Inertia		
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)		
27.5	190	175	230	1.32		

Safe S	all Time(s)	Sound	Rearin	ine*	Approx. Motor Weight	
Cold	Hot	Pressure dB(A) @ 1M	Bearings* DE NDE		(lbs)	
30	20	-	6308ZZC3	6308ZZC3	176	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	jhock	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 1			
Engr. Date	4/8/2014	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019			




Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0056SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
5	3.7	6	1160	215T	230/460	60	3	13.8/6.9
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	89.5	В	J	40 C
Looked Dates	Rotor wk ²				Torque			
Locked Rotor Amps	Inertia	Full Load	Locked	l Rotor	Pull U	р	Break	Down
Allips	(lb-ft²)	(lb-ft)	(%	6)	(%)		(%	6)
45.5	1.32	22.6	185		175		33	30

Design Values

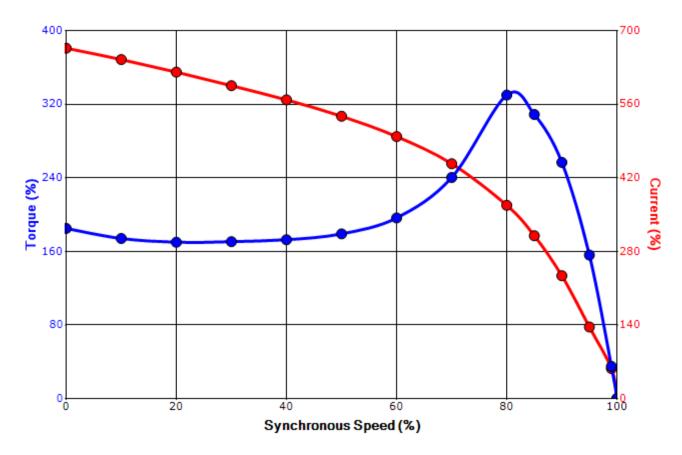

Torque	Current
--------	---------

Customer	wk² Load Inertia (lb-	
Customer PO	Load Ty	oe -
Sales Order	Voltage (/6) 100
Project #	Accel. Tir	re -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	aacosta	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121/1			
Engr. Date	4/19/2012	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019			




Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0056SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
5	3.7	6	955	215T	190/380	50	3	18.0/9.0
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	85.5	В	J	40 C
Laskad Datas	Rotor wk ²	Torque						
Locked Rotor Amps	Inertia	Full Load	Locked	l Rotor	Pull U	p	Break	Down
Allips	(lb-ft²)	(lb-ft)	(%	6)	(%)		(%	%)
55	1.32	27.5	190		175		2	30

Design Values

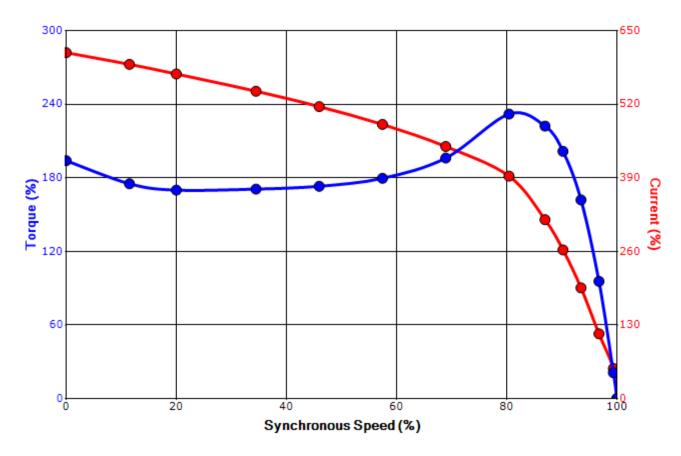



Customer	wk² Load Inertia (lb-	
Customer PO	Load Ty	oe -
Sales Order	Voltage (/6) 100
Project #	Accel. Tir	re -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.							
Engineering	jhock	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121/1		
Engr. Date	4/8/2014	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019		

Motor Connection Diagrams 12 Leads

Across-the-Line Starting / Running Connections

Low Voltage Delta



High Voltage Delta



Switch L1 and L2 to reverse rotation

Suitable for Wye-Delta Starting and Limited Part-Winding-Starting. Please Contact Toshiba International for specific connections.

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 1