

- 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
- 2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
- 3. KEY DIMENSIONS EQUAL

0.375"x 0.375"x 2.88"

(MOTOR SUPPLIED WITH KEY)

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE

PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED

X CERTIFIED



TOTALLY ENCLOSED FAN COOLED
ROUND BODY C-FACED
3 PHASE INDUCTION MOTOR
254TC-256TC F1 ASSEMBLY

DRAWING #:	MDSLV205-	04		
REV. DATE:	06/29/18	REV. #:	1	PER.: M. O'DOWD
REV. DESCRIP.:				



Issued Date	6/20/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0154SDSC44A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
15	11	4	1770	254TC	575	60	3	16.1
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	92.4	В		40 C

Load	HP	kW	Amperes Efficiency (%)		Power Factor (%)
Full Load	15.00	11.2	16.1	92.5	75.5
¾ Load	11.25	8.4	12.9	91.6	71.2
∕₂ Load	7.50	5.6	10.0	89.2	62.5
¼ Load	3.75	2.8	6.8	82.5	49.6
No Load			7.8		4.7
Locked Rotor			93		37.3

Torque						
Full Load	Break Down	Inertia				
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)		
44.5	235	175	275	2.32		

Safe Stall	Safe Stall Time(s) Sound		Bearin	Approx. Motor Weight		
Cold	Hot	Pressure dB(A) @ 1M	Bearings*		Approx. wiotor weight	
Colu	d Hot d		DE	NDE	(lbs)	
35	15	-	6309ZZC3	6309ZZC3	284	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:C-Face Round,Shaft:T Shaft

С	ustomer	
С	ustomer PO	
S	ales Order	
P	roject #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0			
Engr. Date	5/5/2025	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date 6/20/2025		Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0154SDSC44A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
15	11	4	1770	254TC	575	60	3	16.1
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	92.4	В		40 C
Looked Dates	Rotor wk ²	Torque						
Locked Rotor Amps	Inertia	Full Load	oad Locked Rotor		Pull Up		Break	Down
Allips	(lb-ft²)	(lb-ft)	(%	6)	(%)		(%	%)
93	2.32	44.5	235		175		27	75

Design Values

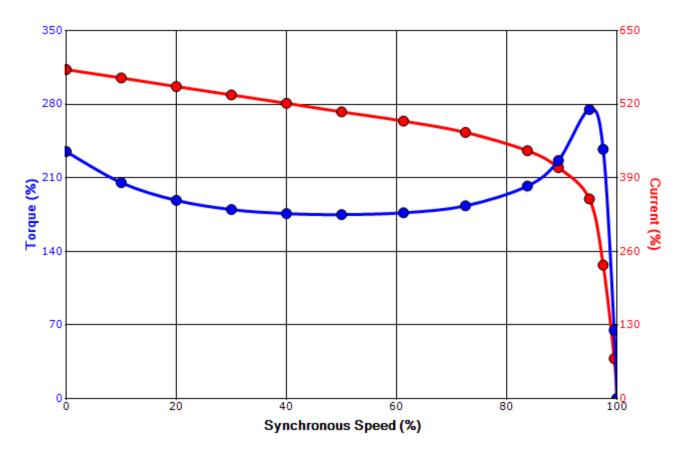



Customer	wk² Load Inertia (lb-ft²)	-
Customer PO	Load Type	-
Sales Order	Voltage (%)	100
Project #	Accel. Time	_


Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0			
Engr. Date	5/5/2025	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			


Motor Connection Diagrams 6 Leads

Across the Line Starting / Run - Delta:





Alternate Starting Connection - Wye:

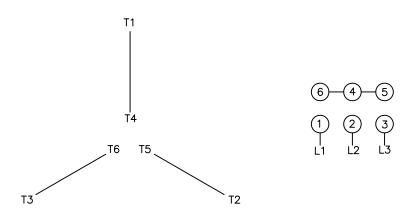

Switch L1 and L2 to reverse rotation



Issued Date:	6/20/2025	Transmit #:	
Issued By:	dschoeck	Issued Rev:	

SPARE PARTS LIST*

Model: 0154SDSC44A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
15	11	4	1770	254TC	575	60	3	16.1
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	92.4	В		40 C

 Bearings DE
 6309ZZC3 / 45BC03JPP3OX

 Bearings NDE
 6309ZZC3 / 45BC03JPP3OX

*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1125 / 0			
Engr. Date	5/5/2025	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			