



UNITS: INCHES

FRAME SIZE	MOTOR DIMENSIONS											CONDUIT BOX DIMENSIONS						
	A	B	C	D	G	J	K	M	O	P	T	AA(NPT)	AB	AC	AE	AF	XL	XN
N447TS/N449TS	22.0	36.6	56.5	11.00	1.4	4.5	14.6	22.4	24.8	27.3	3.2	3.00	27.0	21	11.00	7.2	15.3	14.7
N447T/N449T	22.0	36.6	60.3	11.00	1.4	4.5	14.6	22.4	24.8	27.3	3.2	3.00	27.0	21	11.00	7.2	15.3	14.7

FRAME SIZE	MOUNTING			SHAFT EXTENSION			KEY SEAT			BEARINGS				MAXIMUM WEIGHT		
	E	2F	H	BA	N-W	V	U	R	S	ES	LS 2P	OS 2P	LS ROLLER 4~8P		LS BALL 4~8P	OS 4~8P
N447TS/N449TS	9.00	20.00/25.00	0.81	7.50	4.75	4.50	2.375	2.021	0.625	3.03	6313C3	6313C3	-	6318C3	6318C3	4200 lbs.
N447T/N449T	9.00	20.00/25.00	0.81	7.50	8.50	8.25	3.375	2.88	0.875	6.91	-	-	NU318C3	6318C3	6318C3	4200 lbs.

- NOTES:
- DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT.
 - MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS.
 - KEY DIMENSIONS EQUAL S x S x 6.88 FOR 'T' AND S x S x 3.00 FOR 'TS' (MOTOR SUPPLIED WITH KEY).
 - MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME.
 - STANDARD 2 POLE PRODUCT USE UNI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY FAN AND CONNECTION CHANGE.
 - STANDARD 4~8 POLE PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
 - THIS DIMENSION EQUALS 2F FOR N447 MOUNTING

CUSTOMER: _____ MOTOR MODEL NO.: _____
 P.O. NO.: _____ HP: _____ VOLTAGE: _____ RPM(SYN.): _____ Hz: _____
 FRAME SIZE: _____ PRODUCT TYPE: TEFC EXPLOSION PROOF; CLASS I GROUP D; CLASS II GROUPS E, F, G
 COMMENTS: _____

 PER: _____ DATE: _____

TAG NO's.:

- STANDARD (NO AUX. BOXES)
- RTD AUX. BOX
- SPACE HEATER AUX. BOX
- BEARING RTD's

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE PRELIMINARY
 DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED CERTIFIED

TOSHIBA

TOSHIBA INTERNATIONAL CORPORATION

TOTALLY-ENCLOSED FAN-COOLED
 HORIZONTAL FOOT-MOUNTED
 3 PHASE INDUCTION MOTOR
 F1 ASSEMBLY

XT SERIES

VISIT OUR WEBSITE AT:
www.toshiba.com/ind

TYPICAL MOTOR PERFORMANCE DATA

Model: 3003XPEB41B

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
300	224	2	3583		460	60	3	320
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC		F	1.15	CONT	95.8	A		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	300.00	223.7	319	95.9	91.6
¾ Load	225.00	167.8	244	94.8	90.8
½ Load	150.00	111.9	172	92.6	87.8
¼ Load	75.00	55.9	107	86.1	75.6
No Load			36.9		11.5
Locked Rotor			2473		25.4

Torque				Rotor wk² Inertia (lb-ft²)
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	
440	195	155	325	116.14

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
23	13	-	6313C3	6313C3	3900

*Bearings are the only recommended spare part(s).

Motor Options:
Product Family:EQP Global Explosion Proof

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


Engineering	aguerrretaz	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	11/8/2023	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

SPEED TORQUE/CURRENT CURVE

Model: 3003XPEB41B

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
300	224	2	3583		460	60	3	320
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC		F	1.15	CONT	95.8	A		40 C
Locked Rotor Amps	Rotor wk ² Inertia (lb-ft ²)	Torque				Pull Up (%)	Break Down (%)	
		Full Load (lb-ft)	Locked Rotor (%)					
2473	116.14	440	195		155	325		

Design Values

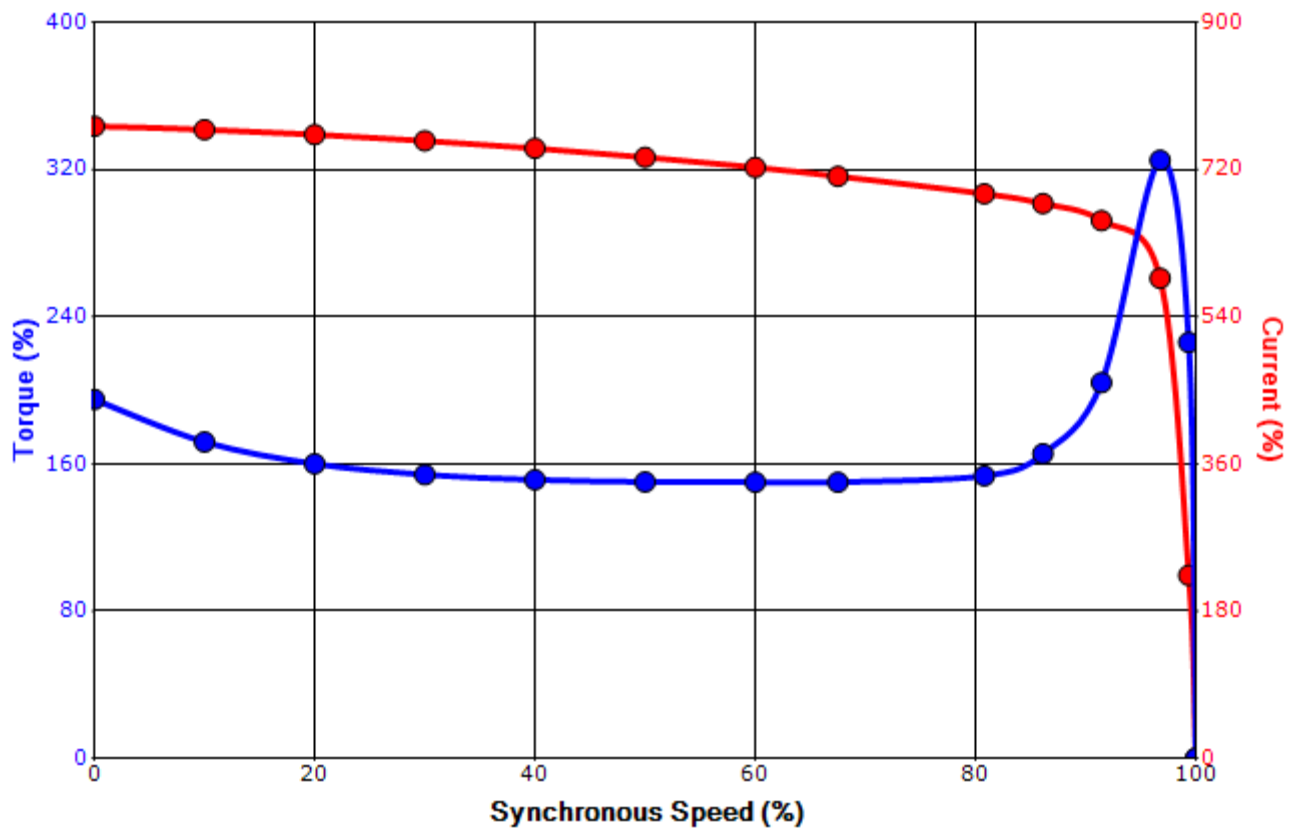

Customer		wk ² Load Inertia (lb-ft ²)	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering	aguerrretaz	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	11/8/2023	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

Motor Connection Diagrams
6 Leads

Across the Line Starting / Run - Delta:



Alternate Starting Connection - Wye:



Switch L1 and L2 to reverse rotation