

MDSL0001-09CW R11



Issued Date	9/24/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: B1251FLG3USH

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
125	90	2	3575	444TS	460	60	3	139
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	F	1.15	CONT	95.4	В	G	40 C

Load	HP	kW	V Amperes Efficience		Power Factor (%)
Full Load	125	93.2	139.0	95.3	88.2
¾ Load	93.75	69.9	108.9	95.2	87.5
½ Load	62.50	46.6	79.6	94.8	84.3
¼ Load	31.25	23.3	54.9	86.4	61.6
No Load			36.0		7.4
Locked Rotor			907		32.8

Torque							
Full Load	Full Load Locked Rotor Pull Up Break D						
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)			
184	215	140	265	32.61			

Safe Stall	tall Time(s) Sound Bearings*		Approx. Motor Weight			
Cold	Hot	Pressure	<u> </u>			
		dB(A) @ 1M	DE	NDE	(Ibs)	
20.2	11.1	-	6313C3	6313C3	1988	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:TS Shaft

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	amills	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 1			
Engr. Date	2/10/2012	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019			




Issued Date	9/24/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: B1251FLG3USH

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
125	90	2	3575	444TS	460	60	3	139
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	F	1.15	CONT	95.4	В	G	40 C
Laskad Datas	Rotor wk ²				Torque			
Locked Rotor Amps	Inertia	Full Load	Locked	Rotor	Pull Up)	Break	Down
Allips	(lb-ft²)	(lb-ft)	(%)		(%)		(%)	
907	32.61	184	215		140		265	

Design Values

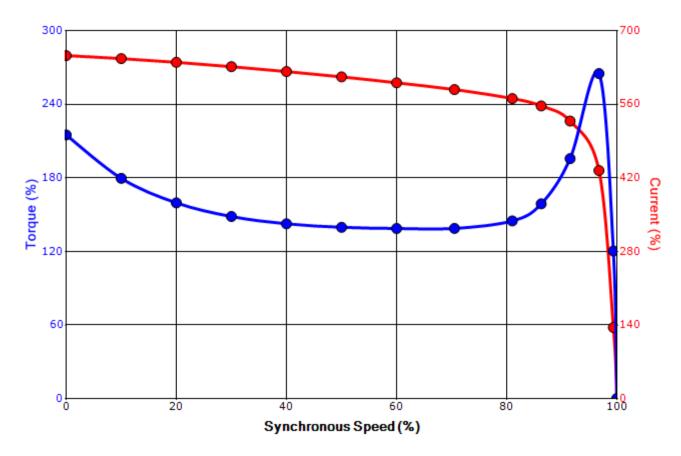



Customer	wk² Load Inertia (Ib-ft²)	-
Customer PO	Load Type	-
Sales Order	Voltage (%)	100
Project #	Accel. Time	-

Tag:


All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	amills	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121/1			
Engr. Date	2/10/2012	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019			


Motor Connection Diagrams 12 Leads

Across-the-Line Starting / Running Connections

Low Voltage Delta

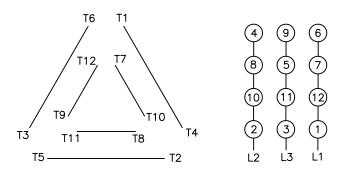

High Voltage Delta

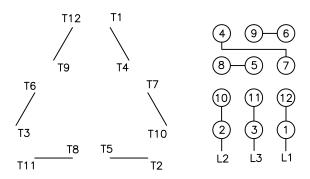

Switch L1 and L2 to reverse rotation

Suitable for Wye-Delta Starting and Limited Part-Winding-Starting. Please Contact Toshiba International for specific connections.

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 1