



kW

11

IP

55

HP

15.00

11.25

7.50

3.75

Pole

4

Ins. Class

F

kW

11.2

8.4

5.6

2.8

		Issued Date	6/20/2025		Transmit #	
		Issued By	dschoeck		Issued Rev	
TYPI	CAL MOTO	R PERFORM	ANCE DATA			
	FL RPM	Frame	Voltage	Hz	Phase	FL Amp
	1770	254T	460	60	3	20
6S	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
	1.15	CONT	92.4	В		40 C
	Amp		Efficiency	1 (%)	Power Fa	
	20		92.6		75.2	
	16.2		91.6		70.6 61.7	
	12.7		89.2 82.5		49.1	
	8.6 10.1		ŏ2.5		49.1	
	4.0					

Full Load				
	Locked Rotor	Pull Up	Break Down	Inertia
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)
44.5	240	185	280	2.32

Safe Stall Time(s)		Sound	Bearin	Approx. Motor Weight	
Cold Hot		Pressure	Dearin		Approx. Motor Weight
oola	not	dB(A) @ 1M	DE	DE NDE	
35	15	-	6309ZZC3	6309ZZC3	303

\*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global 840

Mounting:Footed,Shaft:T Shaft

Customer **Customer PO** Sales Order Project #

All characteristics are average expected values. TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A. Engineering bmammen Doc. Written By D. Suarez Doc.# / Rev MPCF-1119/0 Engr. Date 5/5/2025 Doc. Approved By Doc. Issued M. Campbell 6/8/2011

Enclosure

Tag:

HP

15

TEFC

Load


Full Load

3/4 Load


1⁄₂ Load

1/4 Load No Load Locked Rotor

Model: 0154XSSB41A-P

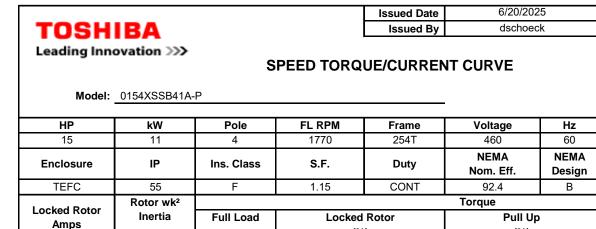

118

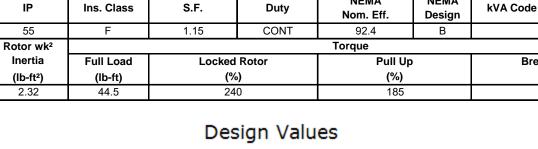

Transmit #

**Issued Rev** 

Phase

3

FL Amps

20

Ambient


(°C)

40 C

**Break Down** 


(%)


280

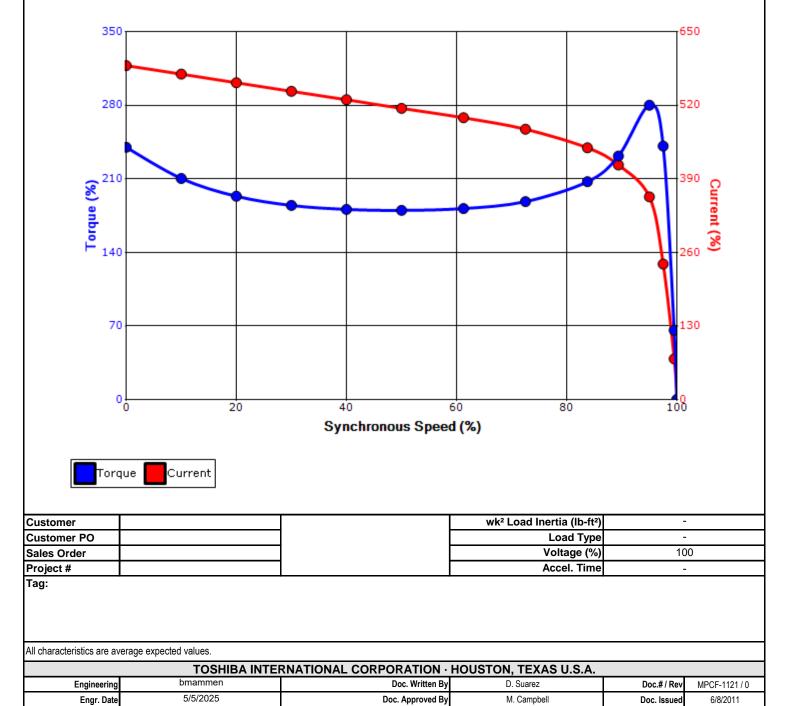

3SVD

## Motor Connection Diagram 3 Leads - Delta Connection





Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable. If multiple cables represent a single lead, each one of them will be labeled with the appropriate lead number.

				Issued Date:	6/20/20	)25	Transmit #:	
TOSHIBA				Issued By:	dschoe	eck	Issued Rev:	
Leading Inn	ovation >>>	•	SPARI	E PARTS LIS	ST*			
Model:	0154XSSB41	4-P						
Model:	0154XSSB41/	A-P Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
	-		<b>FL RPM</b> 1770	Frame 254T	Voltage 460	<b>Hz</b> 60	Phase 3	FL Amps 20
HP	kW	Pole						

\*Bearings are the only recommended spare part(s).

Bearings NDE

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

6309ZZC3 / 45BC03JPP3OX

Customer								
Customer PO								
Sales Order								
Project #								
Tag:								
All characteristics are av	erage expected values.							
TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.#/Rev	MPCF-1125 / 0			
Engr. Date	5/5/2025	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			