

UNITS: INCHES

FRAME SIZE	MOTOR DIMENSIONS										CONDUIT BOX										
	A	B	C	D	G	J	K	M	O	P	T	AA	AB	AC	AE	AF	XL	XN			
404TS	19.7	15.0	29.6	10.00	1.1	4.0	4.2	12.6	20.3	20.3	2.8	3.00	20.2	15.1	13.0	8.7	15.7	11.5			
404T	19.7	15.0	32.6	10.00	1.1	4.0	4.2	12.6	20.3	20.3	2.8	3.00	20.2	15.1	13.0	8.7	15.7	11.5			
FRAME SIZE	MOUNTING										SHAFT EXTENSION			KEY SEAT			BEARINGS			MAXIMUM WEIGHT	
404T	E	2F	H	BA	NA	V	U	R	S	ES	LS	OS									
404T	8.00	12.25	0.81	6.62	4.25	4.00	2.125	1.845	0.500	2.75	6.313C3	6.313C3	6.313C3	1050	lbs.						
404T	8.00	12.25	0.81	6.62	7.25	7.00	2.875	2.450	0.750	5.62	6.317C3	6.317C3	6.313C3	1050	lbs.						

CUSTOMER: \_\_\_\_\_ MOTOR MODEL NO.: \_\_\_\_\_ TAG NO's: \_\_\_\_\_

P.O. NO.: \_\_\_\_\_ HP: \_\_\_\_\_ VOLTAGE: \_\_\_\_\_ RPM(SYN.): \_\_\_\_\_ HZ: \_\_\_\_\_  
 FRAME SIZE: \_\_\_\_\_ PRODUCT TYPE: ODP EQP III, EPACT, & HIGH EFFICIENCY  
 COMMENTS: \_\_\_\_\_

PER: \_\_\_\_\_ DATE: \_\_\_\_\_

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE  PRELIMINARY  
 DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED  CERTIFIED

- NOTES:
1. DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT OF STRAIGHT PART OF SHAFT
  2. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
  3. KEY DIMENSIONS EQUAL S x S x 5.62 FOR T AND S x S x 2.75 FOR TS (MOTOR SUPPLIED WITH KEY)
  4. MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME
  5. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE

STANDARD (NO AUX. BOXES)  
 RTD AUX. BOX  
 SPACE HEATER AUX. BOX  
 BEARING RTD's

**TOSHIBA**  
 TOSHIBA INTERNATIONAL CORPORATION  
 OPEN DRIP-PROOF  
 HORIZONTAL FOOT-MOUNTED  
 3 PHASE INDUCTION MOTOR  
 F1 ASSEMBLY

**XT SERIES**  
 VISIT OUR WEBSITE AT:  
 www.toshiba.com/ind



Issued Date	9/24/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

### TYPICAL MOTOR PERFORMANCE DATA

Model: B0606VLF3USH

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
60	45	6	1185	404T	230/460	60	3	146/73
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
ODP	22	F	1.15	CONT	95	B	F	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	60	44.7	73.0	94.9	80.1
¾ Load	45.00	33.6	58.2	95.1	77.1
½ Load	30.00	22.4	44.6	94.7	69.1
¼ Load	15.00	11.2	34.1	89.5	45.9
No Load			25.0		3.1
Locked Rotor			392		31.1

Torque				Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> )
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	
266	175	150	235	36.20

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
32	15	-	6317C3	6313C3	1117

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
 Product Family:ODP  
 Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**

Engineering	aacosta	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 1
Engr. Date	5/18/2012	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019




Issued Date	9/24/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

### SPEED TORQUE/CURRENT CURVE

Model: B0606VLF3USH

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
60	45	6	1185	404T	230/460	60	3	146/73
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
ODP	22	F	1.15	CONT	95	B	F	40 C
Locked Rotor Amps	Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> )	Torque				Pull Up (%)	Break Down (%)	
		Full Load (lb-ft)	Locked Rotor (%)					
392	36.20	266	175		150	235		

### Design Values

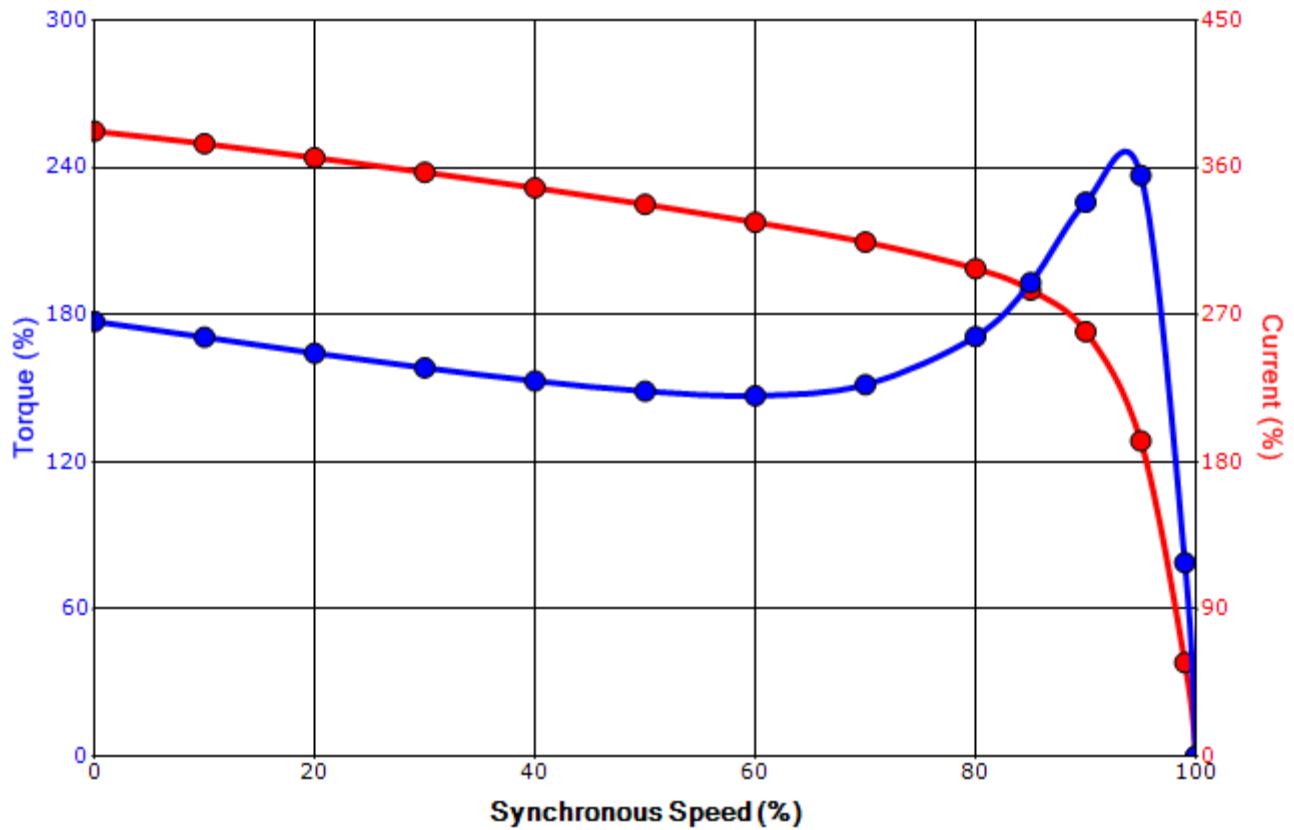

Customer		wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> )	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.


#### TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering	aacosta	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121/1
Engr. Date	5/18/2012	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019

**Motor Connection Diagrams**  
12 Leads

Across-the-Line Starting / Running Connections

Low Voltage Delta

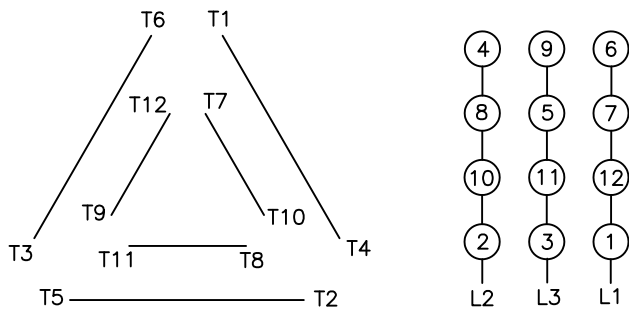

High Voltage Delta



Switch L1 and L2 to reverse rotation

Suitable for Wye-Delta Starting and Limited Part-Winding-Starting.  
Please Contact Toshiba International for specific connections.