

1.00" NPT CONDUIT

EYEBOLTS FOR VERTICAL LIFTING

- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90 INCREMENTS
  2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
  3. KEY DIMENSIONS EQUAL 0.312" x 0.312" x 2.38"

UNITS: INCHES

| BEARINGS |          | APPROX. WEIGHT |
|----------|----------|----------------|
| LS       | OS       |                |
| 6308ZZC3 | 6308ZZC3 | 186 lbs        |

CUSTOMER: \_\_\_\_\_ MOTOR MODEL NO.: \_\_\_\_\_

P.O. NO.: \_\_\_\_\_ HP: \_\_\_\_\_ VOLTAGE: \_\_\_\_\_ RPM(SYN.): \_\_\_\_\_ HZ: \_\_\_\_\_

FRAME SIZE: 210T PRODUCT TYPE: COOLING TOWER

COMMENTS: \_\_\_\_\_

PER: \_\_\_\_\_ DATE: \_\_\_\_\_

TAG NUMBERS

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

- STANDARD (NO AUX. BOXES)
- RTD AUX. BOX
- SPACE HEATER AUX. BOX
- BEARING RTD's

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE  PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED  CERTIFIED



MDSL505-03  
 TOTALLY ENCLOSED AIR OVER  
 3 PHASE INDUCTION MOTOR  
 F1 ASSEMBLY



**TYPICAL MOTOR PERFORMANCE DATA**

Model: 0056FAGR41A-P

| HP        | kW  | Pole       | FL RPM | Frame | Voltage        | Hz          | Phase    | FL Amps      |
|-----------|-----|------------|--------|-------|----------------|-------------|----------|--------------|
| 5         | 3.7 | 6          | 1170   | 215T  | 230/460        | 60          | 3        | 13.6/6.8     |
| Enclosure | IP  | Ins. Class | S.F.   | Duty  | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEAO      | 56  | F          | 1.15   | CONT  | 89.5           | B           |          | 40 C         |

| Load         | HP   | kW  | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|------|-----|---------|----------------|------------------|
| Full Load    | 5.00 | 3.7 | 6.8     | 90.4           | 76.2             |
| ¾ Load       | 3.75 | 2.8 | 5.5     | 90.1           | 70.9             |
| ½ Load       | 2.50 | 1.9 | 4.3     | 88.0           | 60.8             |
| ¼ Load       | 1.25 | 0.9 | 2.9     | 81.8           | 48.0             |
| No Load      |      |     | 3.4     |                | 5.0              |
| Locked Rotor |      |     | 50      |                | 42.7             |

| Torque            |                      |                 |                    | Rotor wk² Inertia (lb-ft²) |
|-------------------|----------------------|-----------------|--------------------|----------------------------|
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) |                            |
| 22.4              | 245                  | 185             | 300                | 1.32                       |

| Safe Stall Time(s) |     | Sound Pressure dB(A) @ 1M | Bearings* |          | Approx. Motor Weight (lbs) |
|--------------------|-----|---------------------------|-----------|----------|----------------------------|
| Cold               | Hot |                           | DE        | NDE      |                            |
| 35                 | 15  | -                         | 6308ZZC3  | 6308ZZC3 |                            |

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
Product Family:EQP Global Cooling Tower  
Mounting:Footed,Shaft:T Shaft

|             |  |
|-------------|--|
| Customer    |  |
| Customer PO |  |
| Sales Order |  |
| Project #   |  |

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**


|             |          |                  |             |             |               |
|-------------|----------|------------------|-------------|-------------|---------------|
| Engineering | spinzon  | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date  | 8/7/2024 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

**SPEED TORQUE/CURRENT CURVE**

Model: 0056FAGR41A-P

|                   |   |                   |                  |             |                |             |          |                |
|-------------------|---|-------------------|------------------|-------------|----------------|-------------|----------|----------------|
| HP                | kW  | Pole              | FL RPM           | Frame       | Voltage        | Hz          | Phase    | FL Amps        |
| 5                 | 3.7   | 6                 | 1170             | 215T        | 230/460        | 60          | 3        | 13.6/6.8       |
| Enclosure         | IP  | Ins. Class        | S.F.             | Duty        | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C)   |
| TEAO              | 56  | F                 | 1.15             | CONT        | 89.5           | B           |          | 40 C           |
| Locked Rotor Amps | Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> ) | Torque            |                  |             |                |             |          | Break Down (%) |
|                   |   | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) |                |             |          |                |
| 50                | 1.32  | 22.4              | 245              | 185         |                |             | 300      |                |

**Design Values**

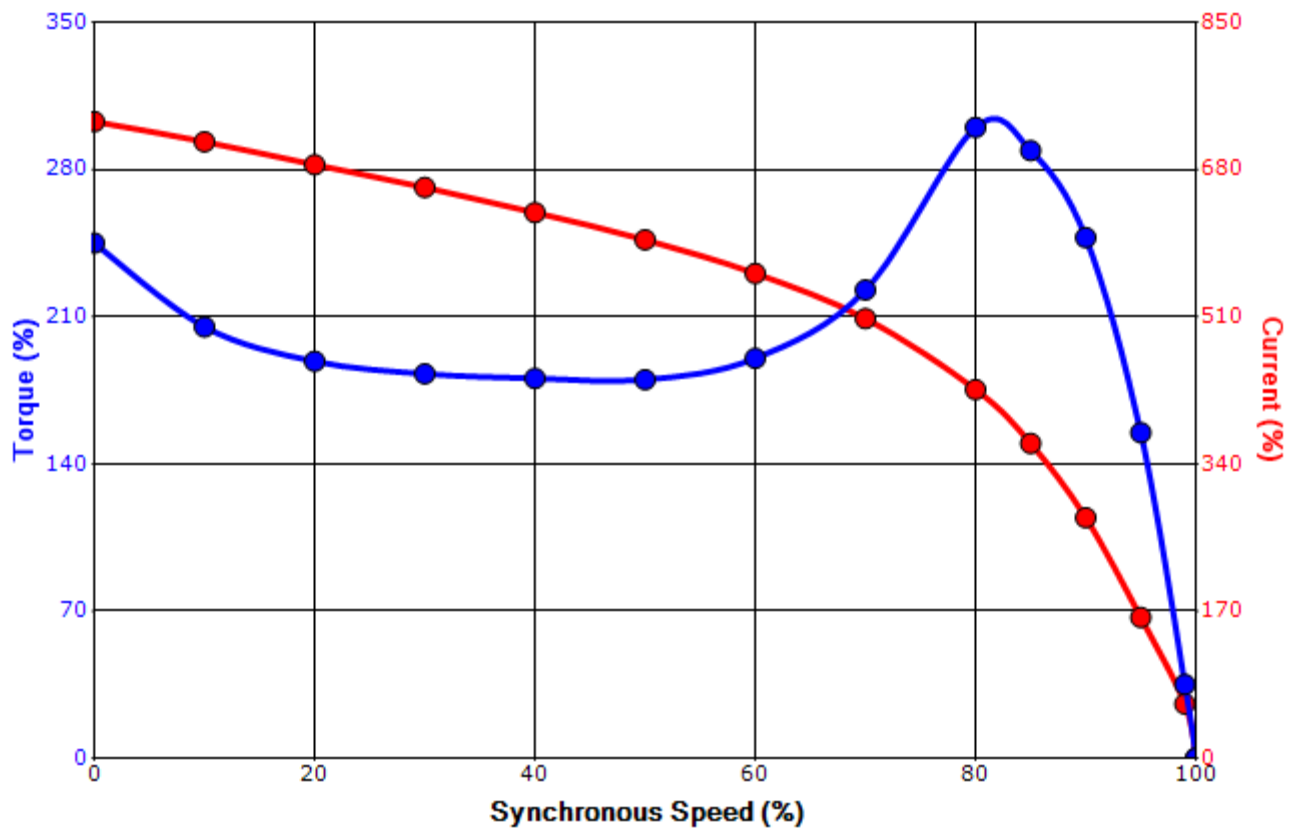

|             |  |  |     |
|-------------|--|--|-----|
| Customer    |  | wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> ) | -   |
| Customer PO |  | Load Type  | -   |
| Sales Order |  | Voltage (%)  | 100 |
| Project #   |  | Accel. Time  | -   |

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**

|             |          |                  |             |             |               |
|-------------|----------|------------------|-------------|-------------|---------------|
| Engineering | spinzon  | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date  | 8/7/2024 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

**Motor Connection Diagrams**  
12 Leads

Across-the-Line Starting / Running Connections

Low Voltage Delta



High Voltage Delta



Switch L1 and L2 to reverse rotation

Suitable for Wye-Delta Starting and Limited Part-Winding-Starting.  
Please Contact Toshiba International for specific connections.