

Unit:Metric [] reference dimension

TOSHIBA INTERNATIONAL CORPORATION

www.toshiba.com/tic

UNITS:	INCHES					NOTES:					
ROTATION	FROM NDE					1. MAIN	CONDUIT BO	X MAY]	BE ROTATED :	IN 90. IN	CREMENTS
						I	ARD PRODUCT L E ONLY BY CO		DIRECTIONAL FAI N CHANGE.	N. OPPOSITE	ROTATION
X ccw						3. KEY D	IMENSIONS E	QUAL (),	.375''X0.375''X2.875''	(MOTOR SU	UPPLIED WITH KEY
TOSHIBA	RESER'	VES THE RIGHT	TO MAKE CHANG	ES OF TECHNICAL	IMPROVEMENT AND TH	E DATA M	MAY CHANGE	WITHD	UT N□TICE	PREI	LIMINARY
DO NOT	USE FOR	R CONSTRUCTION,	INSTALLATION,	OR APPLICATION F	PURPOSES UNLESS THE	DRAWING	IS MARKED	AS CER	TIFIED	X CER	TIFIED
T 0 0		SEVERE DUTY		TOTALLY ENCI	LOSED FAN COOLED	DRAWIN	IG #: MDS	LV118-	-01		
	HH			HUBIZUNT	AL FOOT MOUNT	REV. D	ATF: 05/22	2/19 RI	F\/ #:00	PFR:	L.LIAN

F1 ASSEMBLY

REV. DESCRIP: FIRST ISSUE

3 PHASE INDUCTION MOTOR

254T-256T



Issued Date	12/12/2024	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0106QDAC41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
10	7.5	6	1170	256T	575	60	3	10.7
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.25	CONT	91.0	В	Н	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	10.00	7.5	10.7	91.2	76.4
¼ Load	7.50	5.6	8.6	90.6	71.4
∕₂ Load	5.00	3.7	6.8	88.5	61.6
4 Load	2.50	1.9	4.6	82.7	49.3
No Load			5.3		4.8
Locked Rotor			70		44.3

Torque									
Full Load	Locked Rotor	Pull Up	Break Down	Inertia					
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)					
44.9	295	185	345	2.65					

	Safe Stall Time(s) Cold Hot		Sound	Bearin	une*	Approx. Motor Weight	
			Pressure	Bealin	Approx. Motor Weight		
	Joid	dB(A) @		DE	NDE	(lbs)	
	30	15	-	6309ZZC3	6309ZZC3		

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:Quarry Mounting:Footed,Shaft:T Shaft Motor Specification:Quarry Duty

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.											
Engineering	zxie	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0						
Engr. Date	7/10/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011						




Issued Date	12/12/2024	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0106QDAC41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
10	7.5	6	1170	256T	575	60	3	10.7
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.25	CONT	91.0	В	Н	40 C
Locked Rotor	Rotor wk ²				Torque			
Amps	Inertia	Full Load	Locked	Rotor	Pull Up		Break	Down
Allips	(lb-ft²)	(lb-ft)	(%	b)	(%)		(%	6)
70	2.65	44.9	295		185		34	4 5

Design Values

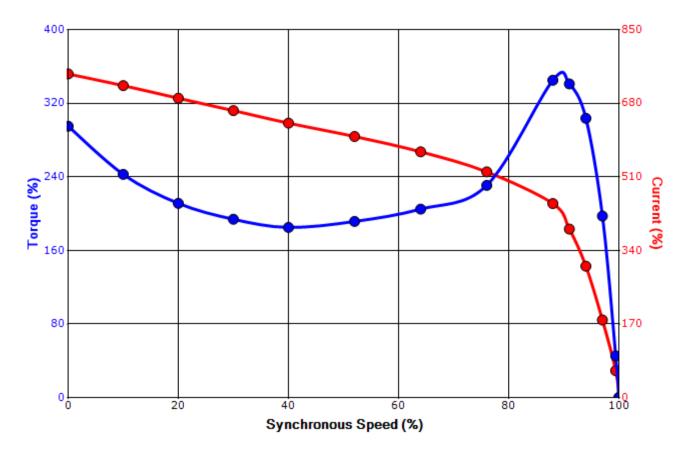




Customer	wk² Load Inertia (Ib-f	2) -
Customer PO	Load Typ	е -
Sales Order	Voltage (%	6) 100
Project #	Accel. Tim	е -


Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.											
Engineering	zxie	D. Suarez	Doc.# / Rev	MPCF-1121 / 0							
Engr. Date	7/10/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011						

Motor Connection Diagram 3 Leads - Delta Connection





Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable. If multiple cables represent a single lead, each one of them will be labeled with the appropriate lead number.

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 0



Issued Date:	12/12/2024	Transmit #:	
Issued By:	dschoeck	Issued Rev:	

SPARE PARTS LIST*

Model: 0106QDAC41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
10	7.5	6	1170	256T	575	60	3	10.7
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.25	CONT	91.0	В	Н	40 C

 Bearings DE
 6309ZZC3 / 45BC03JPP3OX

 Bearings NDE
 6309ZZC3 / 45BC03JPP3OX

*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.							
Engineering	zxie	Doc. Written By	D. Suarez	Doc.#/Rev	MPCF-1125 / 0		
Engr. Date	7/10/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011		