



Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

#### **TYPICAL MOTOR PERFORMANCE DATA**

Model: 1/26SDSR31H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
0.50	0.37	6	1170	56	230/460	60	3	1.8/0.9
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.25	CONT	80.0	-		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)	
Full Load	0.50	0.4	0.9	81.8	65.5	
¾ Load	0.37	0.3	0.7	79.8	56.8	
½ Load	0.25	0.2	0.7	74.6	44.9	
¼ Load	0.12	0.1	0.6	61.0	29.9	
No Load			0.6		10.9	
Locked Rotor			5.7		51.6	

Torque								
Full Load	Locked Rotor	Pull Up	Break Down	Inertia				
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)				
2.24	235	180	310	0.15				

Safe Stall	Safe Stall Time(s) Sound		Bearin	une*	Approx. Motor Weight	
Cold	Hot	Pressure	Dearings			
oolu	1100	dB(A) @ 1M	DE	NDE	(lbs)	
35	15		6305ZZ	6305ZZ	52	

\*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:56

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	SPinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0			
Engr. Date	6/23/2022	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			



Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

### **TYPICAL MOTOR PERFORMANCE DATA**

Model: 1/26SDSR31H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
0.50	0.37	6	960	56	190/380	50	3	2.0/1.0
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	78.5	-		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)		
Full Load	0.50	0.4	1.0	79.0	71.8		
¾ Load	0.38	0.3	0.8	78.6	63.9		
½ Load	0.25	0.2	0.7	75.0	51.6		
1/4 Load	0.13	0.1	0.6	62.7	34.3		
No Load			0.6		11.7		
Locked Rotor			5.2		56.5		

Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia			
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)			
2.74	190	145	255	0.15			

Safe Stall	Sound Bearings*		une*	Approx. Motor Weight		
Cold	Hot	Pressure	Dearings			
oolu	1100	dB(A) @ 1M	DE	NDE	(lbs)	
35	15		6305ZZ	6305ZZ	52	

\*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:56

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	SPinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0			
Engr. Date	6/23/2022	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date	ssued Date 6/19/2025		
Issued By	dschoeck	Issued Rev	

### SPEED TORQUE/CURRENT CURVE

Model: 1/26SDSR31H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps	
0.50	0.37	6	1170	56	230/460	60	3	1.8/0.9	
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)	
TEFC	55	F	1.25	CONT	80.0	-		40 C	
Locked Rotor	Rotor wk <sup>2</sup>		Torque						
Amps	Inertia	Full Load	Locked	Locked Rotor			Break Down		
Allips	(lb-ft²)	(lb-ft)	(%)		(%)		(%	<b>6</b> )	
5.7	0.15	2.24	235		180		3′	10	

# Design Values

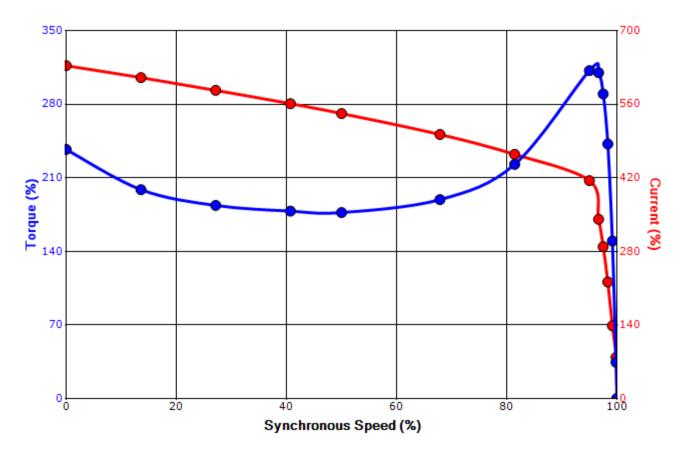



Customer	wk² Load Inertia (lb-ft²)	-
Customer PO	Load Type	-
Sales Order	Voltage (%)	100
Project #	Accel. Time	_

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	SPinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0			
Engr. Date	6/23/2022	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




<b>Issued Date</b> 6/19/2025		Transmit #	
Issued By	dschoeck	Issued Rev	

### SPEED TORQUE/CURRENT CURVE

Model: 1/26SDSR31H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps	
0.50	0.37	6	960	56	190/380	50	3	2.0/1.0	
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)	
TEFC	55	F	1.0	CONT	78.5	-		40 C	
Laskad Datas	Rotor wk <sup>2</sup>		Torque						
Locked Rotor Amps	Inertia	Full Load	Locked	Locked Rotor		)	Break	Down	
Allips	(lb-ft²)	(lb-ft)	(%)		(%)		(%	<b>6</b> )	
5.2	0.15	2.74	190		145		255		

# Design Values

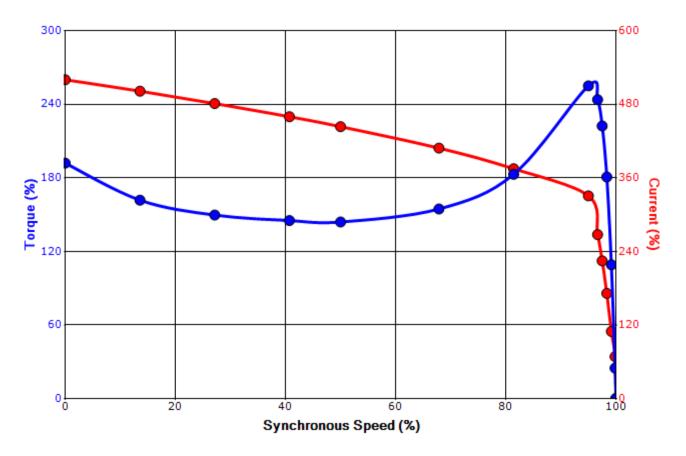




Customer	wk² Load Inertia (Ib-f	2) -
Customer PO	Load Typ	е -
Sales Order	Voltage (%	6) 100
Project #	Accel. Tim	е -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering SPinzon Doc. Written By D. Suarez Doc.# / Rev MPCF-1								
Engr. Date	6/23/2022	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			

# Motor Connection Diagrams 9 Leads

## Across-the-Line Starting / Running Connections

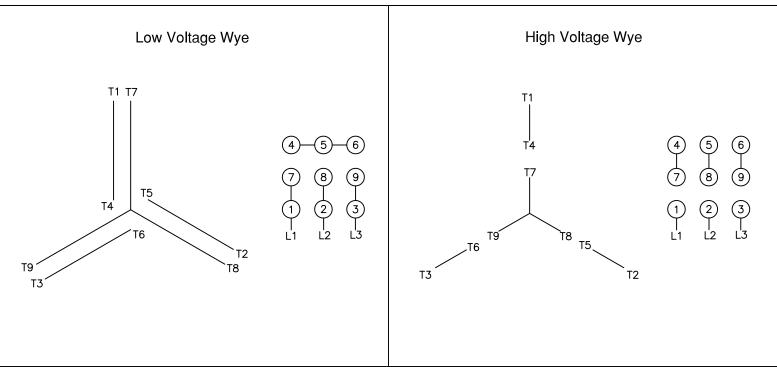

Switch L1 and L2 to reverse rotation

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 0



<b>Issued Date:</b> 6/19/2025		Transmit #:	
Issued By:	dschoeck	Issued Rev:	

#### **SPARE PARTS LIST\***

Model: 1/26SDSR31H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
0.50	0.37	6	1170	56	230/460	60	3	1.8/0.9
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.25	CONT	80.0	-		40 C

 Bearings DE
 6305ZZ / 25BC03JPPOX

 Bearings NDE
 6305ZZ / 25BC03JPPOX

\*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.							
Engineering	SPinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1125 / 0		
Engr. Date	6/23/2022	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011		