
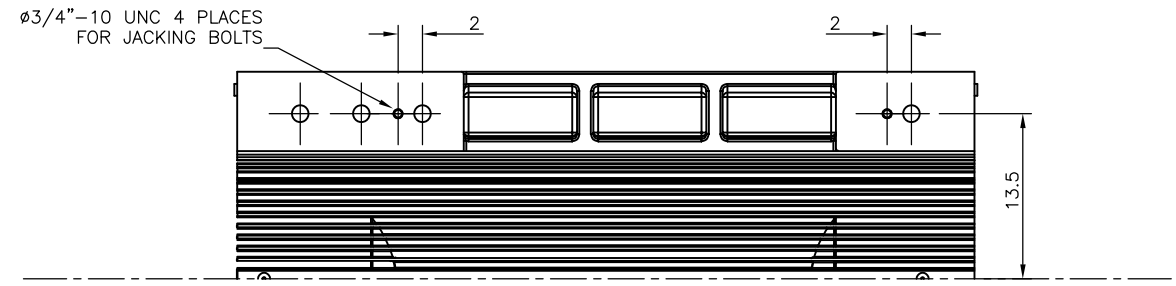


**TECHNICAL INFORMATION**

- 1. BEARING LUBRICATION DE: MOBILE POLIREX EM  
ODE: MOBILE POLIREX EM
- 2. BEARING TYPE DE: 6326C3  
ODE: 6326C3 INS
- 3. WINDING TEMP. DETECTORS  
NUMBER AND TYPE: 6xRTD(Pt0°C-100ohm)  
LOCATION: IN STATOR SLOT
- 4. BEARING TEMP. DETECTORS  
NUMBER AND TYPE: N/A
- 5. SPACE HEATER 1 PHASE  
VOLTS: 120 WATTS: 720
- 6. ROTATION: CCW VIEWED FROM NON DRIVE END  
THIS MOTOR IS BI DIRECTIONAL
- 7. MOTOR PAINT COLOR: GRAY
- 8. APPROX. WEIGHT: 12600 lbs
- 9. ACCESORIES:

**PRELIMINARY  
FOR QUOTATION ONLY  
DO NOT BUILD  
FROM THIS DRAWING**

TOSHIBA INTERNATIONAL CORPORATION  
RESERVES THE RIGHT TO MAKE TECHNICAL  
IMPROVEMENT AND DATA CHANGES WITHOUT NOTICE

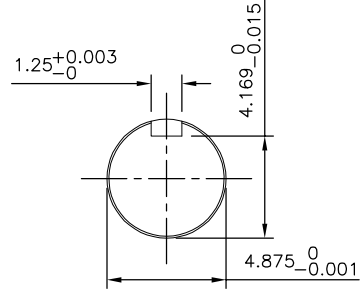

UNITS:IN

**DRAWING LIST**

MAIN TERMINAL BOX	
130P-7550-73	
AUX TERMINAL BOX FOR	
SPACE HEATER	130-7520-50
R.T.D.	130-7522-51
THERMISTOR	N/A
PRODUCTION #	N/A

0	FIRST ISSUE	SJ	6/20/14
NO.	REVISION	BY	DATE

**MOTOR OUTLINE FOR  
THREE PHASE INDUCTION MOTOR**

CUSTOMER NAME				P.O. NO.	MOTOR TAG NO.
OUTPUT HP	POLE	VOLTAGE V	FREQUENCY Hz	FULL LOAD SPEED (min <sup>-1</sup> )	TOSHIBA MODEL NO.
TYPE	FORM	INS. CLASS F	RATING CONT.	FRAME 6811US	S.F. ENCLOSURE TEFC

TOSHIBA INTERNATIONAL CORPORATION  
HOUSTON, TEXAS U.S.A.

3rd ANGLE PROJ.	PREPARED BY: S Johnson	DATE: 6/20/14	CHECKED BY:	DATE:	DRAWING NO.: MDSL0071-26	REV. 0
-----------------	---------------------------	------------------	-------------	-------	-----------------------------	-----------

**TYPICAL MOTOR PERFORMANCE DATA**

Model: 6008FTAL11E-C

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
600	447	8	895	6811US	4000	60	3	85
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	F	1.15	CONT	95.4	-		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	600.00	447.4	84	95.6	79.8
¾ Load	450.00	335.6	66	95.1	76.4
½ Load	300.00	223.7	50	93.7	67.9
¼ Load	150.00	111.9	33	89.6	53.8
No Load			36.2		2.8
Locked Rotor			532		15.4

Torque				Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> )
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	
3521	95	100	205	1311.19

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
88	51		6328C3	6326C3 INS	15000

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
Product Family:TEFC  
Mounting:Footed,Shaft:US Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**



Engineering	bammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	4/23/2015	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

**SPEED TORQUE/CURRENT CURVE**

Model: 6008FTAL11E-C

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
600	447	8	895	6811US	4000	60	3	85
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	F	1.15	CONT	95.4	-		40 C
Locked Rotor Amps	Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> )	Torque						Break Down (%)
		Full Load (lb-ft)	Locked Rotor (%)	Pull Up (%)				
532	1311.19	3521	95	100			205	

**Design Values**

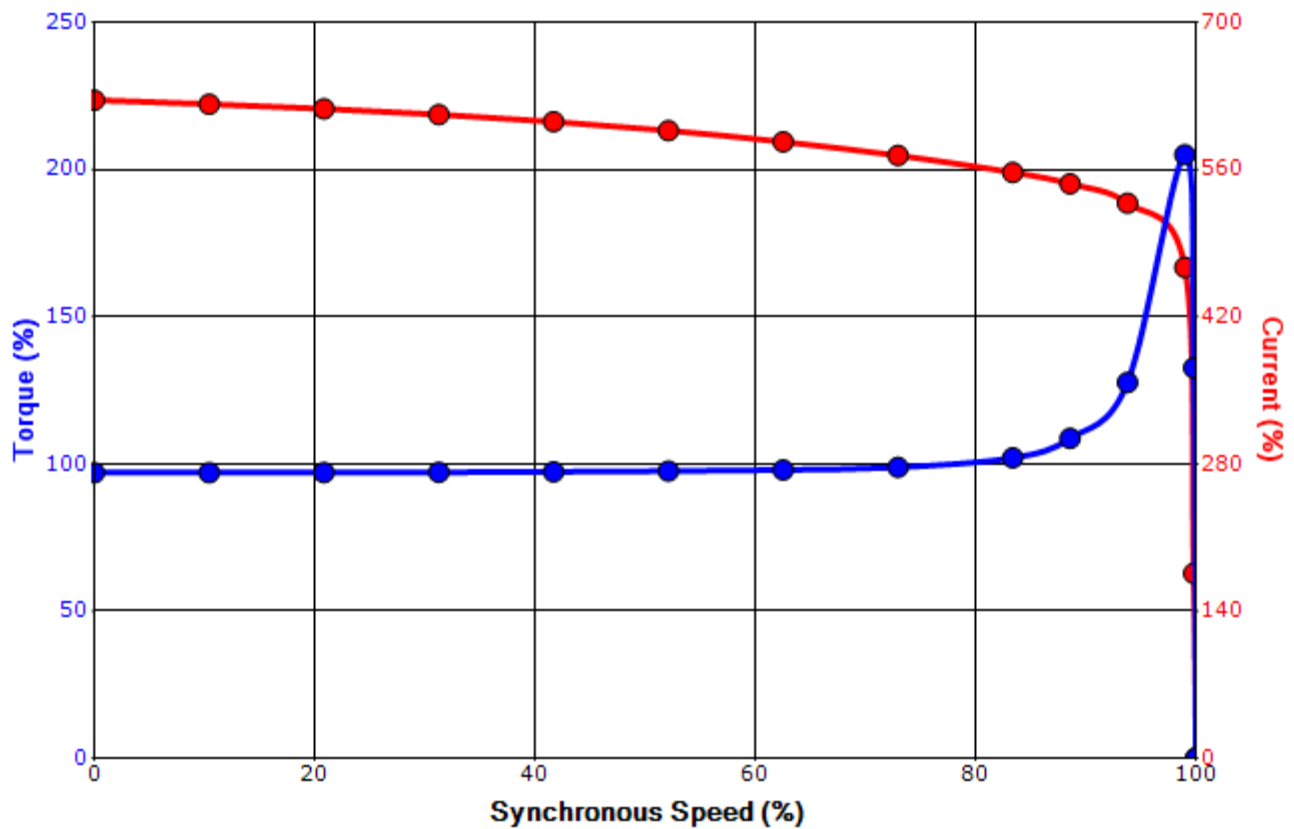

Customer		wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> )	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**

Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	4/23/2015	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

# Motor Connection Diagram

## 3 Leads - Wye Connection

### Single Voltage



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one of them will be labeled with the appropriate lead number.