



Issued Date	2/15/2024	Transmit #	
Issued By	dschoeck	Issued Rev	

#### **TYPICAL MOTOR PERFORMANCE DATA**

Model: Y754XPEA44A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
7.50	5.5	4	1760		230/460	60	3	19.6/9.8
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC		F	1.15	CONT	91.7	В		40 C

Load	HP	kW	Amperes	Amperes Efficiency (%)	
Full Load	7.50	5.6	9.8	91.8	79.9
¾ Load	5.63	4.2	7.8	90.9	75.3
∕₂ Load	3.75	2.8	6.3	88.5	65.8
4 Load	1.88	1.4	4.5	80.8	48.0
No Load			4.4		6.3
Locked Rotor			63		41.8

Torque						
Full Load	Full Load Locked Rotor Pull Up Break Down					
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)		
22.4	270	215	340	1.15		

Safe Stall Time(s)		Sound	Bearin	Approx. Motor Weight	
Cold	Hot	Pressure		Bearings*	
Colu	1100	dB(A) @ 1M	DE	NDE	(lbs)
35	15	-	6308UUC3	6308UUC3	

\*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global Explosion Proof

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.							
Engineering	mcampbell	mcampbell Doc. Written By D. Suarez Doc.# / Rev MF					
Engr. Date	2/9/2012	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011		




Issued Date	2/15/2024	Transmit #	
Issued By	dschoeck	Issued Rev	

## SPEED TORQUE/CURRENT CURVE

Model: Y754XPEA44A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
7.50	5.5	4	1760		230/460	60	3	19.6/9.8
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC		F	1.15	CONT	91.7	В		40 C
Laskad Datas	Rotor wk <sup>2</sup>	Torque						
Locked Rotor Amps	Inertia	Full Load	Locked Rotor		Pull Up	)	Break	Down
Allips	(lb-ft²)	(lb-ft)	(%	<b>6</b> )	(%)		(%	<b>%)</b>
63	1.15	22.4	270		215		34	40

## Design Values

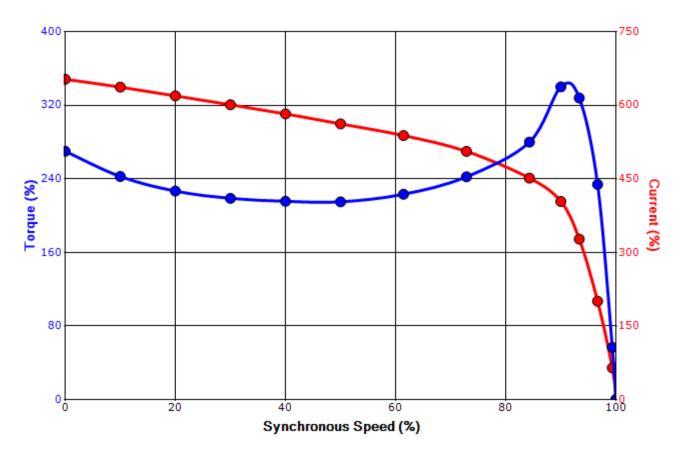



Customer	wk² Load Inertia (lb	ft²) -
Customer PO	Load T	/pe -
Sales Order	Voltage	<b>(%)</b> 100
Project #	Accel. T	me -

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.							
Engineering	mcampbell	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0		
Engr. Date	2/9/2012	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011		


# Motor Connection Diagrams <a href="mailto:12">12 Leads</a>

## Across-the-Line Starting / Running Connections

Low Voltage Delta



High Voltage Delta

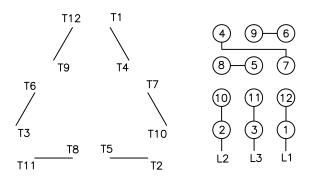

Switch L1 and L2 to reverse rotation

Suitable for Wye-Delta Starting and Limited Part-Winding-Starting. Please Contact Toshiba International for specific connections.

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 1