

www.toshiba.com/tic

3 PHASE

INDUCTION MOTOR

REV. DESCRIP; Remove dimension KEY

56C/56HC

foshiba international corporation



Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0012SDSR44H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1	0.75	2	3480	56C	230/460	60	3	2.8/1.4
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.25	CONT	77.0	-		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	1.00	0.7	1.4	84.2	79.0
¾ Load	0.75	0.6	1.1	82.7	71.4
½ Load	0.50	0.4	1.0	77.8	58.9
¼ Load	0.25	0.2	0.9	63.8	39.3
No Load			0.7		10.3
Locked Rotor			9.0		54.7

Torque								
Full Load	Locked Rotor	Pull Up	Break Down	Inertia				
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)				
1.51	225	170	335	0.04				

Safe Stall	Time(s)	Sound	Bearings*		Approx. Motor Weight	
Cold	Hot	Pressure				
Colu	HOU	dB(A) @ 1M	DE	NDE	(lbs)	
35	15		6305ZZ	6305ZZ	48	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:C-Face Round,Shaft:56

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	SPinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0			
Engr. Date	6/22/2022	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			



Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0012SDSR44H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
0.75	0.55	2	2890	56C	190/380	50	3	2.6/1.3
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	81.5	-		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)		
ull Load	0.75	0.6	1.3	81.9	78.4		
4 Load	0.56	0.4	1.1	80.1	70.7		
∕₂ Load	0.38	0.3	0.9	74.7	58.3		
4 Load	0.19	0.1	0.7	61.7	43.5		
lo Load			0.7		11.4		
Locked Rotor			8.0		58.7		

Torque						
Full Load	Locked Rotor	Pull Up	Break Down	Inertia		
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)		
1.36	235	180	335	0.04		

Safe Stall	Time(s)	Sound	Bearings*		Approx. Motor Weight	
Cold	Hot	Pressure				
Colu	HOU	dB(A) @ 1M	DE	NDE	(lbs)	
35	15		6305ZZ	6305ZZ	48	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:C-Face Round,Shaft:56

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	SPinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0			
Engr. Date	6/22/2022	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0012SDSR44H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps	
1	0.75	2	3480	56C	230/460	60	3	2.8/1.4	
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)	
TEFC	55	F	1.25	CONT	77.0	-		40 C	
Locked Rotor	Rotor wk ²		Torque						
Amps	Inertia	Full Load	Locked	Rotor	Pull Up		Break Down		
Allips	(lb-ft²)	(lb-ft)	(%)		(%)		(%	%)	
9.0	0.04	1.51	22	225		170		335	

Design Values

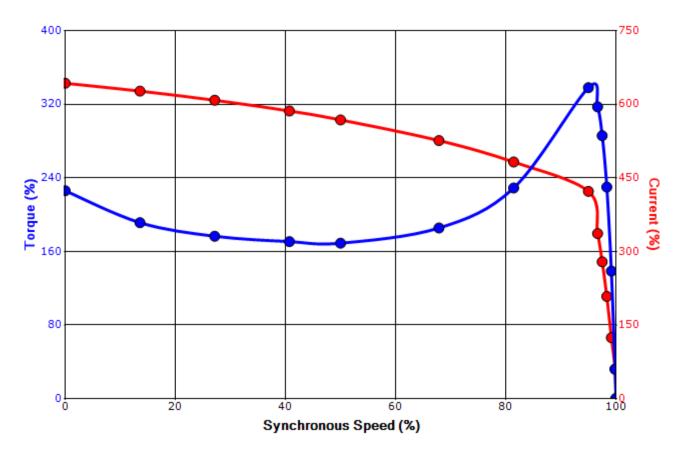



Customer	wk² Load Inertia (lb-ft²)	-
Customer PO	Load Type	-
Sales Order	Voltage (%)	100
Project #	Accel. Time	_

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	SPinzon	D. Suarez	Doc.# / Rev	MPCF-1121 / 0				
Engr. Date	6/22/2022	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0012SDSR44H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
0.75	0.55	2	2890	56C	190/380	50	3	2.6/1.3
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	81.5	-		40 C
Locked Rotor	Rotor wk ²		Torque					
Amps	Inertia	Full Load	Locked	Rotor	Pull Up		Break Down	
Amps	(lb-ft²)	(lb-ft)	(%)		(%)		(%	%)
8.0	0.04	1.36	23	235		180		35

Design Values

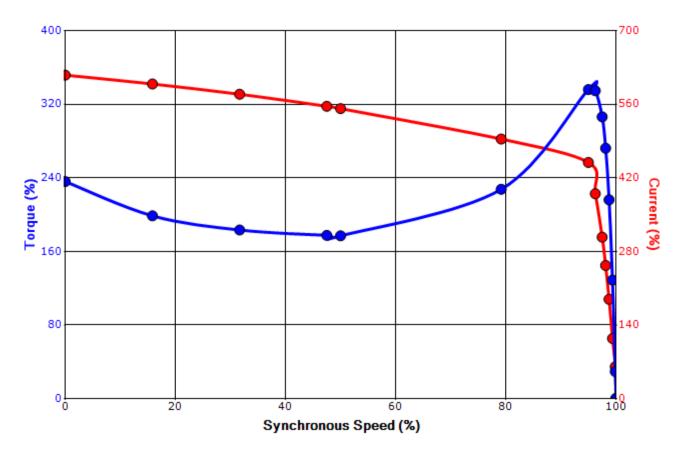




Customer	wk² Load Inertia (Ib-f	2) -
Customer PO	Load Typ	е -
Sales Order	Voltage (%	6) 100
Project #	Accel. Tim	е -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering SPinzon Doc. Written By D. Suarez Doc								
Engr. Date	6/22/2022	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			

Motor Connection Diagrams 9 Leads

Across-the-Line Starting / Running Connections

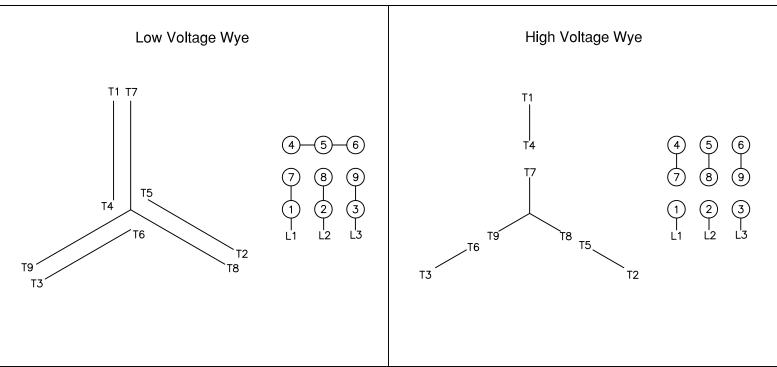

Switch L1 and L2 to reverse rotation

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 0



Issued Date:	6/19/2025	Transmit #:	
Issued By:	dschoeck	Issued Rev:	

SPARE PARTS LIST*

Model: 0012SDSR44H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1	0.75	2	3480	56C	230/460	60	3	2.8/1.4
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.25	CONT	77.0	-		40 C

 Bearings DE
 6305ZZ / 25BC03JPPOX

 Bearings NDE
 6305ZZ / 25BC03JPPOX

*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.							
Engineering	SPinzon	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1125 / 0		
Engr. Date	6/22/2022	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011		