


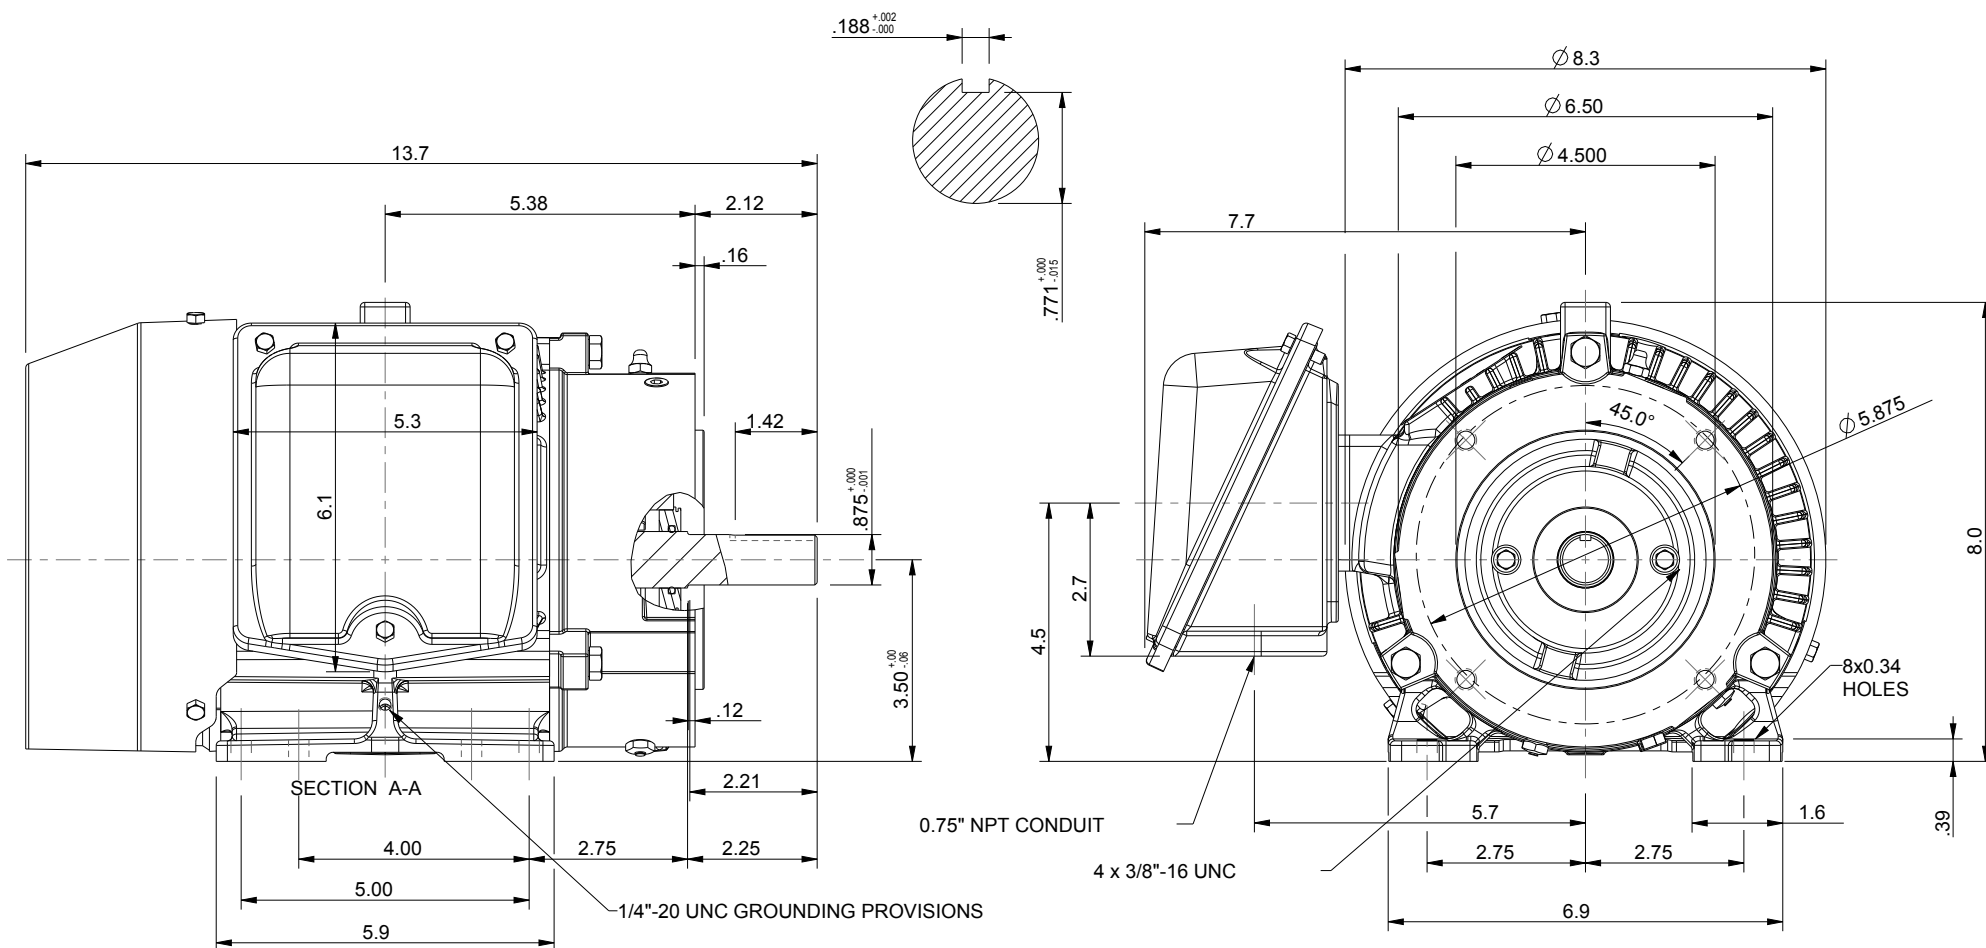

|                                                                                                                          |                                                                                                                        |                                                                                                                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UNITS: INCHES                                                                                                            |                                                                                                                        | NOTES:<br>1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS<br>2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.<br>3. KEY DIMENSIONS EQUAL 0.188"x 0.188"x 1.38" (MOTOR SUPPLIED WITH KEY) |
| ROTATION FROM NDE                                                                                                        |                                                                                                                        |                                                                                                                                                                                                                                                  |
| <div><div></div><div>X CCW</div></div> | <div><div></div><div>CW</div></div> |                                                                                                                                                                                                                                                  |

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE ☐ PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED ☒ CERTIFIED

## TYPICAL MOTOR PERFORMANCE DATA

Model: 0022XDSB47A-P

| HP        | kW  | Pole       | FL RPM | Frame | Voltage        | Hz          | Phase    | FL Amps      |
|-----------|-----|------------|--------|-------|----------------|-------------|----------|--------------|
| 2         | 1.5 | 2          | 3500   | 145TC | 460            | 60          | 3        | 2.7          |
| Enclosure | IP  | Ins. Class | S.F.   | Duty  | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC      | 56  | F          | 1.15   | CONT  | 85.5           | B           |          | 40 C         |

| Load         | HP   | kW  | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|------|-----|---------|----------------|------------------|
| Full Load    | 2.00 | 1.5 | 2.7     | 85.6           | 82.1             |
| ¾ Load       | 1.50 | 1.1 | 2.2     | 84.3           | 74.9             |
| ½ Load       | 1.00 | 0.7 | 1.7     | 80.8           | 66.5             |
| ¼ Load       | 0.50 | 0.4 | 1.0     | 75.6           | 60.6             |
| No Load      |      |     | 1.3     |                |                  |
| Locked Rotor |      |     | 25      |                |                  |

| Torque            |                      |                 |                    | Rotor wk² Inertia (lb-ft²) |
|-------------------|----------------------|-----------------|--------------------|----------------------------|
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) |                            |
| 3.00              | 325                  | 265             | 375                | 0.06                       |

| Safe Stall Time(s) |     | Sound Pressure dB(A) @ 1M | Bearings* |        | Approx. Motor Weight (lbs) |
|--------------------|-----|---------------------------|-----------|--------|----------------------------|
| Cold               | Hot |                           | DE        | NDE    |                            |
| 24                 | 15  | -                         | 6305C3    | 6305C3 | 71                         |

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
Product Family:EQP Global 841 CFace Footed  
Mounting:C-Face Footed,Shaft:T Shaft

|             |  |
|-------------|--|
| Customer    |  |
| Customer PO |  |
| Sales Order |  |
| Project #   |  |

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**


|             |           |                  |             |             |               |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | zxie      | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date  | 8/19/2025 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

## SPEED TORQUE/CURRENT CURVE

Model: 0022XDSB47A-P

| HP                | kW                                                  | Pole              | FL RPM           | Frame       | Voltage        | Hz             | Phase    | FL Amps      |
|-------------------|-----------------------------------------------------|-------------------|------------------|-------------|----------------|----------------|----------|--------------|
| 2                 | 1.5                                                 | 2                 | 3500             | 145TC       | 460            | 60             | 3        | 2.7          |
| Enclosure         | IP                                                  | Ins. Class        | S.F.             | Duty        | NEMA Nom. Eff. | NEMA Design    | kVA Code | Ambient (°C) |
| TEFC              | 56                                                  | F                 | 1.15             | CONT        | 85.5           | B              |          | 40 C         |
| Locked Rotor Amps | Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> ) | Torque            |                  |             |                |                |          |              |
|                   |                                                     | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) |                | Break Down (%) |          |              |
| 25                | 0.06                                                | 3.00              | 325              | 265         |                | 375            |          |              |

### Design Values

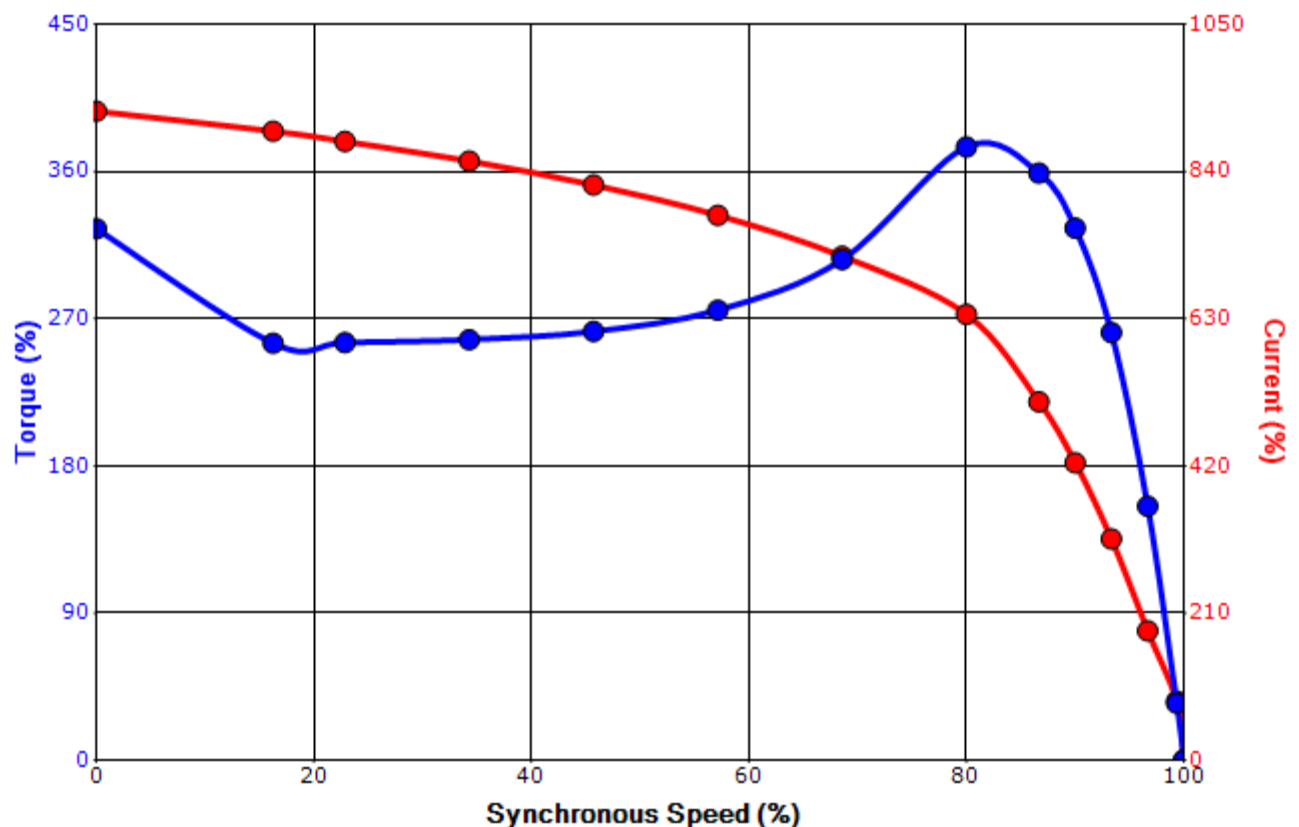

|             |  |                                                    |     |
|-------------|--|----------------------------------------------------|-----|
| Customer    |  | wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> ) | -   |
| Customer PO |  | Load Type                                          | -   |
| Sales Order |  | Voltage (%)                                        | 100 |
| Project #   |  | Accel. Time                                        | -   |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

|             |           |                  |             |             |               |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | zxie      | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date  | 8/19/2025 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

# Motor Connection Diagram

## 3 Leads - Wye Connection

### Single Voltage



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one  
of them will be labeled with the appropriate lead number.