



Issued Date 6/20/2025		Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0024FAGR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	4	1750	145T	230/460	60	3	5.6/2.8
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEAO	56	F	1.15	CONT	86.5	В		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	2.00	1.5	2.8	87.1	75.8
¾ Load	1.50	1.1	2.3	86.8	69.8
½ Load	1.00	0.7	1.9	84.4	58.4
¼ Load	0.50	0.4	1.3	77.4	44.6
No Load			11.6		1.9
Locked Rotor			22		53.7

Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia			
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)			
6.00	270	205	335	0.15			

Safe Stall	Time(s)	Sound	Bearin	Approx. Motor Weight		
Cold	Hot Pressure		Bearings*		Approx. Motor Weight	
Colu	Hot	dB(A) @ 1M	DE	NDE	(lbs)	
32	27	-	6305ZZC3	6305ZZC3	57	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global Cooling Tower Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

	TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0				
Engr. Date	6/17/2025	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011				



Issued Date	6/20/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0024FAGR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	4	1430	145T	190/380	50	3	6.6/3.3
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEAO	56	F	1.0	CONT	83.5	-		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	2.00	1.5	3.3	83.7	82.7
¾ Load	1.50	1.1	2.5	85.2	78.2
½ Load	1.00	0.7	1.9	84.3	68.1
¼ Load	0.50	0.4	1.3	79.4	55.0
No Load			1.4		8.5
Locked Rotor			34		71.4

Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia			
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)			
7.35	215	165	235	0.15			

Safe Stall	Time(s)	Sound	Bearin	Approx. Motor Weight	
Cold	Hot	Pressure	Bearings*		
Colu	Hot	dB(A) @ 1M	DE	NDE	(lbs)
32	22	-	6305ZZC3	6305ZZC3	57

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global Cooling Tower Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0			
Engr. Date	6/17/2025	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date 6/20/2025		Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0024FAGR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	4	1750	145T	230/460	60	3	5.6/2.8
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEAO	56	F	1.15	CONT	86.5	В		40 C
Locked Rotor	Rotor wk ²				Torque			
Amps	Inertia	Full Load	Locked Rotor		Pull Up		Break Down	
Allips	(lb-ft²)	(lb-ft)	(%)		(%)		(%	%)
22	0.15	6.00	270		205		33	35

Design Values

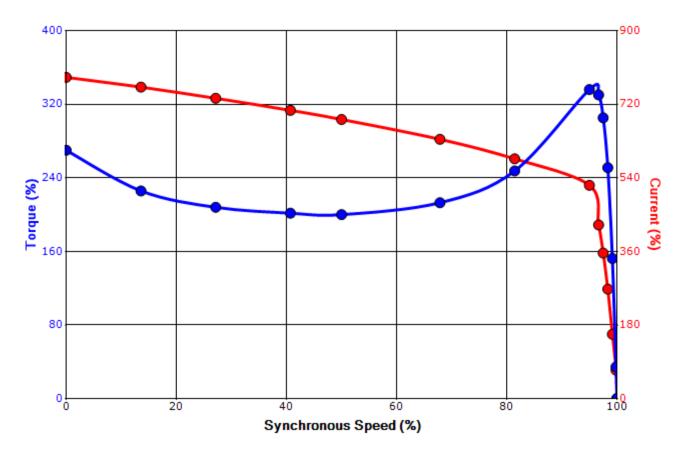



Customer	wk² Load Inertia (lb-ft²)	-
Customer PO	Load Type	-
Sales Order	Voltage (%)	100
Project #	Accel. Time	_

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.									
Engineering bmammen Doc. Written By D. Suarez Doc.# / Rev MPCF-									
Engr. Date	6/17/2025	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011				




Issued Date 6/20/2025		Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0024FAGR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	4	1430	145T	190/380	50	3	6.6/3.3
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEAO	56	F	1.0	CONT	83.5	-		40 C
Looked Boton	Rotor wk ²				Torque			
Amps	ocked Rotor Inertia Full Load Locked Rotor		Rotor	Pull Up		Break Down		
Amps	(lb-ft²)	(lb-ft)	(%)		(%)		(%	%)
34	0.15	7.35	215		165		23	35

Design Values

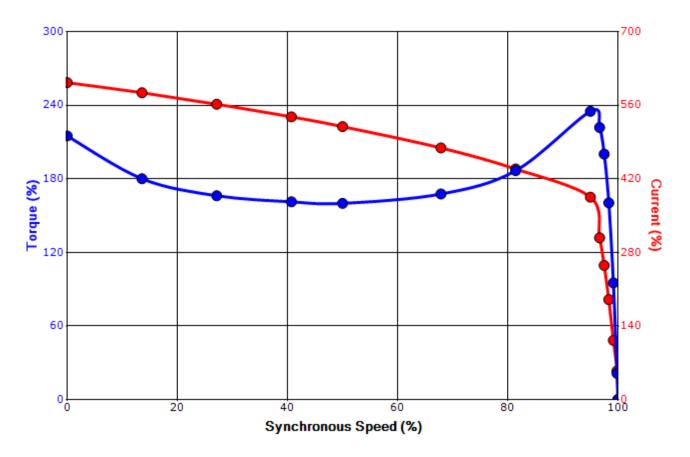




Customer	wk² Load Inertia (Ib-f	2) -
Customer PO	Load Typ	е -
Sales Order	Voltage (%	6) 100
Project #	Accel. Tim	е -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.									
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.#/Rev	MPCF-1121 / 0				
Engr. Date	6/17/2025	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011				

Motor Connection Diagrams 9 Leads

Across-the-Line Starting / Running Connections

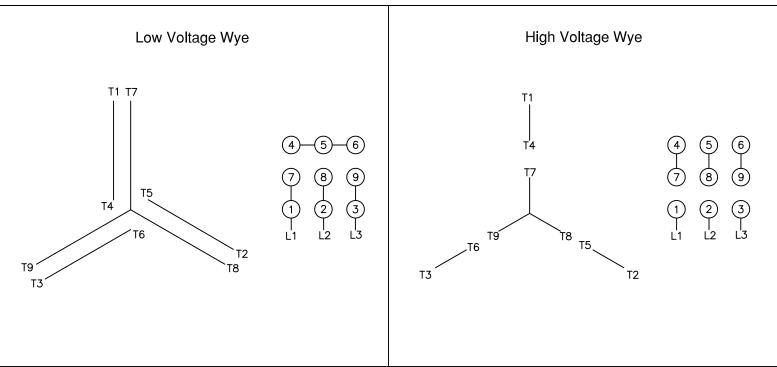

Switch L1 and L2 to reverse rotation

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 0



Issued Date:	6/20/2025	Transmit #:	
Issued By:	dschoeck	Issued Rev:	

SPARE PARTS LIST*

Model: 0024FAGR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	4	1750	145T	230/460	60	3	5.6/2.8
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEAO	56	F	1.15	CONT	86.5	В		40 C

 Bearings DE
 6305ZZC3 / 25BC03JPP3OA

 Bearings NDE
 6305ZZC3 / 25BC03JPP3OA

*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.							
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1125 / 0		
Engr. Date	6/17/2025	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011		