



Issued Date 6/19/2025		Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0024SDSR42H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	4	1750	56C	230/460	60	3	5.8/2.9
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	86.5	В		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)	
Full Load	2.00	1.5	2.9	86.9	75.2	
¾ Load	1.50	1.1	2.3	86.5	68.9	
½ Load	1.00	0.7	1.9	83.9	57.0	
¼ Load	0.50	0.4	1.4	76.7	42.3	
No Load			1.6		7.2	
Locked Rotor			22		52.3	

Torque								
Full Load	Locked Rotor	Pull Up	Break Down	Inertia				
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)				
6.00	255	195	345	0.15				

Safe Stall	Safe Stall Time(s) Cold Hot		Bearin	une*	Approx. Motor Weight	
Cold			Bearings*		Approx. Motor Weight	
oolu	1100	dB(A) @ 1M	DE	NDE	(lbs)	
35	15		6305ZZ	6305ZZ	58	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:C-Face Footed,Shaft:56

Customer	,	
Customer PO	,	
Sales Order		
Project #	,	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.									
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0				
Engr. Date	7/24/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011				



Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0024SDSR42H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1.50	1.1	4	1450	56C	190/380	50	3	5.4/2.7
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	84.2	В		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	1.50	1.1	2.7	85.2	74.3
¼ Load	1.12	8.0	2.2	84.8	67.5
∕₂ Load	0.75	0.6	1.8	81.9	55.2
∕₄ Load	0.37	0.3	1.4	74.0	40.4
No Load			1.5		7.6
Locked Rotor			19.4		57.5

Torque								
Full Load	Locked Rotor	Pull Up	Break Down	Inertia				
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)				
5.43	280	215	355	0.15				

Safe Stall	Safe Stall Time(s) Cold Hot		Bearin	une*	Approx. Motor Weight
Cold			Bearings*		Approx. Motor Weight
oolu	1100	dB(A) @ 1M	DE	NDE	(lbs)
35	15		6305ZZ	6305ZZ	58

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:C-Face Footed,Shaft:56

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	Engineering bmammen Doc. Written By D. Suarez Doc.#/Rev MP							
Engr. Date	7/24/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0024SDSR42H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	4	1750	56C	230/460	60	3	5.8/2.9
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	86.5	В		40 C
Looked Deter	Rotor wk ²				Torque			
Locked Rotor Amps	Inertia	Full Load	Locked	Rotor	Pull Up		Break Down	
Amps	(lb-ft²)	(lb-ft)	(%	(%)			(%	%)
22	0.15	6.00	25	255		195		45

Design Values

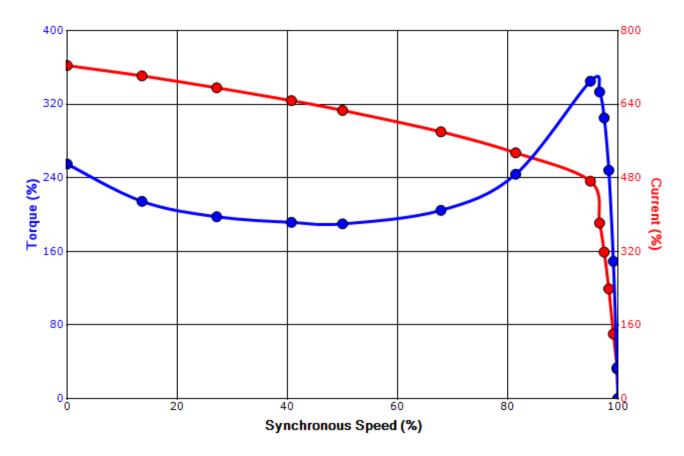



Customer	wk² Load Inertia (Ib-f	2) -
Customer PO	Load Typ	е -
Sales Order	Voltage (%	6) 100
Project #	Accel. Tim	е -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.									
Engineering bmammen Doc. Written By D. Suarez Doc.# / Rev MPCF-112									
Engr. Date	7/24/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011				




Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0024SDSR42H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1.50	1.1	4	1450	56C	190/380	50	3	5.4/2.7
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	84.2	В		40 C
Laskad Datas	Rotor wk ²		Torque					
Locked Rotor Amps	Inertia	Inertia Full Load Locked Rotor Pull Up)	Break	Down		
Allips	(Ib-ft²)	(lb-ft)	(%	(%)			(%	%)
19.4	0.15	5.43	28	280			3	55

Design Values

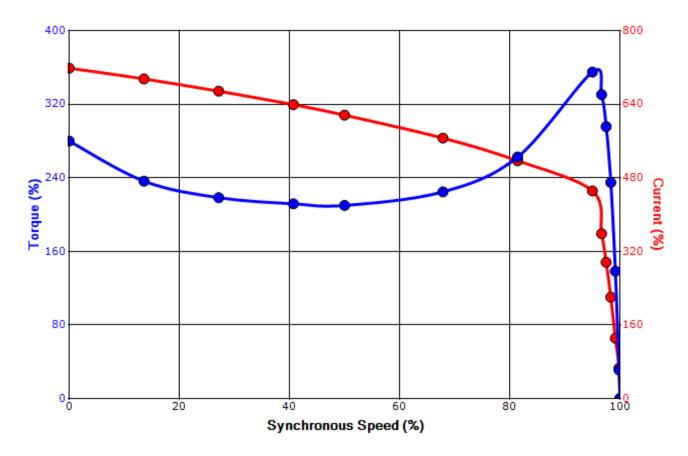




Customer	wk² Load Inertia (Ib-f	2) -
Customer PO	Load Typ	е -
Sales Order	Voltage (%	6) 100
Project #	Accel. Tim	е -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.									
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0				
Engr. Date	7/24/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011				

Motor Connection Diagrams 9 Leads

Across-the-Line Starting / Running Connections

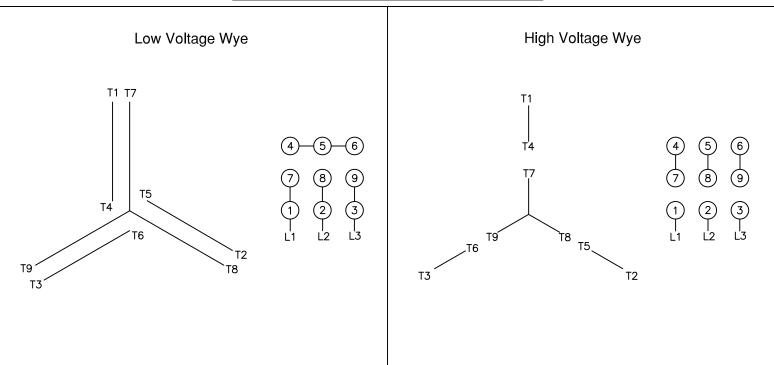

Switch L1 and L2 to reverse rotation

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 0



Issued Date:	6/19/2025	Transmit #:	
Issued By:	dschoeck	Issued Rev:	

SPARE PARTS LIST*

Model: 0024SDSR42H-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
2	1.5	4	1750	56C	230/460	60	3	5.8/2.9
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	86.5	В		40 C

 Bearings DE
 6305ZZ / 25BC03JPPOX

 Bearings NDE
 6305ZZ / 25BC03JPPOX

*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.						
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1125 / 0	
Engr. Date	7/24/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011	