


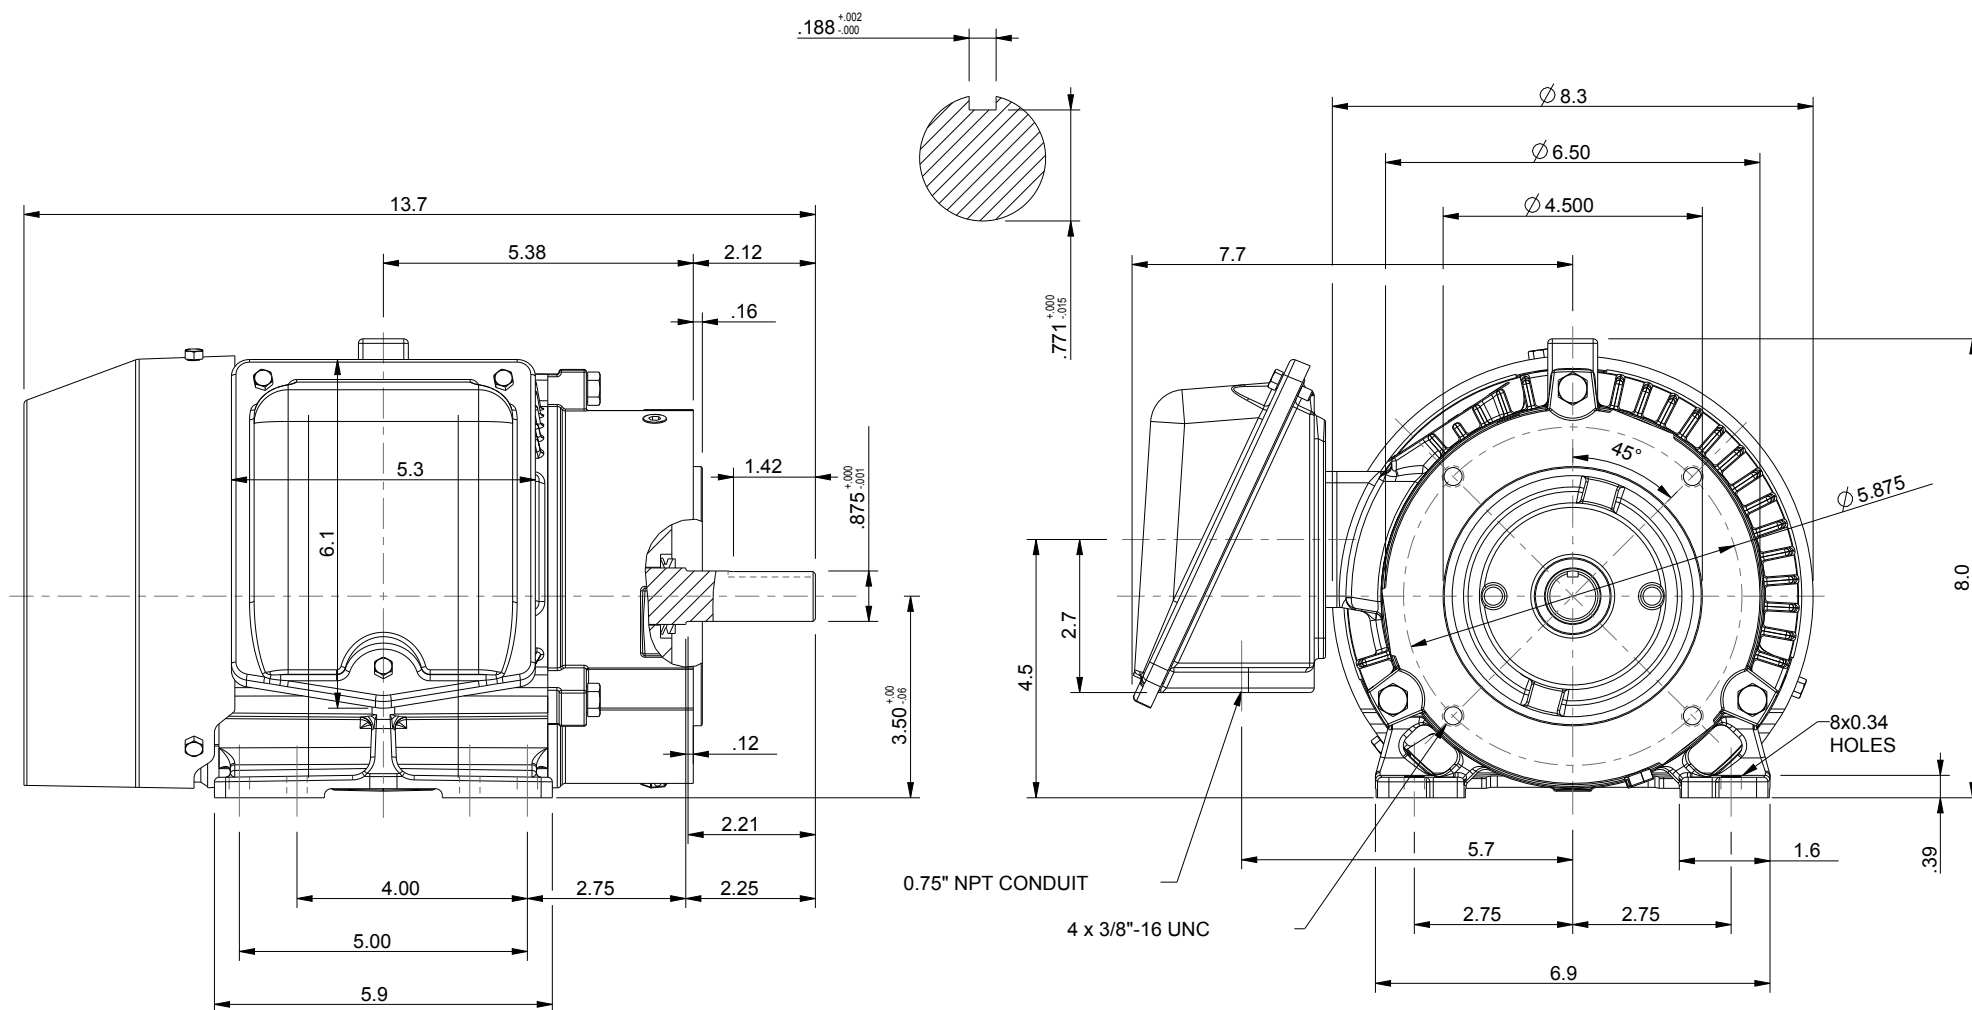

|                                                                               |                                                                               |                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UNITS: INCHES                                                                 |                                                                               | <div>NOTES:</div> <div>1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS</div> <div>2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.</div> <div>3. KEY DIMENSIONS EQUAL 0.188"x 0.188"x 1.38" (MOTOR SUPPLIED WITH KEY)</div> |
| ROTATION FROM NDE                                                             |                                                                               |                                                                                                                                                                                                                                                                                     |
| <div><div><div></div><div></div></div><div><div></div><div></div></div></div> | <div><div><div></div><div></div></div><div><div></div><div></div></div></div> |                                                                                                                                                                                                                                                                                     |

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE

☐ PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED

☒ CERTIFIED

## TYPICAL MOTOR PERFORMANCE DATA

Model: 0024XSSC47A-P

| HP        | kW  | Pole       | FL RPM | Frame | Voltage        | Hz          | Phase    | FL Amps      |
|-----------|-----|------------|--------|-------|----------------|-------------|----------|--------------|
| 2         | 1.5 | 4          | 1750   | 145TC | 575            | 60          | 3        | 2.3          |
| Enclosure | IP  | Ins. Class | S.F.   | Duty  | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC      | 55  | F          | 1.15   | CONT  | 86.5           | B           |          | 40 C         |

| Load         | HP   | kW  | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|------|-----|---------|----------------|------------------|
| Full Load    | 2.00 | 1.5 | 2.3     | 87.1           | 74.3             |
| ¾ Load       | 1.50 | 1.1 | 1.9     | 86.6           | 68.0             |
| ½ Load       | 1.00 | 0.7 | 1.5     | 84.0           | 56.0             |
| ¼ Load       | 0.50 | 0.4 | 1.1     | 76.6           | 41.3             |
| No Load      |      |     | 10.1    |                |                  |
| Locked Rotor |      |     | 18.4    |                |                  |

| Torque            |                      |                 |                    | Rotor wk² Inertia (lb-ft²) |
|-------------------|----------------------|-----------------|--------------------|----------------------------|
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) |                            |
| 6.00              | 305                  | 225             | 350                | 0.15                       |

| Safe Stall Time(s) |     | Sound Pressure dB(A) @ 1M | Bearings* |          | Approx. Motor Weight (lbs) |
|--------------------|-----|---------------------------|-----------|----------|----------------------------|
| Cold               | Hot |                           | DE        | NDE      |                            |
| 31                 | 24  | -                         | 6305ZZC3  | 6305ZZC3 | 68                         |

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
Product Family:EQP Global 840 CFace Footed  
Mounting:C-Face Footed,Shaft:T Shaft

|             |  |
|-------------|--|
| Customer    |  |
| Customer PO |  |
| Sales Order |  |
| Project #   |  |

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**


|             |           |                  |             |             |               |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | bammen    | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date  | 6/23/2025 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

## SPEED TORQUE/CURRENT CURVE

Model: 0024XSSC47A-P

| HP                | kW                                                  | Pole              | FL RPM           | Frame       | Voltage        | Hz             | Phase    | FL Amps      |
|-------------------|-----------------------------------------------------|-------------------|------------------|-------------|----------------|----------------|----------|--------------|
| 2                 | 1.5                                                 | 4                 | 1750             | 145TC       | 575            | 60             | 3        | 2.3          |
| Enclosure         | IP                                                  | Ins. Class        | S.F.             | Duty        | NEMA Nom. Eff. | NEMA Design    | kVA Code | Ambient (°C) |
| TEFC              | 55                                                  | F                 | 1.15             | CONT        | 86.5           | B              |          | 40 C         |
| Locked Rotor Amps | Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> ) | Torque            |                  |             |                |                |          |              |
|                   |                                                     | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) |                | Break Down (%) |          |              |
| 18.4              | 0.15                                                | 6.00              | 305              | 225         |                | 350            |          |              |

### Design Values

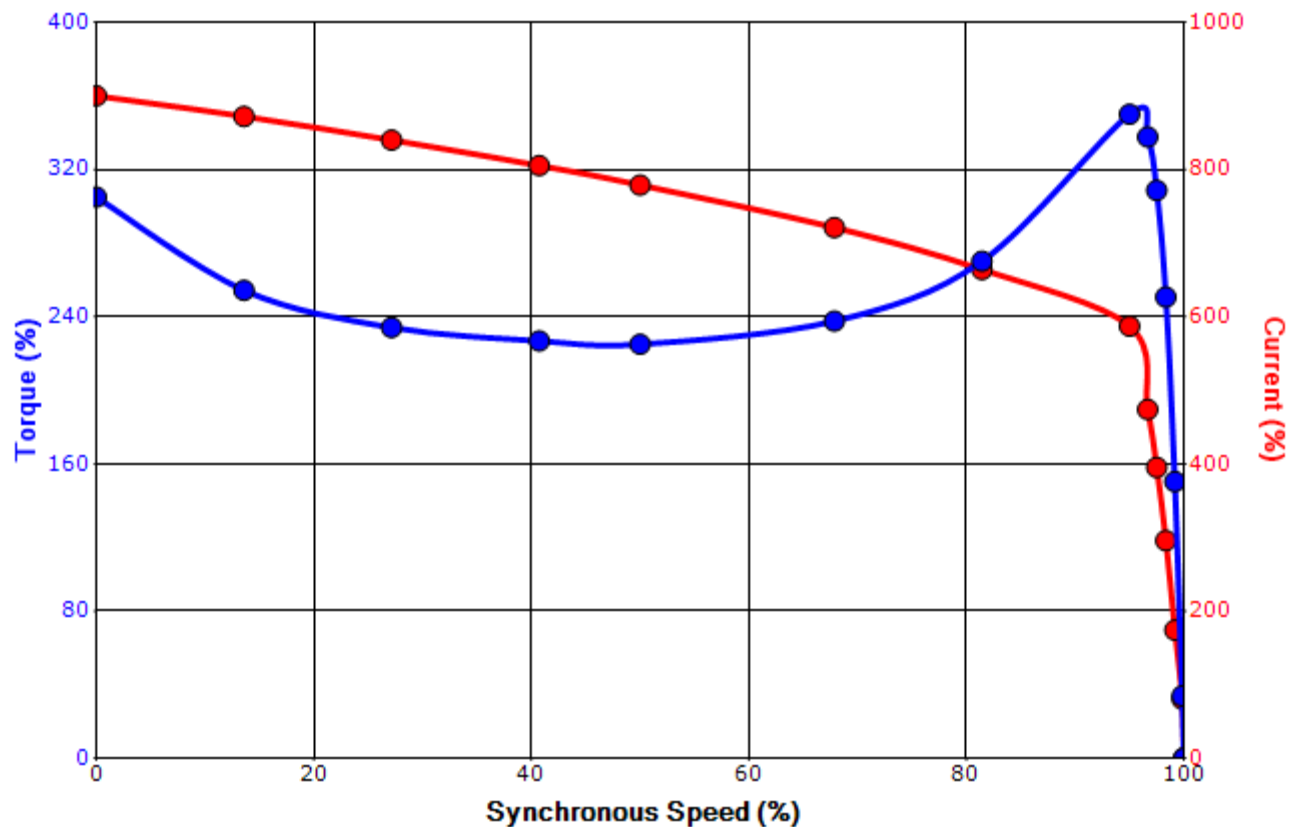

|             |  |  |                                                    |     |
|-------------|--|--|----------------------------------------------------|-----|
| Customer    |  |  | wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> ) | -   |
| Customer PO |  |  | Load Type                                          | -   |
| Sales Order |  |  | Voltage (%)                                        | 100 |
| Project #   |  |  | Accel. Time                                        | -   |

Tag:

All characteristics are average expected values.


TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

|             |           |                  |             |             |               |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | bmammen   | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date  | 6/23/2025 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

# Motor Connection Diagram

## 3 Leads - Wye Connection

### Single Voltage

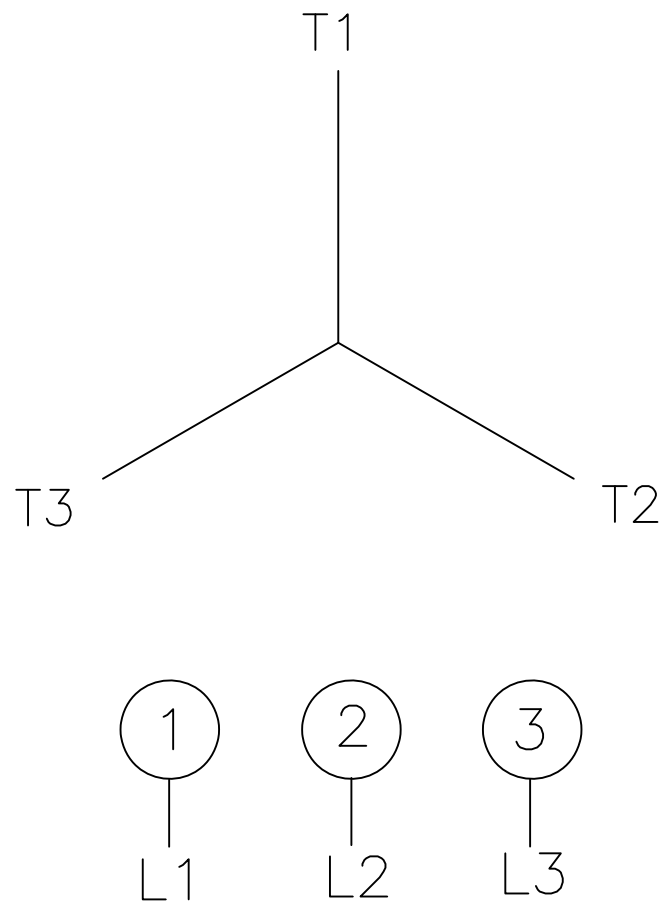

Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one of them will be labeled with the appropriate lead number.