

NOTES:

- 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
- 2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
- 3. KEY DIMENSIONS EQUAL

0.625"x 0.625"x 4.25"

(MOTOR SUPPLIED WITH KEY)

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE

PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED

X CERTIFIED



TOTALLY ENCLOSED FAN COOLED
HORIZONTAL FOOT MOUNTED
3 PHASE INDUCTION MOTOR
364T-365T F1 ASSEMBLY

DRAWING #: MDSLV001-07

REV. DATE: 07/11/18 REV. #: 2 PER.: M. O'DOWD

REV. DESCRIP.:



Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0406SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
40	30	6	1180	364T	230/460	60	3	96/48
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	94.1	В		40 C

Load HP kW		Amperes	Efficiency (%)	Power Factor (%)	
Full Load	40.00	29.8	47	94.4	82.8
¾ Load	30.00	22.4	37	94.2	79.4
½ Load	20.00	14.9	28	92.9	71.5
√₄ Load	10.00	7.5	18.7	88.4	56.5
No Load		17.6		3.9	
Locked Rotor			315		34.9

	Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia				
(lb-ft)	(% FLT)	(lb-ft²)						
178	215	135	275	17.67				

Safe Stall	all Time(s) Sound		Bearin	Bearings*		
Cold	Hot	Pressure	Dearings		Approx. Motor Weight	
oolu	1100	dB(A) @ 1M	DE	NDE	(lbs)	
35	15	-	6314ZC3	6312ZC3	728	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	zxie	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0			
Engr. Date	7/15/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			



Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: 0406SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
40	30	6	975	364T	190/380	50	3	114/57
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	91.7	В		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	40.00	29.8	56	92.6	86.0
¾ Load	30.00	22.4	43	93.1	84.0
½ Load	20.00	14.9	31	92.4	77.7
1/4 Load	10.00	7.5	21	88.7	59.2
No Load			15.3		4.8
Locked Rotor			315		34.3

Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia			
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)			
215	160	115	220	17.67			

Safe Stall	all Time(s) Sound		Bearin	Approx. Motor Weight		
Cold	Hot	Hot Pressure	Bearing		Approx. Motor Weight	
oolu	1100	dB(A) @ 1M	DE	NDE	(lbs)	
35	15	-	6314ZC3	6312ZC3	728	

*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	
Tag:	

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	zxie	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0			
Engr. Date	7/15/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date	ssued Date 6/19/2025		
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0406SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps	
40	30	6	1180	364T	230/460	60	3	96/48	
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)	
TEFC	55	F	1.15	CONT	94.1	В		40 C	
Looked Deter	Rotor wk ²	Torque							
Locked Rotor Amps	Inertia	Full Load	Locked	Locked Rotor		Pull Up		Break Down	
Allips	(lb-ft²)	(lb-ft)	(%)		(%)		(%	6)	
315	17.67	178	215		135		27	75	

Design Values

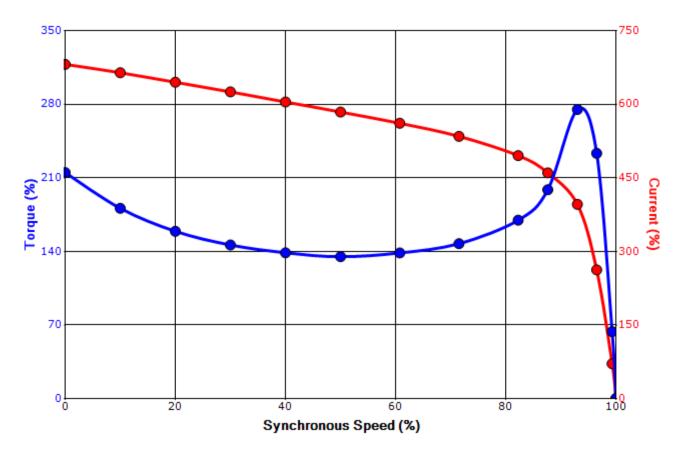



Customer	wk² Load Inertia (Ib-f	2) -
Customer PO	Load Typ	е -
Sales Order	Voltage (%	6) 100
Project #	Accel. Tim	е -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering zxie Doc. Written By D. Suarez Doc.#/Rev MPCF-1								
Engr. Date	7/15/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date	ssued Date 6/19/2025		
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: 0406SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps	
40	30	6	975	364T	190/380	50	3	114/57	
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)	
TEFC	55	F	1.0	CONT	91.7	В		40 C	
Laskad Datas	Rotor wk ²	Torque							
Locked Rotor Amps	Inertia	Full Load	Locked	Locked Rotor		Pull Up		Break Down	
Amps	(lb-ft²)	(lb-ft)	(%)		(%)		(%	%)	
315	17.67	215	160		115		22	20	

Design Values

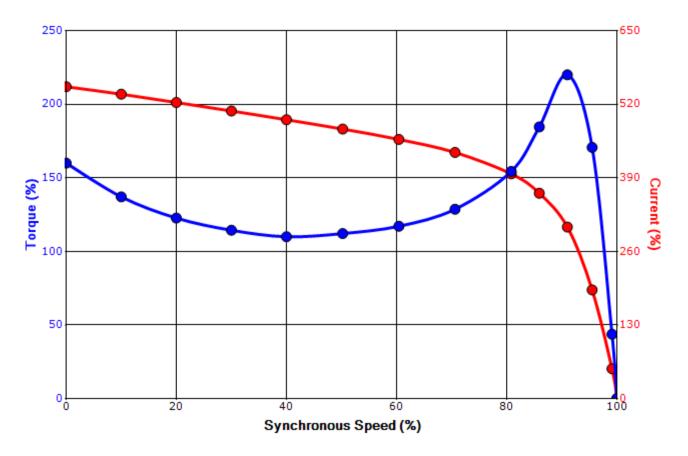



Customer	wk² Load Inertia (Ib-f	2) -
Customer PO	Load Typ	е -
Sales Order	Voltage (%	6) 100
Project #	Accel. Tim	е -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	zxie	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0			
Engr. Date	7/15/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			

Motor Connection Diagrams 12 Leads

Across-the-Line Starting / Running Connections

Low Voltage Delta



High Voltage Delta



Switch L1 and L2 to reverse rotation

Suitable for Wye-Delta Starting and Limited Part-Winding-Starting. Please Contact Toshiba International for specific connections.

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 1



Issued Date: 6/19/2025		Transmit #:	
Issued By:	dschoeck	Issued Rev:	

SPARE PARTS LIST*

Model: 0406SDSR41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
40	30	6	1180	364T	230/460	60	3	96/48
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	94.1	В		40 C

 Bearings DE
 6314ZC3 / 70BC03JP3OX

 Bearings NDE
 6312ZC3 / 60BC03JP3OX

*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.							
Engineering	zxie	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1125 / 0		
Engr. Date	7/15/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011		