
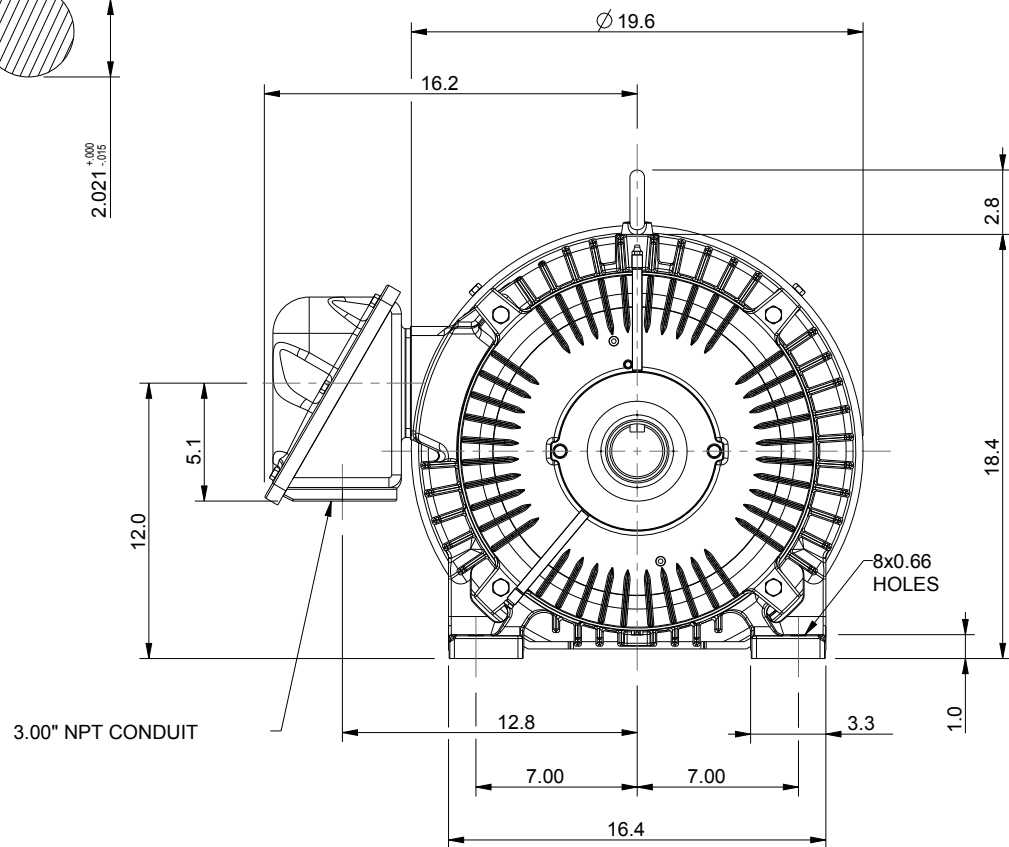


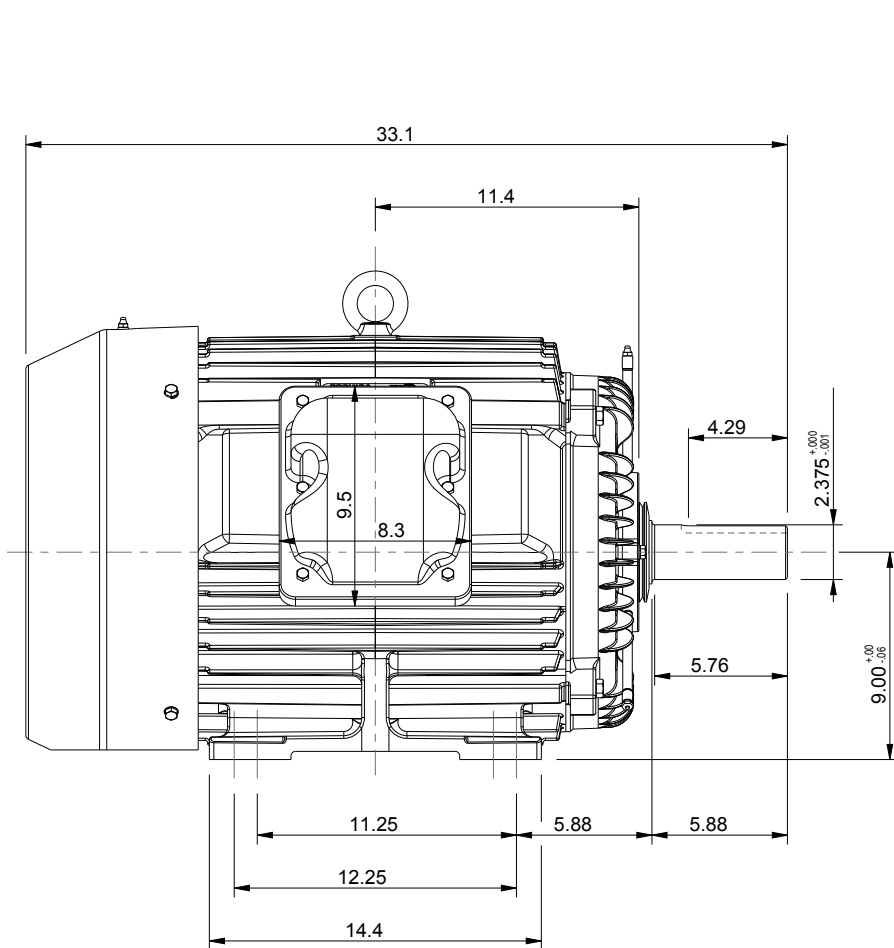

|                                                             |                                                           |                                                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UNITS: INCHES                                               |                                                           | <div>NOTES:</div> <div>1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS</div> <div>2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.</div> <div>3. KEY DIMENSIONS EQUAL 0.625"x 0.625"x 4.25" (MOTOR SUPPLIED WITH KEY)</div> |
| ROTATION FROM NDE                                           |                                                           |                                                                                                                                                                                                                                                                                     |
| <div><div><div></div></div><div><div>X</div>CCW</div></div> | <div><div><div></div></div><div><div></div>CW</div></div> |                                                                                                                                                                                                                                                                                     |

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE ☐ PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED ☒ CERTIFIED

## TYPICAL MOTOR PERFORMANCE DATA

Model: 0506XSSC41A-P

| HP        | kW | Pole       | FL RPM | Frame | Voltage        | Hz          | Phase    | FL Amps      |
|-----------|----|------------|--------|-------|----------------|-------------|----------|--------------|
| 50        | 37 | 6          | 1180   | 365T  | 575            | 60          | 3        | 47           |
| Enclosure | IP | Ins. Class | S.F.   | Duty  | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC      | 55 | F          | 1.15   | CONT  | 94.1           | B           |          | 40 C         |

| Load         | HP    | kW   | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|-------|------|---------|----------------|------------------|
| Full Load    | 50.00 | 37.3 | 47      | 94.6           | 83.5             |
| ¾ Load       | 37.50 | 28.0 | 36      | 94.6           | 80.5             |
| ½ Load       | 25.00 | 18.6 | 27      | 93.5           | 73.0             |
| ¼ Load       | 12.50 | 9.3  | 16.5    | 90.4           | 62.5             |
| No Load      |       |      | 16.6    |                |                  |
| Locked Rotor |       |      | 315     |                |                  |

| Torque            |                      |                 |                    | Rotor wk² Inertia (lb-ft²) |
|-------------------|----------------------|-----------------|--------------------|----------------------------|
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) |                            |
| 223               | 210                  | 135             | 265                | 20.06                      |

| Safe Stall Time(s) |     | Sound Pressure dB(A) @ 1M | Bearings* |        | Approx. Motor Weight (lbs) |
|--------------------|-----|---------------------------|-----------|--------|----------------------------|
| Cold               | Hot |                           | DE        | NDE    |                            |
| 32                 | 15  | -                         | 6314C3    | 6312C3 | 812                        |

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
Product Family:EQP Global 840  
Mounting:Footed,Shaft:T Shaft

|             |  |
|-------------|--|
| Customer    |  |
| Customer PO |  |
| Sales Order |  |
| Project #   |  |

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**


|             |           |                  |             |             |               |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | zxie      | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date  | 7/15/2024 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

## SPEED TORQUE/CURRENT CURVE

Model: 0506XSSC41A-P

| HP                | kW                                                  | Pole              | FL RPM           | Frame       | Voltage        | Hz             | Phase    | FL Amps      |
|-------------------|-----------------------------------------------------|-------------------|------------------|-------------|----------------|----------------|----------|--------------|
| 50                | 37                                                  | 6                 | 1180             | 365T        | 575            | 60             | 3        | 47           |
| Enclosure         | IP                                                  | Ins. Class        | S.F.             | Duty        | NEMA Nom. Eff. | NEMA Design    | kVA Code | Ambient (°C) |
| TEFC              | 55                                                  | F                 | 1.15             | CONT        | 94.1           | B              |          | 40 C         |
| Locked Rotor Amps | Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> ) | Torque            |                  |             |                |                |          |              |
|                   |                                                     | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) |                | Break Down (%) |          |              |
| 315               | 20.06                                               | 223               | 210              | 135         |                | 265            |          |              |

### Design Values

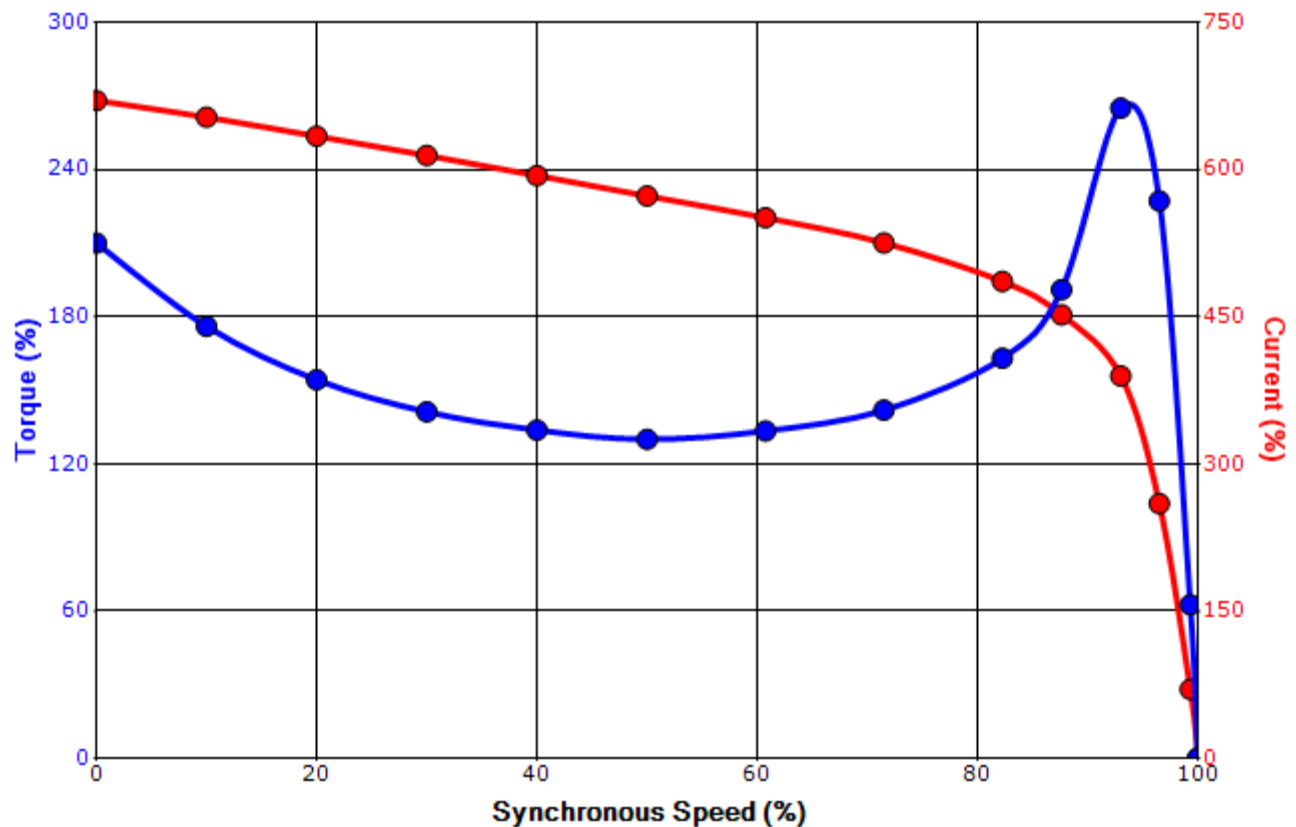

|             |  |                                                    |     |
|-------------|--|----------------------------------------------------|-----|
| Customer    |  | wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> ) | -   |
| Customer PO |  | Load Type                                          | -   |
| Sales Order |  | Voltage (%)                                        | 100 |
| Project #   |  | Accel. Time                                        | -   |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

|             |           |                  |             |             |               |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | zxie      | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date  | 7/15/2024 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

### Motor Connection Diagram

#### 3 Leads - Delta Connection



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one  
of them will be labeled with the appropriate lead number.