

UNITS: INCHES ROTATION FROM NDE X CCW CW

#### NOTES:

- 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
- 2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
- 3. KEY DIMENSIONS EQUAL

0.500"x 0.500"x 2.00"

(MOTOR SUPPLIED WITH KEY)

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE

**PRELIMINARY** 

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED

X CERTIFIED



TOTALLY ENCLOSED FAN COOLED HORIZONTAL FOOT MOUNTED 3 PHASE INDUCTION MOTOR 364TS-365TS

DRAWING #: MDSLV002-07

REV. DATE: 07/11/18

REV. #: 2 PER.: M. O'DOWD REV. DESCRIP.:

F1 ASSEMBLY



Issued Date	Issued Date 6/19/2025		
Issued By	dschoeck	Issued Rev	

### **TYPICAL MOTOR PERFORMANCE DATA**

Model: 0604SDSR41B-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
60	45	4	1775	364TS	230/460	60	3	136/68
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	95.0	В		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	60.00	44.7	67	95.3	87.1
¾ Load	45.00	33.6	52	94.8	85.2
∕₂ Load	30.00	22.4	37	93.2	79.4
∕₄ Load	15.00	11.2	26	87.9	61.0
No Load			19.5		4.9
Locked Rotor			473		26.5

Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia			
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)			
178	175	125	270	16.80			

Safe Stall	Time(s)	Sound	Bearin	Approx. Motor Weight	
Cold	Cold Hot Pressure		Bearing	Approx. Motor Weight	
Join	1100	dB(A) @ 1M	DE	NDE	(lbs)
35	15	-	6312ZC3	6312ZC3	814

\*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:TS Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	Jrodrigu	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0			
Engr. Date	7/25/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			



Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

### **TYPICAL MOTOR PERFORMANCE DATA**

Model: 0604SDSR41B-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
60	45	4	1470	364TS	190/380	50	3	164/82
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	93.1	В		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)	
Full Load	60.00	44.7	82	94.1	87.9	
¾ Load	45.00	33.6	62	94.0	87.2	
½ Load	30.00	22.4	43	93.0	83.3	
¼ Load	15.00	11.2	28	88.7	67.9	
No Load			17.6		4.9	
Locked Rotor			516		26.8	

Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia			
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)			
214	145	105	230	16.80			

Safe Stall	Time(s)	Sound	Bearin	Approx. Motor Weight	
Cold	Cold Hot Pressure		Bearing	Approx. Motor Weight	
Join	1100	dB(A) @ 1M	DE	NDE	(lbs)
35	15	-	6312ZC3	6312ZC3	814

\*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global SD Mounting:Footed,Shaft:TS Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.									
Engineering	Jrodrigu	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0				
Engr. Date	8/1/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011				




<b>Issued Date</b> 6/19/2025		Transmit #	
Issued By	dschoeck	Issued Rev	

# SPEED TORQUE/CURRENT CURVE

Model: 0604SDSR41B-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps	
60	45	4	1775	364TS	230/460	60	3	136/68	
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)	
TEFC	55	F	1.15	CONT	95.0	В		40 C	
Locked Rotor	Rotor wk <sup>2</sup>	Torque							
Amps	Inertia	Full Load	Locked	Locked Rotor		Pull Up		Break Down	
Allips	(lb-ft²)	(lb-ft)	(%	(%)		(%)		<b>6</b> )	
473	16.80	178	175		125		270		

# Design Values

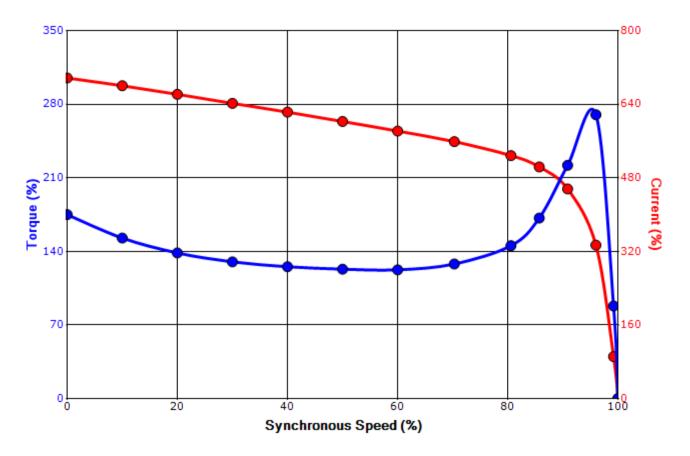



Customer	wk² Load Inertia (Ib-f	2) -				
Customer PO	Load Typ	е -				
Sales Order	Voltage (%	6) 100				
Project #	Accel. Tim	е -				

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.									
Engineering	Jrodrigu	Doc. Written By	D. Suarez	Doc.#/Rev	MPCF-1121 / 0				
Engr. Date	7/25/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011				




Issued Date	6/19/2025	Transmit #	
Issued By	dschoeck	Issued Rev	

# SPEED TORQUE/CURRENT CURVE

Model: 0604SDSR41B-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps	
60	45	4	1470	364TS	190/380	50	3	164/82	
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)	
TEFC	55	F	1.0	CONT	93.1	В		40 C	
Looked Deter	Rotor wk <sup>2</sup>	Torque							
Locked Rotor Amps	Inertia	Full Load	Locked	Locked Rotor		Pull Up		Break Down	
Allips	(lb-ft²)	(lb-ft)	(%	(%)			(%	<b>%)</b>	
516	16.80	214	145		105		230		

# Design Values

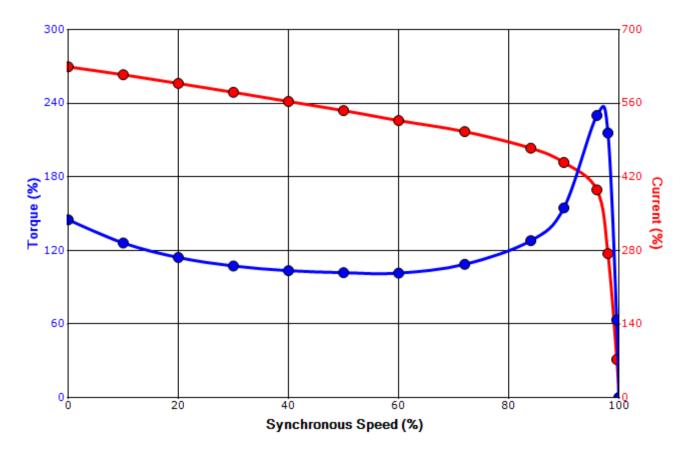



Customer	wk² Load Inertia (Ib-f	2) -				
Customer PO	Load Typ	е -				
Sales Order	Voltage (%	6) 100				
Project #	Accel. Tim	е -				

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.									
Engineering	Jrodrigu	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0				
Engr. Date	8/1/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011				

# Motor Connection Diagrams <a href="mailto:12">12 Leads</a>

## Across-the-Line Starting / Running Connections

Low Voltage Delta



High Voltage Delta



Switch L1 and L2 to reverse rotation

Suitable for Wye-Delta Starting and Limited Part-Winding-Starting. Please Contact Toshiba International for specific connections.

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 1



Issued Date:	6/19/2025	Transmit #:	
Issued By:	dschoeck	Issued Rev:	

#### **SPARE PARTS LIST\***

Model: 0604SDSR41B-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
60	45	4	1775	364TS	230/460	60	3	136/68
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	95.0	В		40 C

 Bearings DE
 6312ZC3 / 60BC03JP3OX

 Bearings NDE
 6312ZC3 / 60BC03JP3OX

\*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.							
Engineering	Jrodrigu	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1125 / 0		
Engr. Date	7/25/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011		