



Issued Date	12/19/2024	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: Y154SDGC41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1.50	1.1	4	1755	145T	575	60	3	1.8
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	56	F	1.15	CONT	86.5	В		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	1.50	1.1	1.8	86.5	70.4
¼ Load	1.12	0.8	1.5	85.0	62.7
∕₂ Load	0.75	0.6	1.2	81.7	54.1
∕₄ Load	0.37	0.3	1.1	70.7	36.2
No Load			1.1		7.7
Locked Rotor			15.6		51.2

Torque						
Full Load	Full Load Locked Rotor Pull Up Break Down					
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)		
4.49	275	205	385	0.13		

Safe Stall Time(s)		Sound	Rearin	une*	Approx. Motor Weight	
Cold	Hot	Pressure	Bearings*			
		dB(A) @ 1M	DE	NDE	(lbs)	
30	25	-	6305ZZC3	6305ZZC3 6305ZZC3		

*Bearings are the only recommended spare part(s).

Motor Options: Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	bmammen	Doc. Written By	D. Suarez	Doc.#/Rev	MPCF-1119 / 0			
Engr. Date	7/17/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			




Issued Date	12/19/2024	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: Y154SDGC41A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1.50	1.1	4	1755	145T	575	60	3	1.8
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	56	F	1.15	CONT	86.5	В		40 C
Looked Deter	Rotor wk ²		Torque					
Locked Rotor Amps	Inertia	Full Load	Locked	Rotor	Pull Up		Break	Down
Amps	(lb-ft²)	(lb-ft)	(%	(%)			(%	6)
15.6	0.13	4.49	275		205		38	35

Design Values

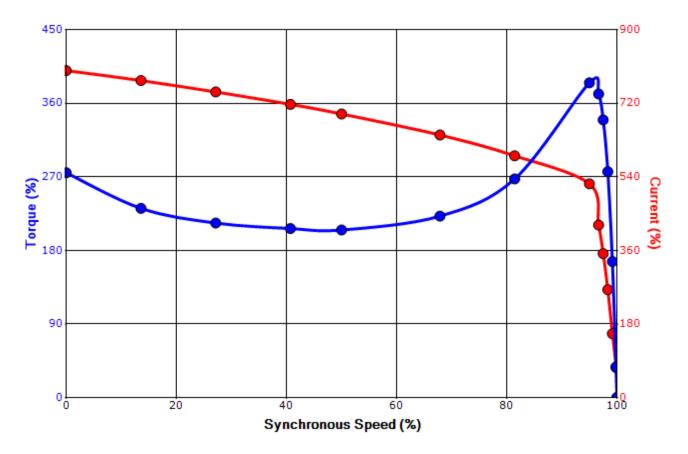




Customer	wk² Load Inertia (lb	ft²) -		
Customer PO	Load T	/pe -		
Sales Order	Voltage	(%) 100		
Project #	Accel. T	me -		


Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	neering bmammen Doc. Written By D. Suarez Doc.# / Rev MPCF-							
Engr. Date	7/17/2024	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011			

Motor Connection Diagram 3 Leads - Wye Connection Single Voltage

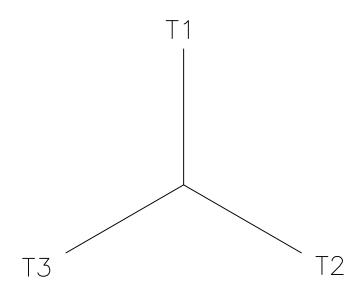

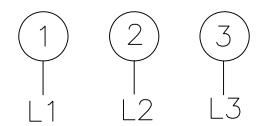

Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable. If multiple cables represent a single lead, each one of them will be labeled with the appropriate lead number.

By: R. Murillo Date: 4/9/08 Checked: Date: Revision 0