

#### NOTES:

- 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
- 2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
- 3. KEY DIMENSIONS EQUAL

0.375"x 0.375"x 2.88"

(MOTOR SUPPLIED WITH KEY)

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE

PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED

X CERTIFIED



TOTALLY ENCLOSED FAN COOLED
HORIZONTAL FOOT MOUNTED
3 PHASE INDUCTION MOTOR
254T-256T F1 ASSEMBLY

DRAWING #: MDSLV041-04

REV. DATE: 06/29/18 REV. #: 2 PER.: M. O'DOWD

REV. DESCRIP.:



| Issued Date | 6/20/2025 | Transmit # |  |
|-------------|-----------|------------|--|
| Issued By   | dschoeck  | Issued Rev |  |

### **TYPICAL MOTOR PERFORMANCE DATA**

Model: Y758XSSB41A-P

| HP        | kW  | Pole       | FL RPM | Frame | Voltage           | Hz             | Phase    | FL Amps         |
|-----------|-----|------------|--------|-------|-------------------|----------------|----------|-----------------|
| 7.50      | 5.5 | 8          | 865    | 256T  | 460               | 60             | 3        | 11.3            |
| Enclosure | IP  | Ins. Class | S.F.   | Duty  | NEMA<br>Nom. Eff. | NEMA<br>Design | kVA Code | Ambient<br>(°C) |
| TEFC      | 56  | F          | 1.15   | CONT  | 86.5              | В              |          | 40 C            |

| Load         | HP   | kW  | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|------|-----|---------|----------------|------------------|
| Full Load    | 7.50 | 5.6 | 11.3    | 88.7           | 70.0             |
| ¾ Load       | 5.63 | 4.2 | 9.4     | 88.4           | 63.1             |
| ½ Load       | 3.75 | 2.8 | 7.9     | 86.3           | 51.0             |
| ¼ Load       | 1.88 | 1.4 | 6.3     | 79.3           | 35.0             |
| No Load      |      |     | 5.8     |                | 4.7              |
| Locked Rotor |      |     | 49      |                | 39.5             |

| Torque    |                         |         |            |         |  |  |  |
|-----------|-------------------------|---------|------------|---------|--|--|--|
| Full Load | Locked Rotor            | Pull Up | Break Down | Inertia |  |  |  |
| (lb-ft)   | (lb-ft) (% FLT) (% FLT) |         |            |         |  |  |  |
| 45.5      | 195                     | 175     | 220        | 2.58    |  |  |  |

| Safe Stall | Time(s)      | Sound Bearings* Approx. Mo |          | Approx. Motor Weight |                      |  |
|------------|--------------|----------------------------|----------|----------------------|----------------------|--|
| Cold       | Hot Pressure |                            | Dearnigs |                      | Approx. Motor Weight |  |
| Colu       | 1100         | dB(A) @ 1M                 | DE       | NDE                  | (lbs)                |  |
| 35         | 15           | -                          | 6309ZZC3 | 6309ZZC3             |                      |  |

\*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global 840 Mounting:Footed,Shaft:T Shaft

| Customer    |  |
|-------------|--|
| Customer PO |  |
| Sales Order |  |
| Project #   |  |

Tag:

| TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A. |             |                  |             |             |               |  |  |  |  |
|---|-------------|------------------|-------------|-------------|---------------|--|--|--|--|
| Engineering   | aguerrettaz | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1119 / 0 |  |  |  |  |
| Engr. Date  | 1/17/2019   | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |  |  |  |  |



| <b>Issued Date</b> 6/20/2025 |          | Transmit # |  |
|------------------------------|----------|------------|--|
| Issued By                    | dschoeck | Issued Rev |  |

### **TYPICAL MOTOR PERFORMANCE DATA**

Model: Y758XSSB41A-P

| HP        | kW  | Pole       | FL RPM | Frame | Voltage           | Hz             | Phase    | FL Amps         |
|-----------|-----|------------|--------|-------|-------------------|----------------|----------|-----------------|
| 5         | 3.7 | 8          | 720    | 256T  | 380               | 50             | 3        | 9.8             |
| Enclosure | IP  | Ins. Class | S.F.   | Duty  | NEMA<br>Nom. Eff. | NEMA<br>Design | kVA Code | Ambient<br>(°C) |
| TEFC      | 56  | F          | 1.0    | CONT  | 84.8              | В              |          | 40 C            |

| Load         | HP   | kW  | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|------|-----|---------|----------------|------------------|
| Full Load    | 5.00 | 3.7 | 9.9     | 87.4           | 65.8             |
| ¾ Load       | 3.75 | 2.8 | 8.5     | 86.5           | 57.7             |
| ∕₂ Load      | 2.50 | 1.9 | 7.4     | 83.4           | 45.3             |
| 4 Load       | 1.25 | 0.9 | 4.3     | 80.3           | 40.8             |
| No Load      |      |     | 5.7     |                | 5.0              |
| _ocked Rotor |      |     | 46      | 1              | 41.3             |

| Torque    |                                 |         |            |         |  |  |  |
|-----------|---------------------------------|---------|------------|---------|--|--|--|
| Full Load | Locked Rotor                    | Pull Up | Break Down | Inertia |  |  |  |
| (lb-ft)   | (lb-ft) (% FLT) (% FLT) (% FLT) |         |            |         |  |  |  |
| 36.5      | 230                             | 210     | 250        | 2.58    |  |  |  |

| Ī | Safe Stall | Time(s) | Sound      | essure Bearings* |          | Approx. Motor Weight |
|---|------------|---------|------------|------------------|----------|----------------------|
|   | Cold       | Hot     | Pressure   |                  |          | Approx. Motor Weight |
| L | Oolu       | 1100    | dB(A) @ 1M | DE               | NDE      | (lbs)                |
|   | 35         | 15      | -          | 6309ZZC3         | 6309ZZC3 |                      |

\*Bearings are the only recommended spare part(s).

Motor Options: Product Family:EQP Global 840 Mounting:Footed,Shaft:T Shaft

| Customer    |  |
|-------------|--|
| Customer PO |  |
| Sales Order |  |
| Project #   |  |

Tag:

| TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A. |  |                  |             |             |          |  |  |  |
|---|--|------------------|-------------|-------------|----------|--|--|--|
| Engineering   | aguerrettaz Doc. Written By D. Suarez Doc.# / Rev MPCF-1 |                  |             |             |          |  |  |  |
| Engr. Date  | 3/7/2019   | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011 |  |  |  |




| Issued Date 6/20/2025 |          | Transmit # |  |
|-----------------------|----------|------------|--|
| Issued By             | dschoeck | Issued Rev |  |

### SPEED TORQUE/CURRENT CURVE

Model: Y758XSSB41A-P

| HP                   | kW                    | Pole       | FL RPM | Frame | Voltage           | Hz             | Phase    | FL Amps         |
|----------------------|-----------------------|------------|--------|-------|-------------------|----------------|----------|-----------------|
| 7.50                 | 5.5                   | 8          | 865    | 256T  | 460               | 60             | 3        | 11.3            |
| Enclosure            | IP                    | Ins. Class | S.F.   | Duty  | NEMA<br>Nom. Eff. | NEMA<br>Design | kVA Code | Ambient<br>(°C) |
| TEFC                 | 56                    | F          | 1.15   | CONT  | 86.5              | В              |          | 40 C            |
| Looked Beton         | Rotor wk <sup>2</sup> |            | Torque |       |                   |                |          |                 |
| Locked Rotor<br>Amps | Inertia               | Full Load  | Locked | Rotor | Pull Up           | )              | Break    | Down            |
| Amps                 | (lb-ft²)              | (lb-ft)    | (%)    |       | (%)               |                | (%       | <b>%)</b>       |
| 49                   | 2.58                  | 45.5       | 195    |       | 175               |                | 22       | 20              |

# Design Values

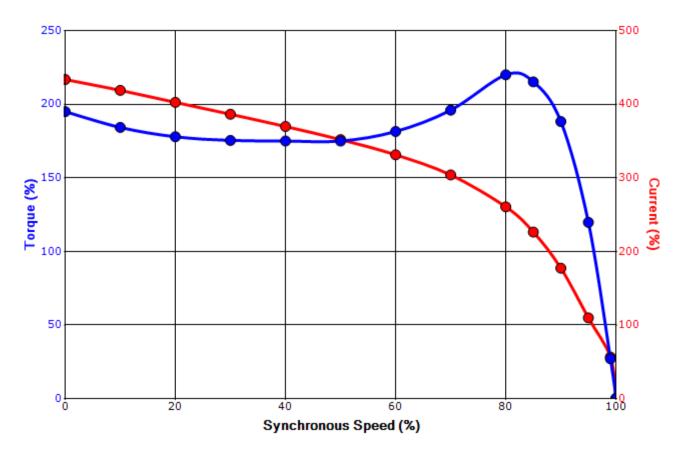



| Customer    | wk² Load Inertia (Ib-f | 2) -   |
|-------------|------------------------|--------|
| Customer PO | Load Typ               | е -    |
| Sales Order | Voltage (%             | 6) 100 |
| Project #   | Accel. Tim             | е -    |

Tag:

| TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A. |             |                  |             |             |               |  |  |  |
|---|-------------|------------------|-------------|-------------|---------------|--|--|--|
| Engineering   | aguerrettaz | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1121 / 0 |  |  |  |
| Engr. Date  | 1/17/2019   | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |  |  |  |




| Issued Date | sued Date 6/20/2025 |            |  |
|-------------|---------------------|------------|--|
| Issued By   | dschoeck            | Issued Rev |  |

### SPEED TORQUE/CURRENT CURVE

Model: Y758XSSB41A-P

| HP                   | kW                    | Pole       | FL RPM | Frame        | Voltage           | Hz             | Phase    | FL Amps         |  |
|----------------------|-----------------------|------------|--------|--------------|-------------------|----------------|----------|-----------------|--|
| 5                    | 3.7                   | 8          | 720    | 256T         | 380               | 50             | 3        | 9.8             |  |
| Enclosure            | IP                    | Ins. Class | S.F.   | Duty         | NEMA<br>Nom. Eff. | NEMA<br>Design | kVA Code | Ambient<br>(°C) |  |
| TEFC                 | 56                    | F          | 1.0    | CONT         | 84.8              | В              |          | 40 C            |  |
| Laskad Datas         | Rotor wk <sup>2</sup> |            | Torque |              |                   |                |          |                 |  |
| Locked Rotor<br>Amps | Inertia               | Full Load  | Locked | Locked Rotor |                   | Pull Up        |          | Break Down      |  |
| Amps                 | (lb-ft²)              | (lb-ft)    | (%)    |              | (%)               |                | (%       | <b>%)</b>       |  |
| 46                   | 2.58                  | 36.5       | 230    |              | 210               |                | 250      |                 |  |

# Design Values

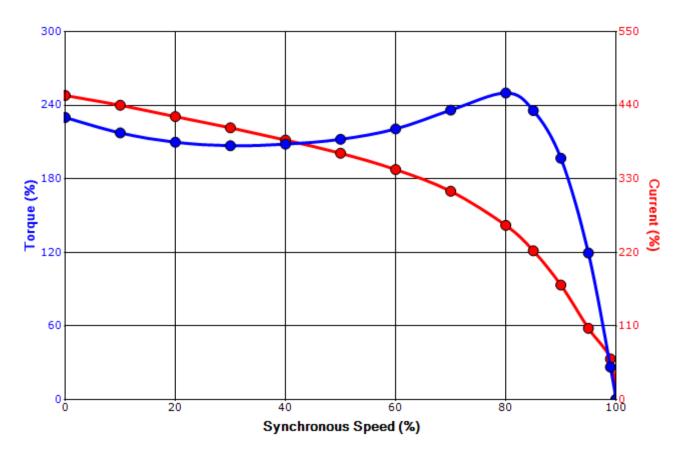





| Customer    | wk² Load Inertia (lb-ft²) | -   |
|-------------|---------------------------|-----|
| Customer PO | Load Type                 | -   |
| Sales Order | Voltage (%)               | 100 |
| Project #   | Accel. Time               | _   |

Tag:

| TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.              |          |                  |             |             |          |  |  |  |
|--|----------|------------------|-------------|-------------|----------|--|--|--|
| Engineering aguerrettaz Doc. Written By D. Suarez Doc.# / Rev MPCF-112 |          |                  |             |             |          |  |  |  |
| Engr. Date   | 3/7/2019 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011 |  |  |  |

## Motor Connection Diagram 3 Leads - Delta Connection





Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable. If multiple cables represent a single lead, each one of them will be labeled with the appropriate lead number.

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 0



| Issued Date: | <b>Issued Date:</b> 6/20/2025 |             |  |
|--------------|-------------------------------|-------------|--|
| Issued By:   | dschoeck                      | Issued Rev: |  |

#### **SPARE PARTS LIST\***

Model: Y758XSSB41A-P

| HP        | kW  | Pole       | FL RPM | Frame | Voltage           | Hz             | Phase    | FL Amps         |
|-----------|-----|------------|--------|-------|-------------------|----------------|----------|-----------------|
| 7.50      | 5.5 | 8          | 865    | 256T  | 460               | 60             | 3        | 11.3            |
| Enclosure | IP  | Ins. Class | S.F.   | Duty  | NEMA<br>Nom. Eff. | NEMA<br>Design | kVA Code | Ambient<br>(°C) |
| TEFC      | 56  | F          | 1.15   | CONT  | 86.5              | В              |          | 40 C            |

 Bearings DE
 6309ZZC3 / 45BC03JPP3OX

 Bearings NDE
 6309ZZC3 / 45BC03JPP3OX

\*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

| Customer    |  |
|-------------|--|
| Customer PO |  |
| Sales Order |  |
| Project #   |  |

Tag:

| TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A. |             |                  |             |             |               |  |  |
|---|-------------|------------------|-------------|-------------|---------------|--|--|
| Engineering   | aguerrettaz | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1125 / 0 |  |  |
| Engr. Date  | 1/17/2019   | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |  |  |