

- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90~INCREMENTS
 2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
 3. KEY DIMENSIONS EQUAL (MOTOR SUPPLIED WITH KEY)

UNITS: mm

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

PERMANENT MAGNET 71 IEC
TEFC (IP55) B3 ALUMINUM FRAME

MDSLE024-01

TOLERANCES	
.X	.1
.XX	.03
.XXX	.005
.XXXX	.0005
MAXIMUM MOTOR WEIGHT	
XXX kgs.	
(XXX lbs.)	

0	FIRST ISSUE	R. Roth	08/24/16		
NO	REVISION	DRAWN BY	DATE	CHECK	

Tosh-ECO PM

TOSHIBA
TOSHIBA INTERNATIONAL CORPORATION

DRAWN BY: _____
CHECK BY: _____
APPROVED BY: _____

www.toshiba.com/ind

TOSHIBA

Issued Date 12/9/2016

Transmit #

Issued By Yu Wenhao

Issued Rev

TYPICAL MOTOR PERFORMANCE DATA

Model: PM3

	kW	Pole	r/min	Frame	BEMF K_E Volt. (V)	Hz	Phase	I_N Amps (A)
	0.75	6	4500	71M	290	225	3	1.6
	IP	Ins. Class		Duty	Nom. Eff.			Ambient (°C)
	55	F		S1	88.2			40

Load	kW	Amperes (A)	Efficiency (%)
Full Load	0.75	1.62	88.2
¾ Load	0.57	1.33	86.1
½ Load	0.38	0.92	81.9
¼ Load	0.19	0.47	70.9
No Load		0.24	

Torque			Rotor wk^2 Inertia (kg-m ²)
Full Load (N-m)		Breakdown (% FLT)	
1.59		260	0.00045

	Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (kg)
		DE	NDE	
	67	6202-2RS	6202-2RS	5

*Bearings are the only recommended spare part(s).

Motor Options:

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values. The declared locked rotor current has a tolerance of 20%.

TOSHIBA INTERNATIONAL CORPORATION - HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MPCF-1190 / 0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	12/6/2016



Issued Date	12/9/2016	Transmit #	
Issued By	Yu Wenhao	Issued Rev	


SPEED TORQUE/CURRENT CURVE

Model: PM3

	kW	Pole	r/min	Frame	BEMF K_E Volt. (V)	Hz	Phase	I_N Amps (A)
	0.75	6	4500	71M	290	225	3	1.6
	IP	Ins. Class		Duty	Nom. Eff.			Ambient (°C)
	55	F		S1	88.2			40
	Rotor wk^2 Inertia (kg-m ²)	Torque			Breakdown (%)			
		Full Load (N-m)						
	0.00045	1.59			260			

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase synchronous motor

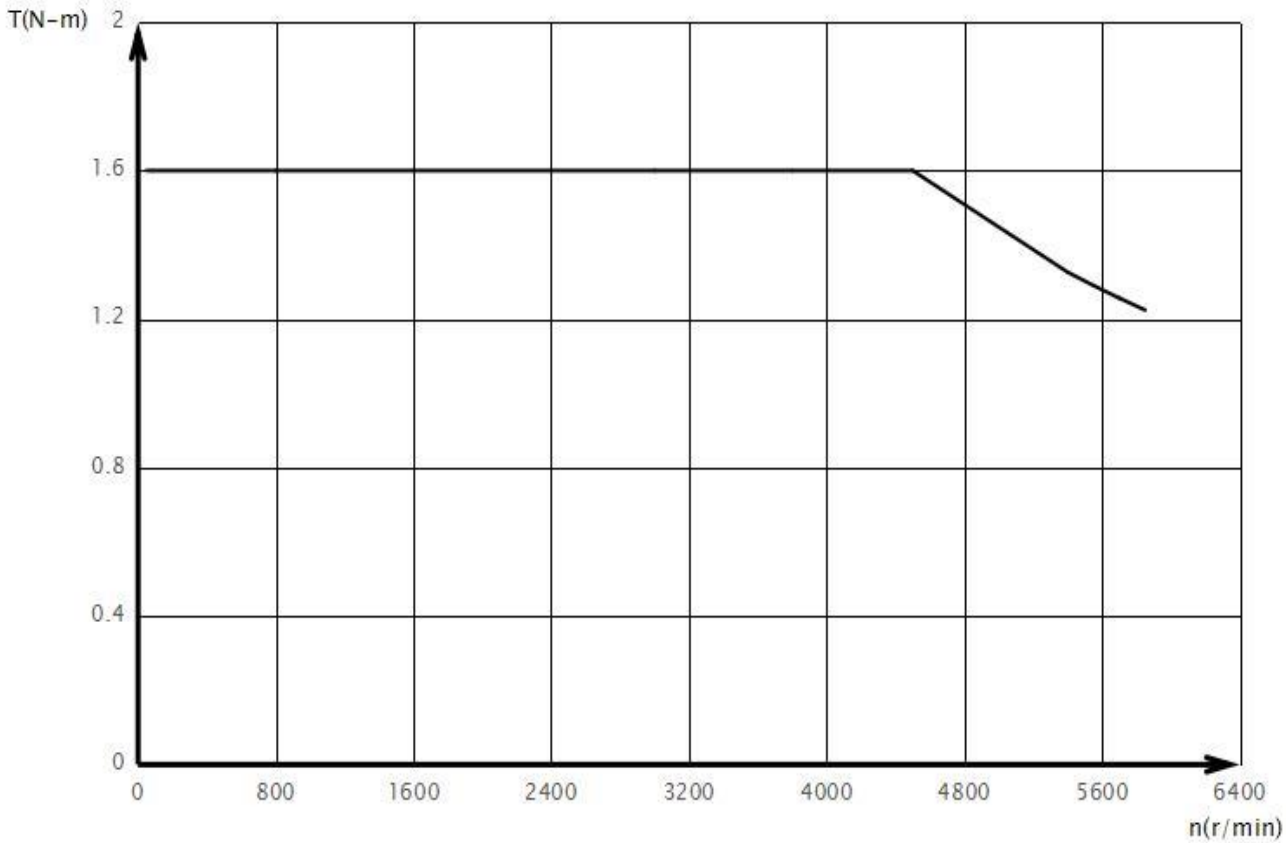

Customer		wk^2 Load Inertia (kg-m ²)		
Customer PO			Load Type	CONT
Sales Order			Voltage (%)	
Project #			Accel. Time	10-15S

Tag:

All characteristics are average expected values. The declared locked rotor current has a tolerance of 20%.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MPCF-1192 / 0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	12/6/2016



Issued Date 12/9/2016

Transmit #

Issued By Yu Wenhao

Issued Rev

SPARE PARTS LIST*

Model: PM3

	kW	Pole	r/min	Frame	BEMF K _E Volt. (V)	Hz	Phase	I _N Amps (A)
	0.75	6	4500	71M	290	225	3	1.6
	IP	Ins. Class		Duty	Nom. Eff.			Ambient (°C)
	55	F		S1	88.2			40

DE Bearing: 6202-2RS

NDE Bearing: 6202-2RS

*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MPCF-1193 / 0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	12/6/2016



Issued Date	12/9/2016	Transmit #	
Issued By	Yu Wenhao	Issued Rev	

NAMEPLATE DATA

Model: PM3

	kW	Pole	r/min	Frame	BEMF K _E Volt. (V)	Hz	Phase	I _N Amps (A)
	0.75	6	4500	71M	290	225	3	1.6
	IP	Ins. Class		Duty	Nom. Eff.			Ambient (°C)
	55	F		S1	88.2			40

Drive End Bearing: 6202-2RS

Non-Drive End Bearing: 6202-2RS

Rated Torque: 1.59 Nm

Voltage Constant (K_e): 1.23 VS

Torque Constant (K_t): 0.98 Nm/A

BEMF at: 4500 r/min

Comments 1: _____

Customer	
Customer PO	
Sales Order	
Project #	

Tag: _____

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MPCF-1191 / 0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	12/6/2016

TOSHIBA

Motor Connection Diagrams

