

TECHNICAL INFORMATION

1. BEARING LUBRICATION DE: POLYREX EM
ODE: POLYREX EM
2. BEARING TYPE DE: SEE TABLE
ODE: 6318C3
3. WINDING TEMP. DETECTORS
NUMBER AND TYPE: 6xRTD(PtO°C-100ohm)
LOCATION: IN STATOR SLOT
4. BEARING TEMP. DETECTORS
NUMBER AND TYPE: N/A
5. SPACE HEATER 1 PHASE
VOLTS: 120V WATTS: 240W
6. ROTATION: CCW VIEWED FROM NON DRIVE END
THIS MOTOR IS BI DIRECTIONAL
7. MOTOR PAINT COLOR: GREEN
8. APPROX. WEIGHT: 4000 Lbs
9. ACCESORIES:

DRIVE END BEARINGS		
BELT DRIVE APP.	DIRECT COUPLE APP.	
LS 4-8P	LS 6-8P	LS 4P
NU322C3	6322C3	6318C3

DRAWING LIST	
MAIN TERMINAL BOX 130P-7622-55W	
AUX TERMINAL BOX FOR	
SPACE HEATER	130P-7520-50
R.T.D.	130P-7522-51
THERMISTOR	-

PRODUCTION #	-	0	FIRST ISSUE	ME	7/24/19
UNITS:	INCHES	NO.	REVISION	BY	DATE

MOTOR OUTLINE FOR THREE PHASE INDUCTION MOTOR

CUSTOMER NAME				P.O. NO.	MOTOR TAG NO.
OUTPUT HP	POLE 4-8	VOLTAGE 2.3/4k V	FREQUENCY Hz	FULL LOAD SPEED (min ⁻¹)	TOSHIBA MODEL NO.
TYPE	FORM	INS. CLASS F	RATING CONT.	FRAME B447/9T	S.F. ENCLOSURE TEFC

TOSHIBA INTERNATIONAL CORPORATION
HOUSTON, TEXAS U.S.A.

3rd ANGLE PROJ.	PREPARED BY: M.Easterbrook	DATE: 7/24/19	CHECKED BY:	DATE:	DRAWING NO.: MDSL0072-43	REV. 0
-----------------	----------------------------	---------------	-------------	-------	--------------------------	--------

TYPICAL MOTOR PERFORMANCE DATA

Model: 2008XDAK41A-A

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
200	150	8	890	B449T	2300/4000	60	3	55/32
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	56	F	1.15	CONT	95.0	B		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	200.00	149.1	32	95.0	69.9
¾ Load	150.00	111.9	26	94.0	64.1
½ Load	100.00	74.6	22	91.8	53.2
¼ Load	50.00	37.3	16.7	85.5	37.6
No Load			17.7		3.0
Locked Rotor			202		18.8

Torque				Rotor wk ² Inertia (lb-ft ²)
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	
1180	130	125	235	223.51

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
35	15	83	6322C3	6318C3	

*Bearings are the only recommended spare part(s).

Motor Options:
Mounting:Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


Engineering	SSuryani	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	12/18/2019	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

SPEED TORQUE/CURRENT CURVE

Model: 2008XDAK41A-A

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
200	150	8	890	B449T	2300/4000	60	3	55/32
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	56	F	1.15	CONT	95.0	B		40 C
Locked Rotor Amps	Rotor wk ² Inertia (lb-ft ²)	Torque						Break Down (%)
		Full Load (lb-ft)	Locked Rotor (%)	Pull Up (%)				
202	223.51	1180	130	125			235	

Design Values

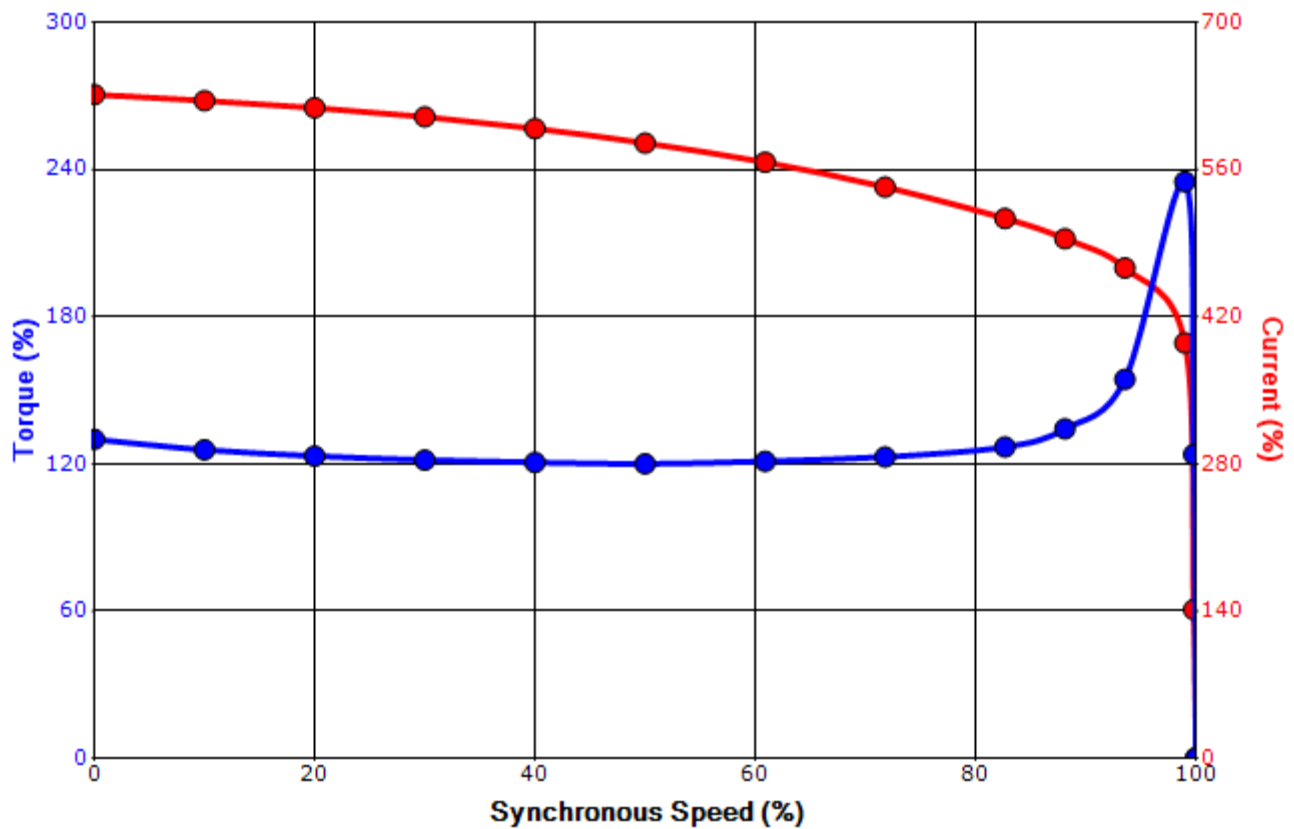

Customer		wk ² Load Inertia (lb-ft ²)	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.


TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering	SSuryani	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	12/18/2019	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

Motor Connection Diagrams
6 Leads

Across-the-Line Starting / Running Connections

Low Voltage – Delta

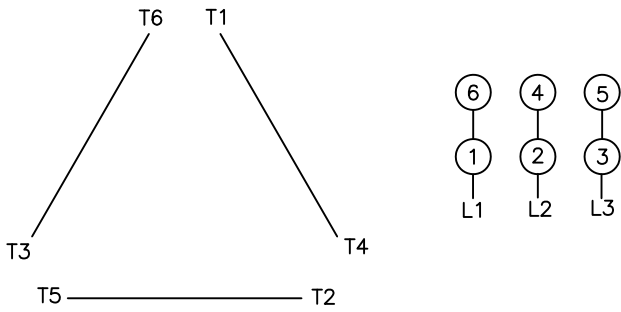

High Voltage – Wye



Switch L1 and L2 to reverse rotation