


AIR DEFLECTOR USED ON
500HP 2P
600HP 2P-6P
700HP 2P-6P
800HP 2P-4P

1/2"-13 UNC GND BOLT

Ø3/4"-10 UNC 4 PLACES
FOR JACKING BOLTS

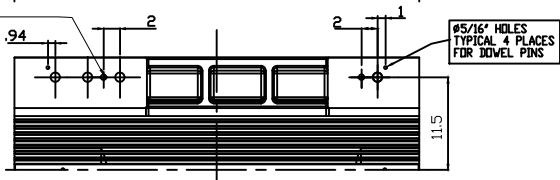

Ø5/16" HOLES
TYPICAL 4 PLACES
FOR DOWEL PINS

UNITS: INCHES

FRAME SIZE	MOTOR DIMENSIONS											CONDUIT BOX							
	A	B	C	D	G	J	K	M	O	P	T	AA	AB	AC	AE	AF	XL	XN	
5809/10/11USS	28.0	50.3	76.3	14.50	1.6	6.3	16.5/11.4	29.7	29.7	35.0	4.8	4.00	31.3	24.0	23.8	8.7	23.4	18.9	
5809/10/11US	28.0	50.3	76.8	14.50	1.6	6.3	16.5/11.4	29.7	29.7	35.0	4.8	4.00	31.3	24.0	23.8	8.7	23.4	18.9	
5809/10/11UZ	28.0	50.3	82.2	14.50	1.6	6.3	16.5/11.4	29.7	29.7	35.0	4.8	4.00	31.3	24.0	23.8	8.7	23.4	18.9	

FRAME SIZE	MOUNTING				SHAFT EXTENSION			KEY SEAT			BEARINGS		MAXIMUM WEIGHT
	E	2F	H	BA	N-W	V	U	R	S	ES	LS	OS	
5809/10/11USS	11.50	32.00/36.00/40.00	1.125	10.00	5.74	5.65	2.625	2.275	0.625	3.03	6315C3	6315C3	7000 lbs.
5809/10/11US	11.50	32.00/36.00/40.00	1.125	10.00	6.25	6.19	4.000	3.436	1.000	5.03	6322C3	6322C3	
5809/10/11UZ	11.50	32.00/36.00/40.00	1.125	10.00	11.62	11.38	5.250	4.550	1.250	10.03	NU328C3	6322C3	

- NOTES:
1. DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT
 2. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 3. KEY DIMENSIONS EQUAL S x S x 10.00 FOR UZ, S x S x 5.00 FOR US, AND S x S x 3.00 FOR USS (MOTOR SUPPLIED WITH KEY)
 4. MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME
 5. THIS DIMENSION EQUALS 2F FOR 5810USS/US/UZ MOUNTING
 6. THIS DIMENSION EQUALS 2F FOR 5809USS/US/UZ MOUNTING
 7. STANDARD 4~8 POLE PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE
 8. STANDARD 2 POLE PRODUCT USE UNI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY FAN AND CONNECTION CHANGE

CUSTOMER: _____ MOTOR MODEL NO.: _____

P.O. NO.: _____ HP: _____ VOLTAGE: _____ RPM(SYN.): _____ Hz: _____

FRAME SIZE: _____ PRODUCT TYPE: TEFC EQP III, EPACKT, & HIGH EFFICIENCY

COMMENTS: _____

PER: _____ DATE: _____

TAG NO's.:
.
.
.
.
.
.
.
.
.

STANDARD (NO AUX. BOXES)

RTD AUX. BOX

SPACE HEATER AUX. BOX

BEARING RTD's

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED CERTIFIED

TOSHIBA

TOSHIBA INTERNATIONAL CORPORATION

TOTALLY-ENCLOSED FAN-COOLED
HORIZONTAL FOOT-MOUNTED
3 PHASE INDUCTION MOTOR
F1 ASSEMBLY

XT SERIES

VISIT OUR WEBSITE AT:
www.toshiba.com/ind

TYPICAL MOTOR PERFORMANCE DATA

Model: 8003FTAB11F-A

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
800	597	2	3580	5811USS	460	60	3	911
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	H	1.0	CONT	96.2	-		40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	800.00	596.6	910	96.1	85.6
¾ Load	600.00	447.4	693	95.5	84.8
½ Load	400.00	298.3	488	94.1	81.4
¼ Load	200.00	149.1	306	89.8	68.0
No Load			193.4		5.3
Locked Rotor			5429		28.5

Torque				Rotor wk ²
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	Inertia (lb-ft ²)
1174	190	125	290	201.76

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
18	9	-	6315C3	6315C3	

*Bearings are the only recommended spare part(s).

Motor Options:
Product Family:EQP Global SD
Mounting:Footed,Shaft:USS Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


Engineering	zxie	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	5/22/2020	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

SPEED TORQUE/CURRENT CURVE

Model: 8003FTAB11F-A

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
800	597	2	3580	5811USS	460	60	3	911
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	54	H	1.0	CONT	96.2	-		40 C
Locked Rotor Amps	Rotor wk ² Inertia (lb-ft ²)	Torque						Break Down (%)
		Full Load (lb-ft)	Locked Rotor (%)	Pull Up (%)				
5429	201.76	1174	190	125			290	

Design Values

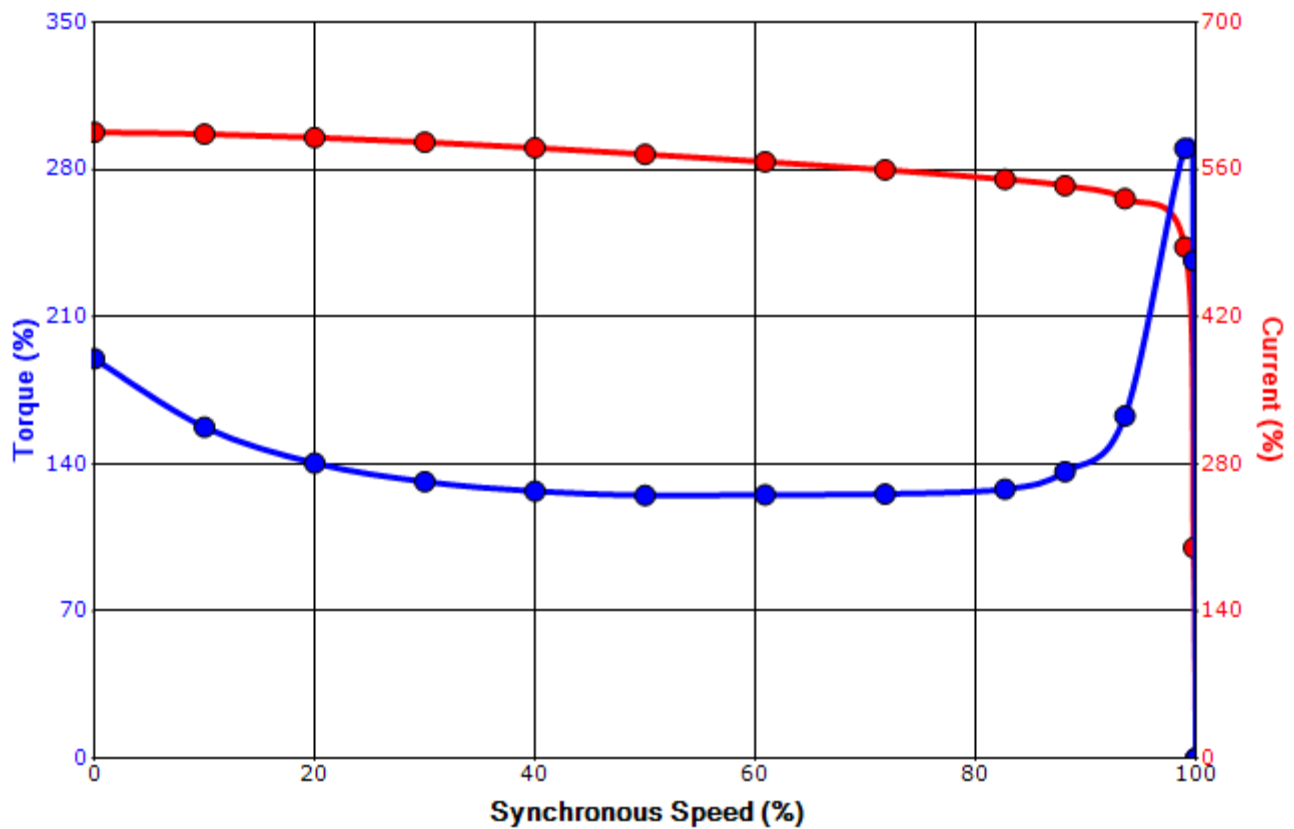

Customer		wk ² Load Inertia (lb-ft ²)	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering	zxie	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	5/22/2020	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

Motor Connection Diagram

12 Leads

Single Voltage



Switch L1 and L2 to reverse rotation