



Issued Date 12/9/2016

Transmit #

Issued By Yu Wenhao

Issued Rev

TYPICAL MOTOR PERFORMANCE DATA

Model: PM35

	kW	Pole	r/min	Frame	BEMF K_E Volt. (V)	Hz	Phase	I_N Amps (A)
	15	6	3600	132M	294	180	3	31
	IP	Ins. Class		Duty	Nom. Eff.			Ambient (°C)
	55	F		S1	94.0			40

Load		kW	Amperes (A)	Efficiency (%)
Full Load		15.00	30.5	94.0
¾ Load		11.25	23.6	92.9
½ Load		7.50	16.7	90.6
¼ Load		3.75	9.08	84.2
No Load			3.06	

Torque			Rotor wk² Inertia (kg-m²)
Full Load (N-m)		Breakdown (% FLT)	
39.9		260	0.025

	Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (kg)
		DE	NDE	
	79	6208-2Z/C3	6206-2Z/C3	54

*Bearings are the only recommended spare part(s).

Motor Options:

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values. The declared locked rotor current has a tolerance of 20%.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MPCF-1190 / 0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	12/6/2016



Issued Date	12/9/2016	Transmit #	
Issued By	Yu Wenhao	Issued Rev	


SPEED TORQUE/CURRENT CURVE

Model: PM35

	kW	Pole	r/min	Frame	BEMF K_E Volt. (V)	Hz	Phase	I_N Amps (A)
	15	6	3600	132M	294	180	3	31
	IP	Ins. Class		Duty	Nom. Eff.			Ambient (°C)
	55	F		S1	94.0			40
	Rotor wk² Inertia (kg-m²)	Torque						Breakdown (%)
		Full Load (N-m)						
	0.025	39.9						260

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase synchronous motor

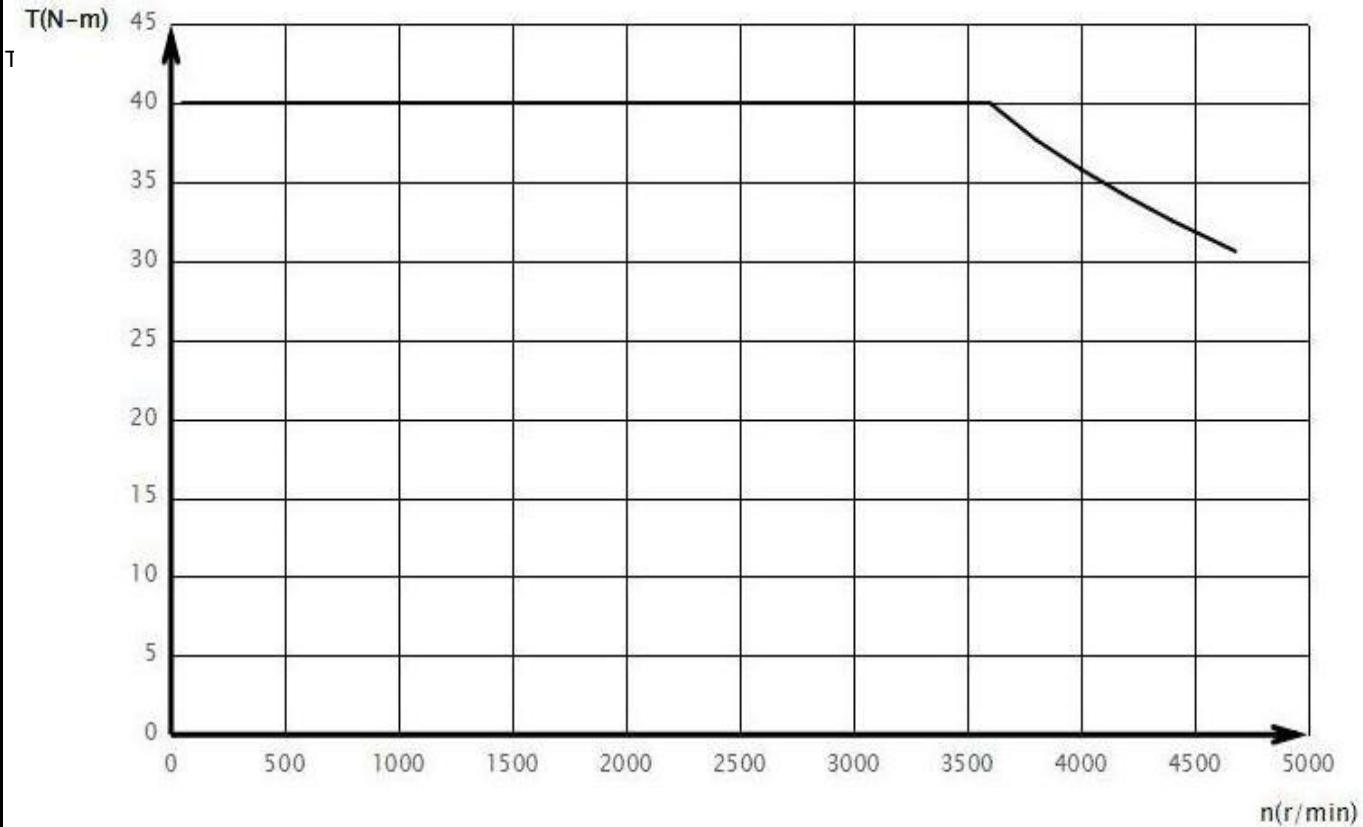

Customer		wk ² Load Inertia (kg-m ²)		
Customer PO			Load Type	CONT
Sales Order			Voltage (%)	
Project #			Accel. Time	10-15S

Tag:

All characteristics are average expected values. The declared locked rotor current has a tolerance of 20%.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MPCF-1192 / 0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	12/6/2016

TOSHIBA

Issued Date 12/9/2016

Transmit #

Issued By Yu Wenhao

Issued Rev

SPARE PARTS LIST*

Model: PM35

	kW	Pole	r/min	Frame	BEMF K _E Volt. (V)	Hz	Phase	I _N Amps (A)
	15	6	3600	132M	294	180	3	31
	IP	Ins. Class		Duty	Nom. Eff.			Ambient (°C)
	55	F		S1	94.0			40

DE Bearing: 6208-2Z/C3

NDE Bearing: 6206-2Z/C3

*Bearings are the only recommended spare part(s).

Other than the grease used for regreasable bearings and the oil used for oil-lubricated bearings, Toshiba advises that there are no "use" parts. The only insurance spares that Toshiba suggests for these squirrel-cage induction motors are industry-standard and commercially available off-the-shelf bearings as noted above.

Motor components such as terminal boxes, fan covers and other machined parts are available on special request. In these cases, please advise our order entry department of the model and serial numbers found on the motor nameplate and a description of the needed components. With this information they will be able to furnish the current part number, price and availability.

Note: Our internal part numbers are subject to change without notice and are not published.

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MPCF-1193 / 0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	12/6/2016



Issued Date	12/9/2016	Transmit #	
Issued By	Yu Wenhao	Issued Rev	

NAMEPLATE DATA

Model: PM35

	kW	Pole	r/min	Frame	BEMF K _E Volt. (V)	Hz	Phase	I _N Amps (A)
	15	6	3600	132M	294	180	3	31
	IP	Ins. Class		Duty	Nom. Eff.			Ambient (°C)
	55	F		S1	94.0			40

Drive End Bearing: 6208-2Z/C3

Non-Drive End Bearing: 6206-2Z/C3

Rated Torque: 39.9 Nm

Voltage Constant (K_e): 0.779 VS

Torque Constant (K_t): 1.35 Nm/A

BEMF at: 3600 r/min

Comments 1:

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION - HOUSTON, TEXAS U.S.A.

Engineering		Doc. Written By	P. Anderson	Doc.# / Rev	MPCF-1191 / 0
Engr. Date		Doc. Approved By	PAA	Doc. Issued	12/6/2016

TOSHIBA

Motor Connection Diagrams

